




Copyright FCJ.

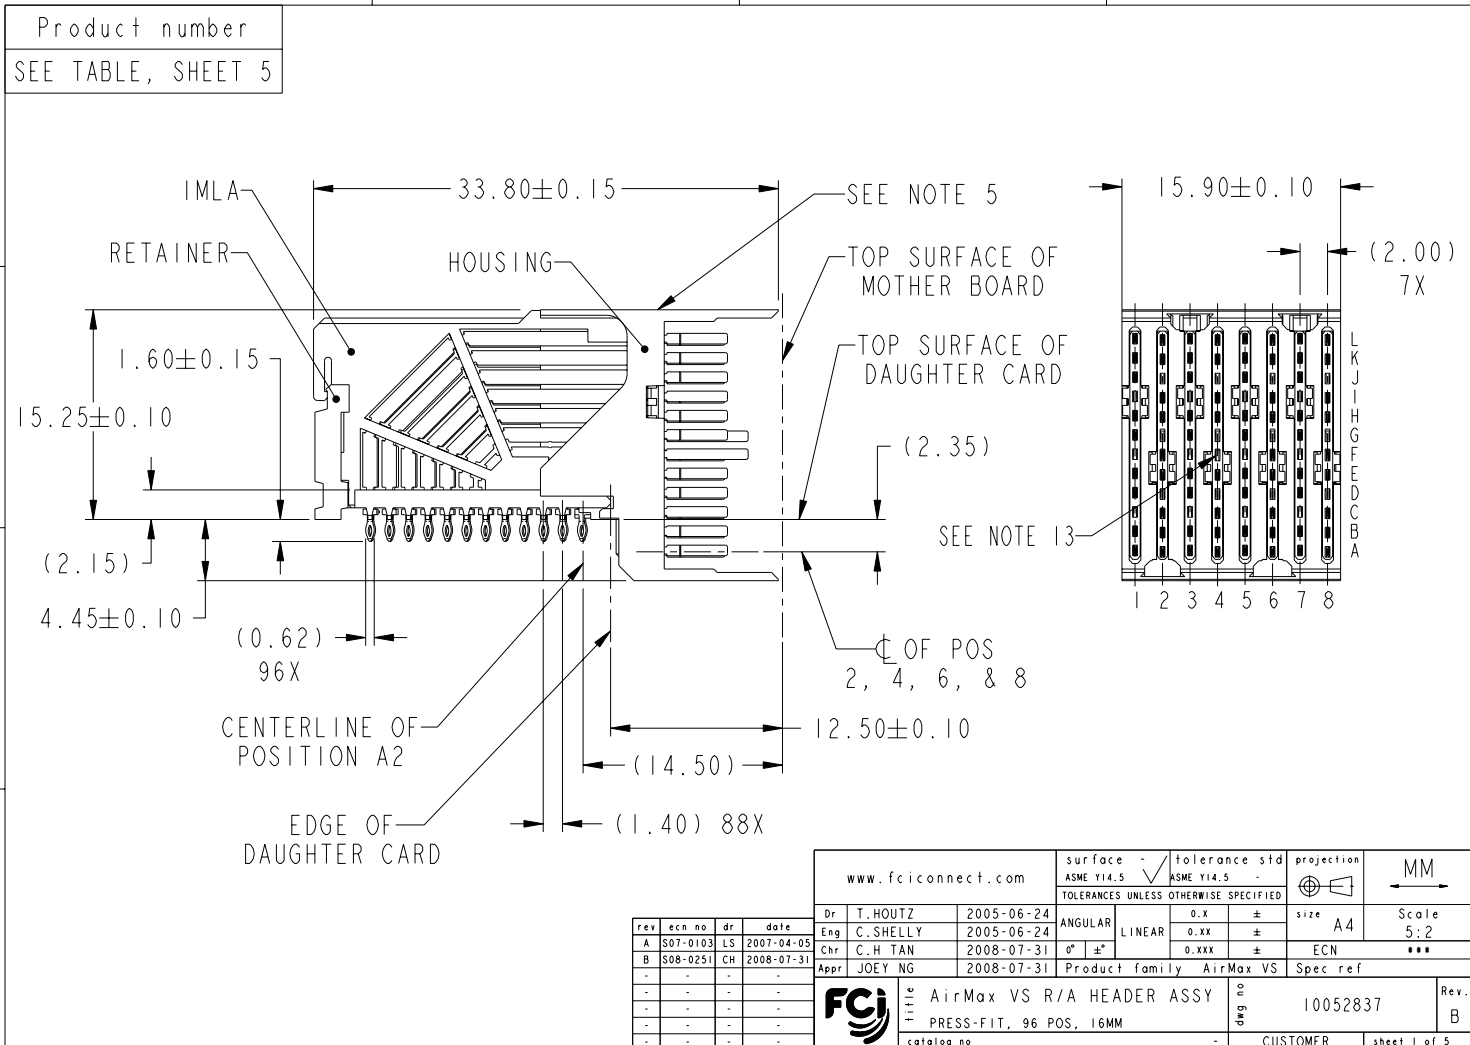

rev	ecm no	dr	date
A	S07-0103	LS	2007-04-05
B	S08-0251	CH	2008-07-31
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		surface	tolerance std	projection	MM
		ASME Y14.5	ASME Y14.5		Scale
		TOLERANCES UNLESS OTHERWISE SPECIFIED			5:2
Dr	T. HOUTZ	2005-06-24	ANGULAR	0.x	±
Eng	C. SHELLY	2005-06-24	LINEAR	0.xx	±
Chr	C. H TAN	2008-07-31	0° ±	0.xxx	±
Appr	JOEY NG	2008-07-31	Product family	AirMax VS	ECN
				size	A4
				Spec ref	***
AirMax VS R/A HEADER ASSY PRESS-FIT, 96 POS, 16MM				part no	10052837
catalog no				CUSTOMER	sheet 1 of 5
				Rev.	B

REV F - 2008-04-17

PDM: Rev:B


STATUS:Released

Printed: Dec 01, 2010



Copyright FCJ.

	1	2	3	4
	DESCRIPTION	DIM A	DIM B	DIM C
A	2-16MM MODULES PLACED END-TO-END	2.00	15.90 2X	16.00
	1-16MM MODULE & 1-18MM MODULE PLACED END-TO-END	3.00	15.90 1X & 17.90 1X	17.00

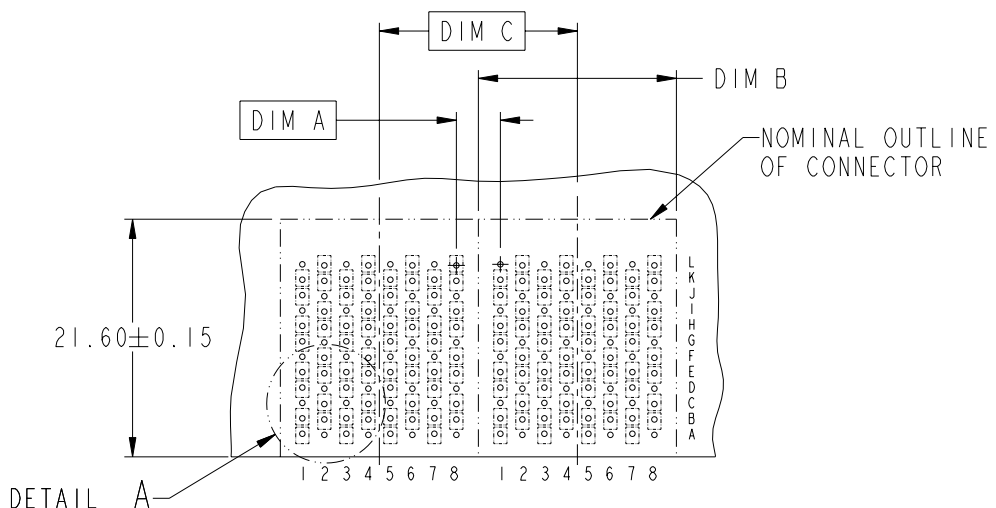

RECOMMENDED PCB LAYOUT
FOR DIFFERENTIAL APPLICATIONS
COMPONENT SIDE
(TWO ADJACENT FOOTPRINTS SHOWN)
NOTES 6 & 7


	title	AirMax VS R/A HEADER ASSY	Rev.	B
	catalog no	PRESS-FIT, 96 POS, 16MM	sheet 2 of 5	
	drwg no	10052837	CUSTOMER	

REV F - 2008-04-17



Copyright FCJ.

DESCRIPTION	DIM D	DIM E	DIM F
2-16MM MODULES PLACED END-TO-END	2.00	15.90 2X	16.00
1-16MM MODULE & 1-18MM MODULE PLACED END-TO-END	3.00	15.90 1X & 17.90 1X	17.00

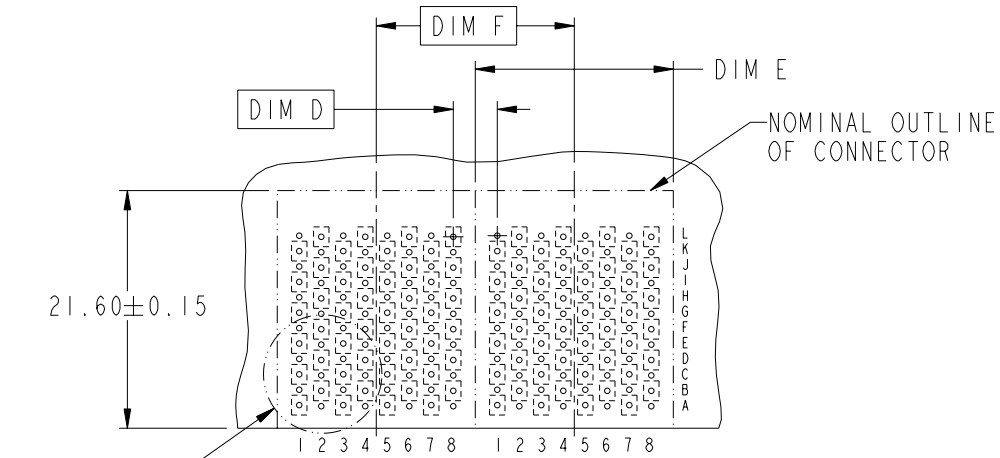

RECOMMENDED PCB LAYOUT
FOR SINGLE ENDED APPLICATIONS
COMPONENT SIDE
(TWO ADJACENT FOOTPRINTS SHOWN)
NOTES 6 & 7


	title	AirMax VS R/A HEADER ASSY	drwg no	10052837	Rev.	B
	catalog no	PRESS-FIT, 96 POS, 16MM	-	CUSTOMER	sheet	3 of 5

REV F - 2000-04-17

PDM: Rev:B STATUS:Released ⁴Printed: Dec 01, 2010



Copyright FCJ.

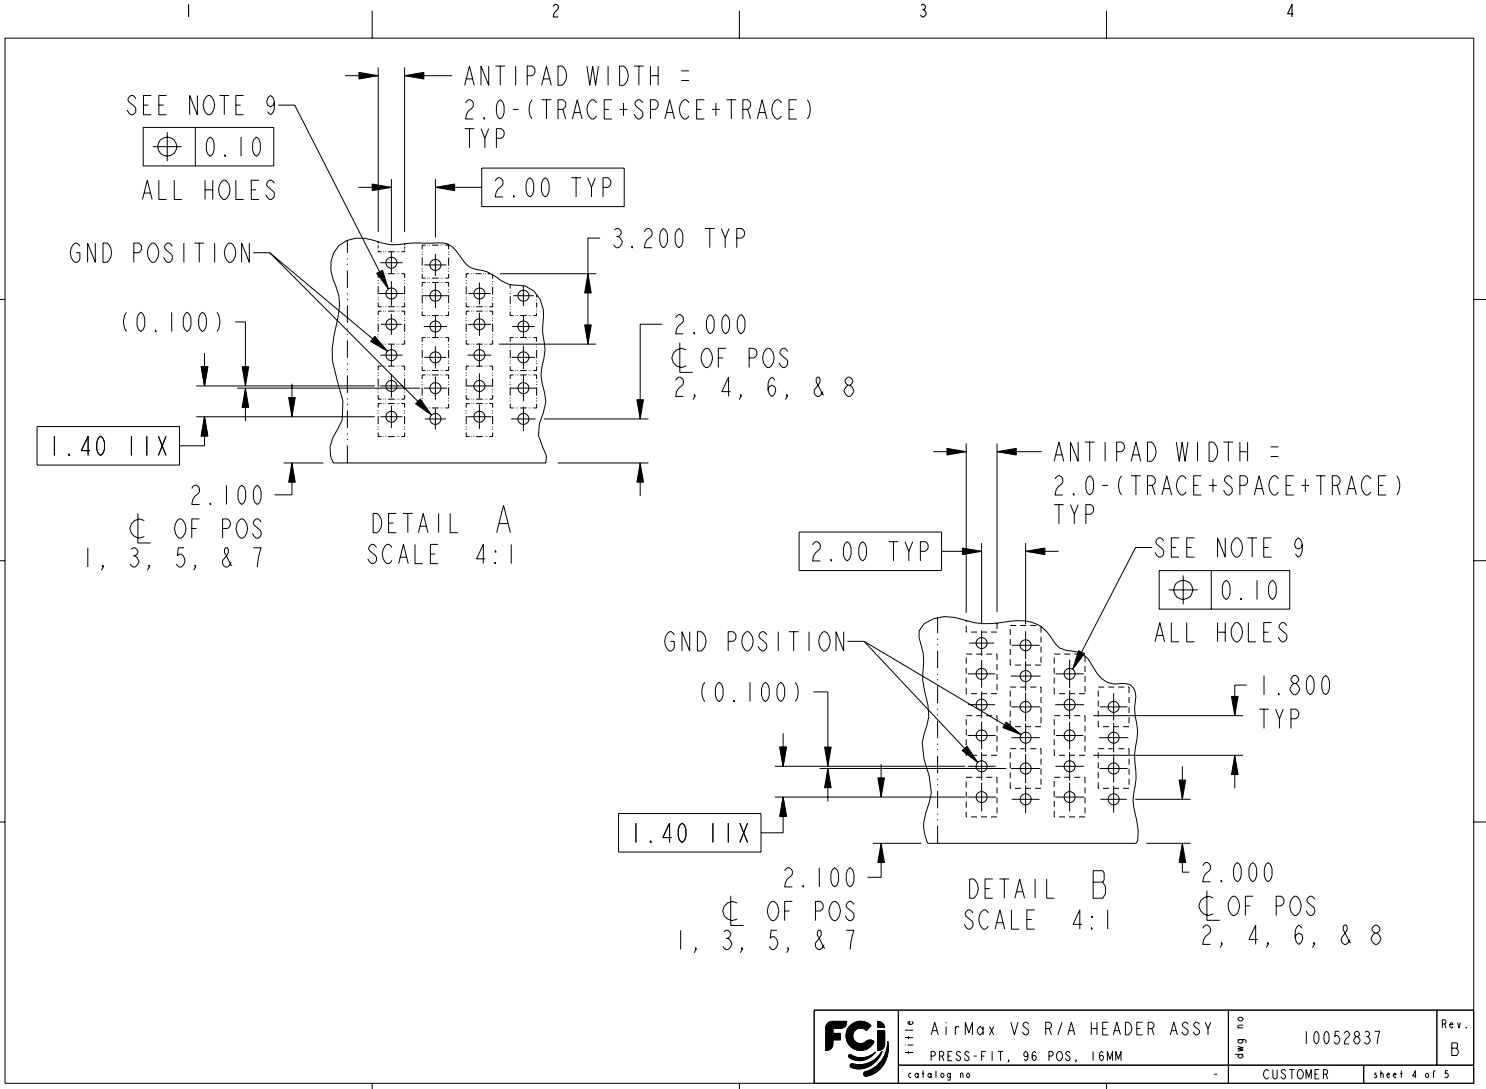


	Part no	AirMax VS R/A HEADER ASSY	Draw no	10052837	Rev.	B
	catalog no	PRESS-FIT, 96 POS, 16MM		CUSTOMER	sheet	4 of 5

PDM: Rev:B STATUS:Released 4 Printed: Dec 01, 2010

PART NUMBER	PRESS-FIT TAIL PLATING TYPE	SHORT DETECT CONTACT
10052837-101	TIN/LEAD ALLOY OVER NICKEL	NO
10052837-101LF	TIN OVER NICKEL (LEAD FREE)	
10052837-111	TIN/LEAD ALLOY OVER NICKEL	YES (SEE NOTE 13)
10052837-111LF	TIN OVER NICKEL (LEAD FREE)	

- NOTES:
1. CONNECTOR MATERIALS:
HOUSING & RETAINER: HIGH TEMP THERMOPLASTIC, NATURAL, UL94V-0
IMLA PLASTIC: HIGH TEMP THERMOPLASTIC, BLACK, UL94V-0
CONTACT: COPPER ALLOY
 2. CONTACT PLATING:
SEPARABLE INTERFACE:
PERFORMANCE-BASED PLATING, QUALIFIED TO MEET THE REQUIREMENTS OF FCI PRODUCT SPECIFICATION GS-12-239, INCLUDING TELCORDIA GR-1217-CORE (NOVEMBER 1995) CENTRAL OFFICE.
PRESS-FIT TAILS: SEE TABLE
 3. PRODUCT SPECIFICATION: GS-12-239
 4. APPLICATION SPECIFICATION: GS-20-035
 5. PRODUCT MARKING, (PART NUMBER & LOT CODE), ON THIS SURFACE
 6. REFER TO CUSTOMER DRAWING 10035911 FOR INFORMATION REGARDING PCB LAYOUT OF POWER AND GUIDE MODULES RELATIVE TO SIGNAL MODULES
 7. POSITIONS F OF ODD NUMBERED COLUMNS AND POSITIONS G OF EVEN NUMBERED COLUMNS CORRESPOND TO EARLY MATE HEADER PINS
 8. THERE IS NO GROUND BUSSING WITHIN THE CONNECTOR SYSTEM
 9. REFER TO CUSTOMER DRAWING 10045979 FOR INFORMATION ON PCB HOLE DIAMETERS AND PLATING OPTIONS.

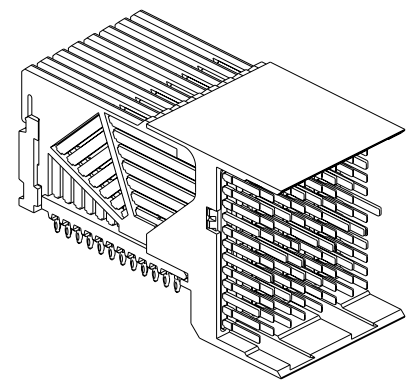

10. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
11. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 40 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
12. PACKAGING MEETS GS-14-920 LEAD FREE LABELING SPECIFICATION.
13. MATING PIN F4 IS SHORTER THAN ALL REMAINING SIGNAL PINS. NOMINAL MATING WIPE FOR PIN F4 IS 0.5MM LESS THAN ALL REMAINING SIGNAL PINS.
14. A $\triangle B$ SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

FCJ	AirMax VS R/A HEADER ASSY	10052837	Rev. B
	PRESS-FIT, 96 POS, 16MM	CUSTOMER	sheet 5 of 5

Copyright FCI.