


SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON OR TPU
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
OUTER JACKET MATERIAL/COLOR	PVC/GRAY
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	4x22 AWG
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K

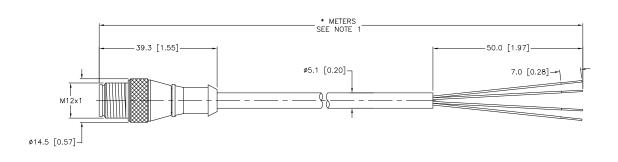

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	+5.0mm

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

D DRAWING PROCESSED AS PART OF ECO 33971

REV DESCRIPTION

2.
3.
4.
MATERIAL
SEE SPECIFICATIONS
FINISH

CBM 04/06/11 33971
BY DATE ECO NO.

2.
3.
4.
MATERIAL
SEE SPECIFICATIONS
FINISH
SEE SPECIFICATIONS
SEE SPECIFICATIONS
SEE SPECIFICATIONS
FOR MORE
INFORMATION

RELATED DOCUMENTS

High Technology Sensors and Automation Controls

DATE 10/09/00| DESCRIPTION

PS 4

SCALE 1=1.0

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-3700 (763) 553-3700 (763) 553-3700 (763) 553-3700 (763) 553-3700 (763) 553-3700 (763) 553-4708

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING FILE: 777000527 SHEET 1 0F 1