


Laboratory DC Power Supply

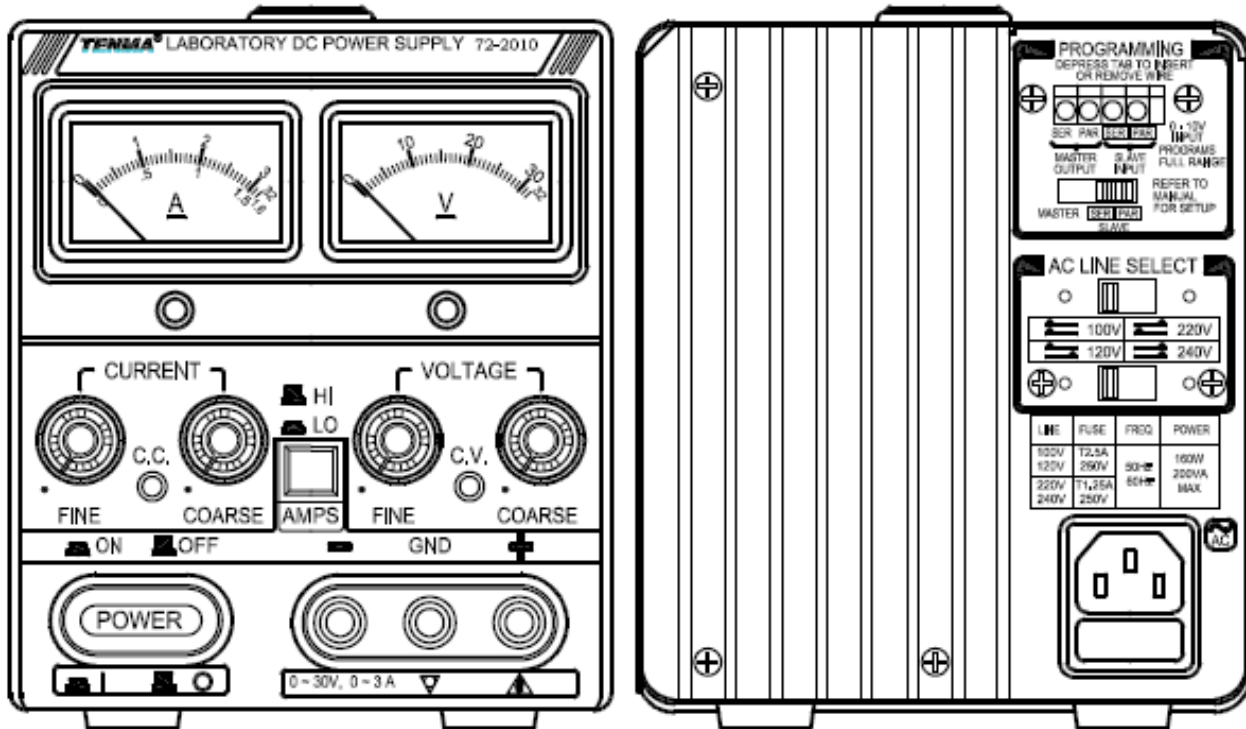

Features:

- Maximum rating 30 V, 3 A.
- Fine and coarse adjustments for accurate voltage and current settings.
- Constant voltage and constant current operations.
- HI / LO current range selector.
- Series or parallel operation.
- Low ripple and noise.
- Overload and reverse polarity protection.
- Power requirements : 100 V, 120 V, 220 V, 240 V ac, 50/60Hz (selectable).
- Includes test leads and owner's manual.
- One year limited warranty.
- Dimensions : 128 (W) × 145 (H) × 285 (D) mm.
- Weight : 5 kg.

⚠ Warning :

Voltages more than 60 V dc are a lethal shock hazard to the user. Be Careful when connecting power supplies in series to achieve voltages higher than 60 V dc total or 60 V dc between any connection and earth ground.

Laboratory DC Power Supply



Specifications :

Constant Voltage Operation:

Output voltage range : 0 to 30 V dc continuously adjustable

Voltage regulation:

Line regulation : $\leq 0.01\% + 3 \text{ mV}$
Load regulation : $\leq 0.01\% + 3 \text{ mV}$ (rating current $\leq 3 \text{ A}$)
Load regulation : $\leq 0.01\% + 5 \text{ mV}$ (rating current $> 3 \text{ A}$)
Recovery time : $\leq 100 \mu\text{s}$ (50% load change, minimum load 0.5 A)
Ripple and noise : $\leq 0.5 \text{ mV rms}$ (5 Hz to 1 MHz) (rating current $\leq 3 \text{ A}$)
: $\leq 1 \text{ mV rms}$ (5 Hz to 1 MHz) (rating current $> 3 \text{ A}$)
Temperature coefficient : $\leq 300 \text{ PPM}/^\circ\text{C}$

Constant Current Operation:

Output current range : 0 to 3 A continuously adjustable
Current regulation : Line regulation : $\leq 0.2\% + 3 \text{ mA}$
Load regulation : $\leq 0.2\% + 3 \text{ mA}$
Ripple and noise : $\leq 3 \text{ mA rms}$

Display:

Analog - 1 each voltmeter and ammeter
Class : 2.5
Size : 50 × 50 mm

Insulation:

Between chassis and output terminal
20 megaohms or above (500 V dc)
Between chassis and AC cord
30 megaohms or above (500 V dc)

Environmental:

Indoor use
Altitude up to 2,000 m
Installation category II
Pollution degree 2
Operating temperature and humidity : 0°C to 40°C , $< 80\%$
Storage temperature and humidity : 10°C to 70°C , $< 70\%$

Part Number Table

Description	Part Number
Laboratory DC Power Supply	72-2010 CALIBRATED

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Tenma is the registered trademark of the Group. © Premier Farnell plc 2011.

www.element14.com
www.farnell.com
www.newark.com
www.cpc.co.uk
www.mcmelectronics.com

