
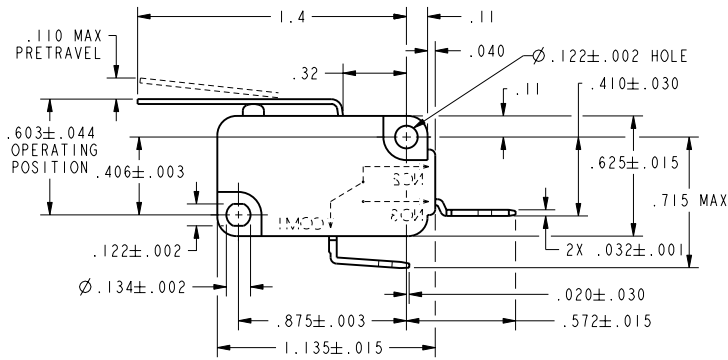


CW-B4776

| REV | DOCUMENT | CHANGED BY | CHECK |
|-----|----------|---------------|-------|
| 2 | 202161 | DCS 19 JAN 01 | SAV |
| 3 | 207382 | TSM 12FEB03 | SAV |

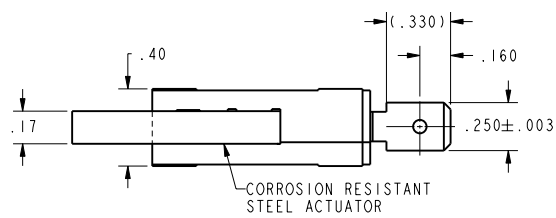

| CHARACTERISTICS | | ELECTRICAL DATA | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: | | DRAWN | DCS | 19 JAN 01 |
|--------------------------|--------------|----------------------------|-------------------------------|--------------------------------------------|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|-----|-----------|
| OPERATING FORCE----- | 80 GRAMS MAX | CONTACT ARRANGEMENT | S P N O | NO PLACE | X ±.040 ±1 | CHECK | SAV | 19 JAN 01 |
| RELEASE FORCE----- | 8 GRAMS MIN | L156 | 11A 1/3HP 125, 250 OR 277 VAC | ONE PLACE | .X ±.030 ±0,4 | THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL. | | |
| DIFFERENTIAL TRAVEL----- | .028 MAX | 172A 125 VDC, 174A 250 VDC | 4A 125 VAC "L" | TWO PLACE | .XX ±.015 ±0,15 | | | |
| OVERTRAVEL----- | .080 MIN | | | THREE PLACE | .XXX ±.005 ± | DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED | | |
| RELEASE TRAVEL----- | .017 MIN | | | ANGLES | ± ± | PTC 2D ASME Y14.5M-1994 | | |
| | | | | RAW MATERIAL-COMMERCIAL STANDARD | ± ± | SCALE 2:1 WEIGHT SHEET 1 OF 1 | | |
| | | | | THIRD ANGLE PROJECTION | | DRAWING NAME V7-1B20E9-022 REV 3 | | |
| | | | | | | TITLE SWITCH - BASIC | | |

Honeywell

SWITCH - BASIC

V7-1B20E9-022

REV 3

