




DL1604

Size: 9V



Lithium Manganese Dioxide Battery

LiMnO₂

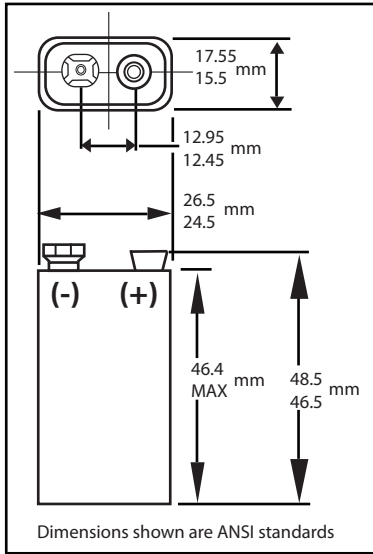

Specifications

| | |
|-----------------------------|--|
| Classification: | Lithium 9V |
| Chemical System: | Lithium Manganese Dioxide |
| Designation: | ANSI-1604LC |
| Nominal Voltage: | 9V |
| Operating Voltage: | 9.6V-4.8V |
| Operating Temp: | -40°C to 60°C (-40°F to 140°F) |
| Storage Temp: | 5°C to 30°C (41°F to 86°F) RH 40%-80% |
| Typical Weight: | 34 g |
| Typical Volume: | 22.8 cubic centimeters (1.4 cubic inch) |
| Typical Impedance: | 775mΩ @ 20kHz |
| Typical IR Content: | 1.35 g (0.048 oz.) |
| Safety Features: | Positive Temperature Coefficient Switch (PTC) Burst proof venting holes |
| Freshness Guarantee: | Up to 10 years at 20°C |
| Transportation: | For complete details, please see reference: Global (except US) Special Provision A45 of the International Air Transport Association Dangerous Goods Regulations |
| United States | 49 CFR 173.185 |

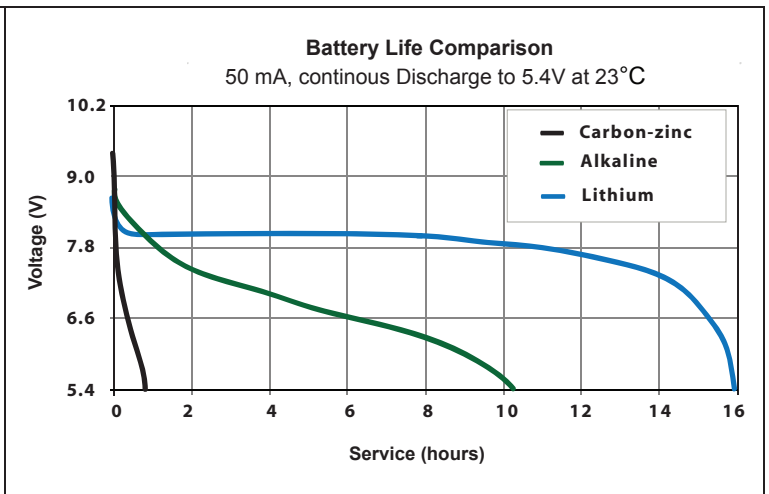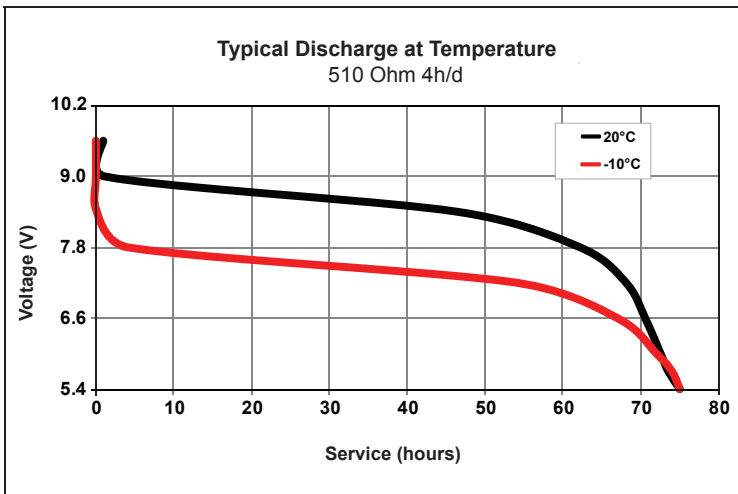

DURACELL®
BATTERIES

Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Telephone: Toll free 1.800.544.5454
Internet: www.duracell.com

***Delivered capacity is dependent on the applied load, intermittent usage, operating temperature and cut off voltage. Please refer to the charts and discharge data for examples of energy/service life that the battery will provide for various conditions.**

Information and contents in this data sheet are for reference purposes only. They do not constitute any warranty and representation is subject to change without notice. For most current information and further details, please contact Duracell.