

MICROSWITCH
a Honeywell Division
FED. MFG. CODE 91929

**SWITCH - TOGGLE
(MAGNETIC HOLD-IN)**

CATALOG LISTING
26ET1-R-G




CATALOG LISTING
26ET1-R-G

ISSUE
M
13

REVISIONS
A 205732
C S L 30 MAY 02

PTC/CAD 20
DRAWN

RELEASE NO. PR-5487-T REPLACES -
PAGE 1 OF 1
CHECK
30 MAY 02
CHECK
30 MAY 02
CHECK

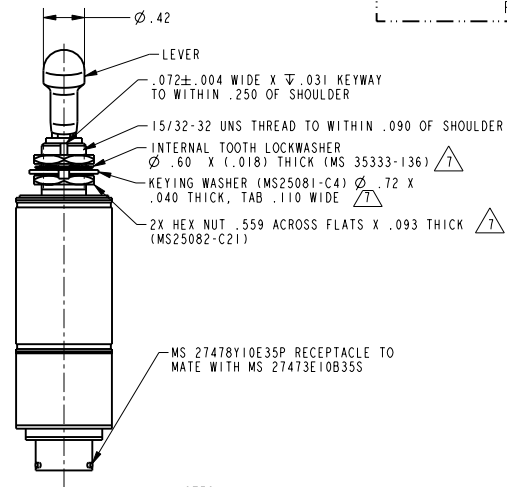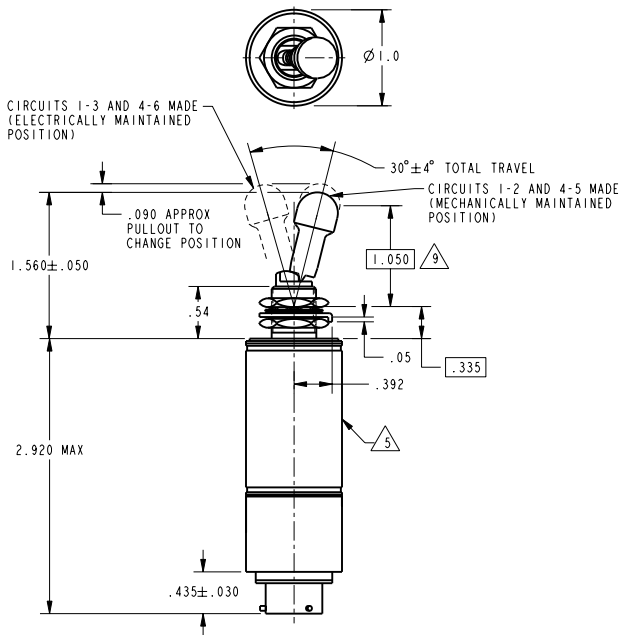


THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CHARACTERISTICS	
SOLENOID RATING AT 20°C	20-30 VDC
STEADY STATE LIMITS	15 VDC
HOLD IN	0.5-15 VDC
DROP OUT	-2.5-10 LBS
OPERATING FORCE AT 30 VDC	7 LBS MAX
COIL RESISTANCE	220 OHM MIN
PULL TO UNLOCK	3-5 LBS

ELECTRICAL DATA	
CONTACT ARRANGEMENT	
2X S.P.D.T	
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RATINGS IN AMPERES	
SEA LEVEL 65,000 FT	
VOLTAGE	
28 VOLTS DC	
INRUSH RES	IND MOTOR
4	2.5
INRUSH RES	IND MOTOR
4	2.0
ANGLES	
+	

THIRD ANGLE PROJECTION	
SCALE FULL	
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RATINGS IN AMPERES	
SEA LEVEL 65,000 FT	
VOLTAGE	
28 VOLTS DC	
INRUSH RES	IND MOTOR
4	2.5
INRUSH RES	IND MOTOR
4	2.0
ANGLES	
+	
WEIGHT	
7.0 OZ MAX	



- NOTES
- EXPOSED PARTS ARE OF CORROSION RESISTANT MATERIAL OR ARE SUITABLY PROTECTED TO PREVENT CORROSION. ENCLOSURE FINISHED WITH BLUE EPOXY BASED ENAMEL COLOR NO. 25184 PER FEDERAL STANDARD 595
 - SWITCH SEALED PER MIL-S-5594
 - HOLD IN VOLTAGE: THE MINIMUM SPECIFIED VOLTAGE AT WHICH THE LEVER WILL REMAIN ACTUATED. HOLD IN MAY OCCUR AT A LOWER VALUE. DROP OUT VOLTAGE: THE VOLTAGE RANGE IN WHICH THE LEVER WILL BE RELEASED
 - CIRCUITS CAN BE TRANSFERRED MANUALLY. ENERGIZING THE COIL WILL NOT CAUSE TRANSFER OF CIRCUITS
 - CIRCUIT IDENTIFICATION IS SHOWN ON SWITCH
 - SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
 - HARDWARE MAY BE FURNISHED UNASSEMBLED PER MIL-S-5594
 - POLARIZING KEY IN LINE WITH KEYWAY WITHIN ±10°
 - FORCE TO BE APPLIED AT THIS POINT IN A DIRECTION PERPENDICULAR TO THE LEVER LONGITUDINAL AXIS

ANSI Y14.5M-1982 APPLIES