

OLED DISPLAY SOLUTIONS

Pictiva™ 3.3-inch 288x48 OLED display



OS288048PQ33MxxC11

Features

- Long-lifetime OLED
- 180° viewing angle
- Fast response, video capable
- High contrast
- Wide operating temperature range
- RoHS compliant

Benefits

- Ease of readability
- No backlight required
- Low power consumption


Applications

- Audio/Video
- Entertainment
- Industrial
- Medical
- Instruments

Specifications

Display Format	288 Columns x 48 Rows				
Diagonal	3.3 inch				
Pixel Pitch	0.285 (W) x 0.285 (H) mm				
Color, Luminance & lifetime	Color	CIE x	CIE y	Cd/m ²	Lifetime hrs, 25°C
	Elegance Yellow	0.46	0.54	100	40K
	Lime Green	0.37	0.62	60	40K
	Golden Orange	0.60	0.40	35	40K
Grayscale	1 bit				
Active Area	82.05 (W) X 13.65 (H) mm				
Module Size	93.00 (W) X 27.18 (H) X 11.20 mm (T) including connection pin length				
Viewing Angle	180°				
Contrast Ratio	2000:1 dark ambient				
Temperature	-30°C to +70°C				
Logic Voltage	2.4V – 3.5V				
Supply Voltage	12V				
Power Cons.	0.05 mW (sleep mode)				
Interface	Serial				
Driver	SSD0332				
Weight	10.5g typical				

Mechanical Dimensions and Pin Description

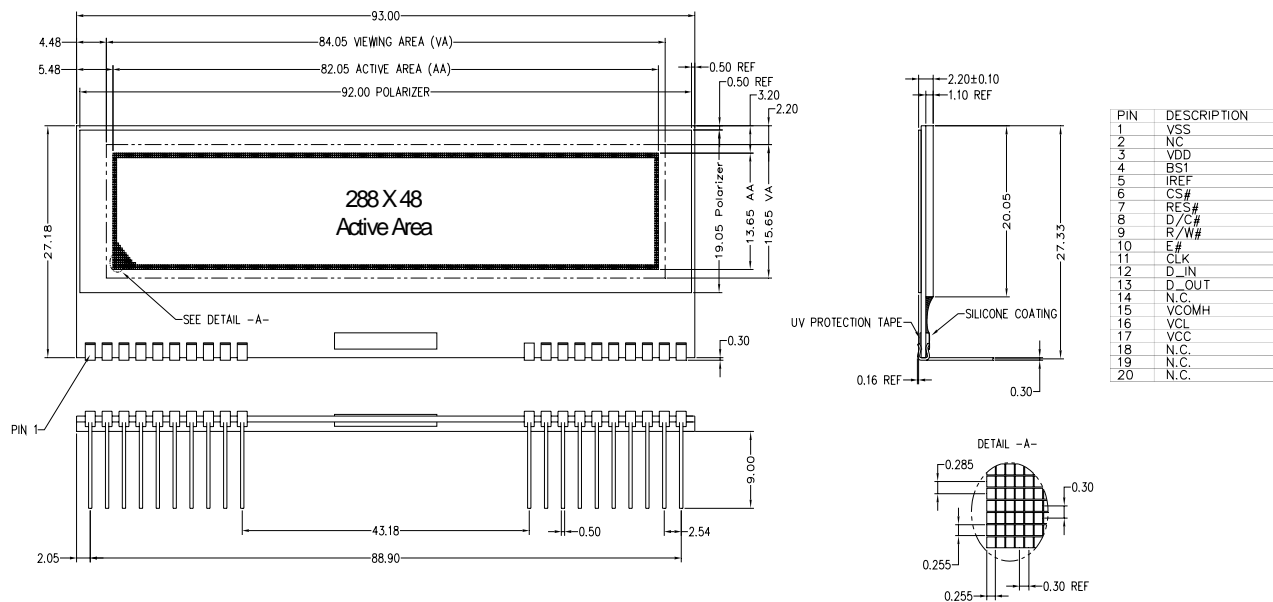

Ordering Information

Part Number	Description
OS288048PQ33MY0C11	Pictiva™ 3.3 inch 288x48 OLED Display, Elegance Yellow
OS288048PQ33MG1C11	Pictiva™ 3.3 inch 288x48 OLED Display, Lime Green
OS288048PQ33MO2C11	Pictiva™ 3.3 inch 288x48 OLED Display, Golden Orange

Contact Information

OSRAM Opto Semiconductors

Asia : +60(0) 4 631-8100 prasia@osram-os.com
 Europe : +49(0) 941-850-3535 pr@osram-os.com
 North America : +1-888-446-7726 ext.4310 info@osram-os.com
 Web : www.pictiva.com

©2005 OSRAM Opto Semiconductors. OSRAM, the OSRAM logo and Pictiva are trademarks and/or service marks of OSRAM Opto Semiconductors, Inc. Other brands are trademarks of their respective holders. OSRAM hold a license from Cambridge Display Technology to manufacture and sell polymer light emitting display. The specifications contained in this document are subjected to change without notice. OSRAM Opto Semiconductors, Inc. assumes no responsibility or liability arising out of the application or use of any legal information, product or service described herein except as expressly agreed to in writing by OSRAM Opto Semiconductors, Inc. Customers are advised to obtain the latest version of the device specification before relying on any published information and before placing orders for products or services. All right reserved
 Lit# 517DS-1 updated on 12/22/05