

600V / 15A 6 in one-package

■ Features

- Compact Single in -line package

■ Applications

- Inverter for Motor drive
- AC and DC Servo drive amplifier
- Uninterruptible power supply
- Industrial machines, such as Welding machines

■ Maximum ratings and characteristics

● Absolute maximum ratings (at Tc=25°C unless otherwise specified)

Item	Symbol	Rating	Unit
Collector-Emitter voltage	V _{CES}	600	V
Gate-Emitter voltage	V _{GES}	±20	V
Collector current	Continuous	I _c	15 A
	1ms	I _c pulse	30 A
		-I _c	15 A
	1ms	-I _c pulse	30 A
Max. power dissipation	P _c	60	W
Operating temperature	T _j	+150	°C
Storage temperature	T _{stg}	-40 to +125	°C
Isolation voltage	V _{is}	AC 2000 (1min.)	V
Screw torque	Mounting *1	1.7	N·m

*1 : Recommendable value : 1.3 to 1.7 N·m (M4)

● Electrical characteristics (at Tj=25°C unless otherwise specified)

Item	Symbol	Characteristics			Conditions	Unit
		Min.	Typ.	Max.		
Zero gate voltage collector current	I _{CEs}	-	-	1.0	V _{GE} =0V, V _{CES} =600V	mA
Gate-Emitter leakage current	I _{GES}	-	-	0.1	V _{CE} =0V, V _{GE} =±20V	µA
Gate-Emitter threshold voltage	V _{GE(th)}	5.5	-	8.5	V _{CE} =20V, I _c =15mA	V
Collector-Emitter saturation voltage	V _{CE(sat)}	-	-	2.8	V _{GE} =15V, I _c =15A	V
Input capacitance	C _{ies}	-	975	-	V _{GE} =0V	pF
Output capacitance	C _{oes}	-	225	-	V _{CE} =10V	
Reverse transfer capacitance	C _{res}	-	54	-	f=1MHz	
Turn-on time	t _{on}	-	-	1.2	V _{CC} =300V	µs
	t _r	-	-	1.0	I _c =15A	
Turn-off time	t _{off}	-	-	1.0	V _{GE} =±15V	
	t _f	-	-	0.35	R _G =150ohm	
Diode forward on voltage	V _F	-	-	3.0	I _F =15A, V _{GE} =0V	V
Reverse recovery time	t _{rr}	-	-	0.3	I _F =15A, -di/dt=45A/µs, V _{GE} =-10V	µs


● Thermal resistance characteristics

Item	Symbol	Characteristics			Conditions	Unit
		Min.	Typ.	Max.		
Thermal resistance	R _{th(j-c)}	-	-	2.08	IGBT	°C/W
	R _{th(j-c)}	-	-	3.0	Diode	°C/W
	R _{th(c-f)*2}	-	0.06	-	the base to cooling fin	°C/W







*2 : This is the value which is defined mounting on the additional cooling fin with thermal compound













■ Equivalent Circuit Schematic

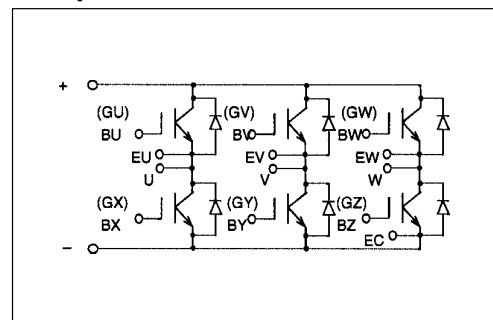

Characteristics (Representative)

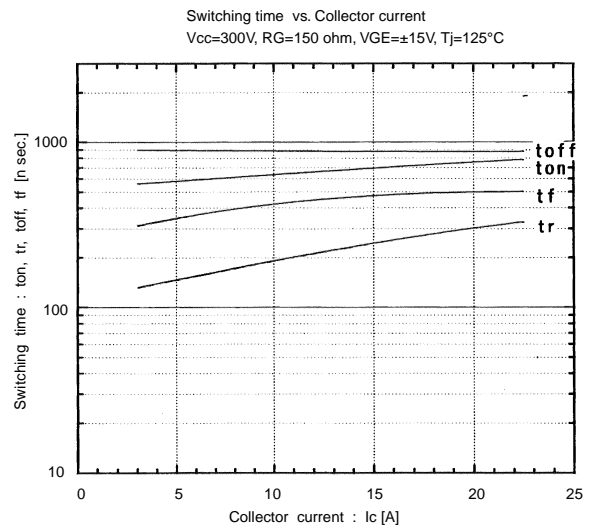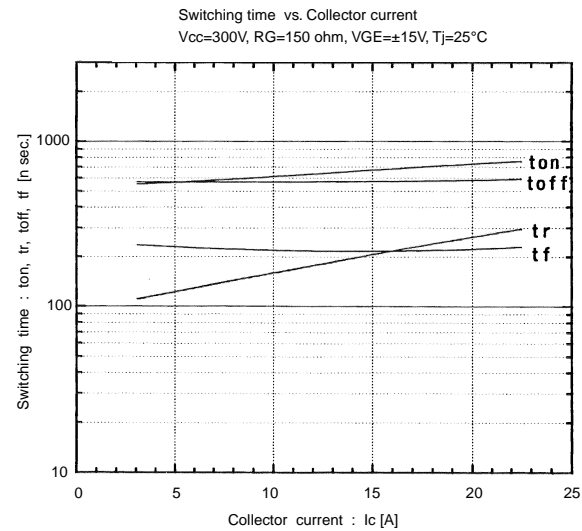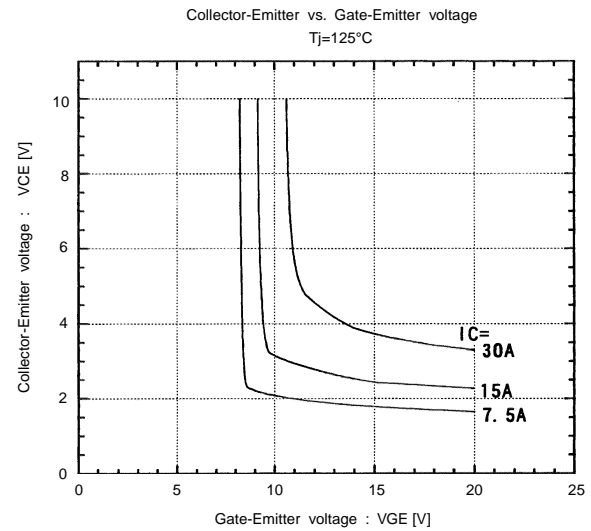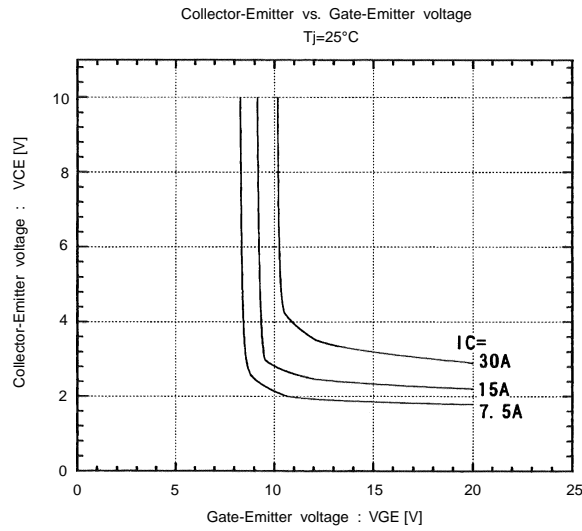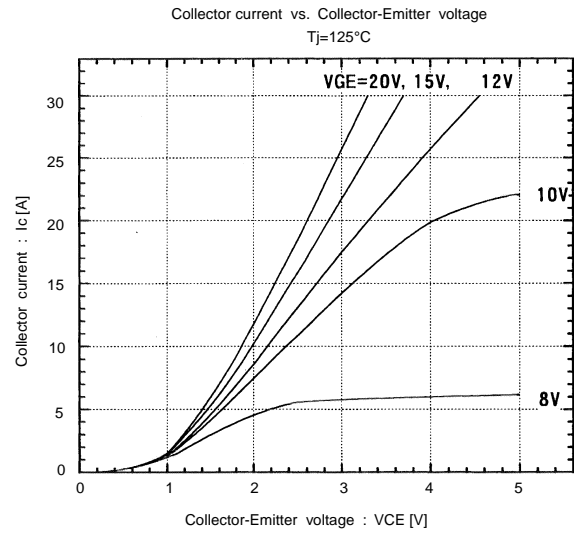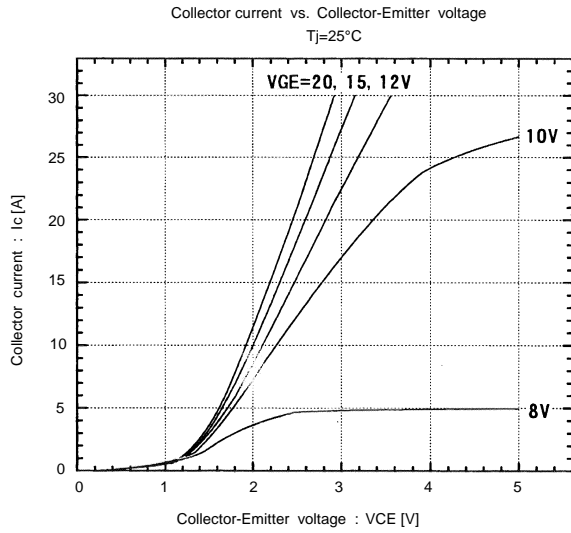

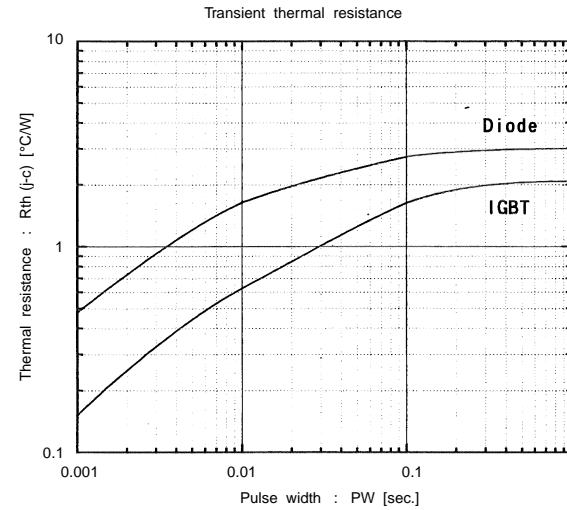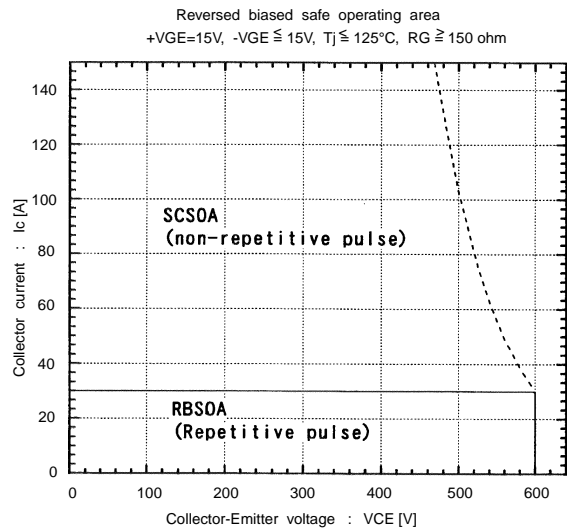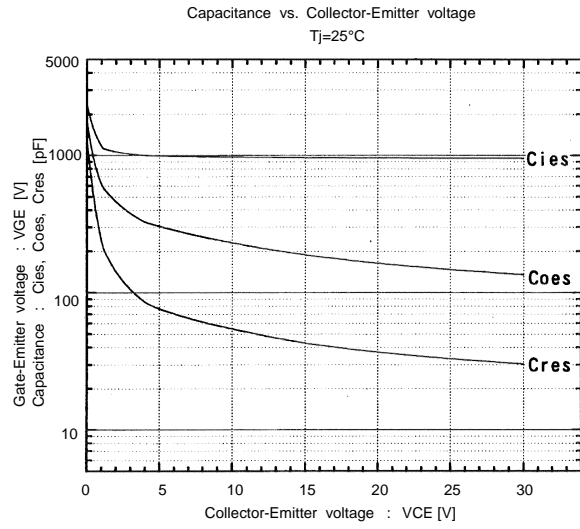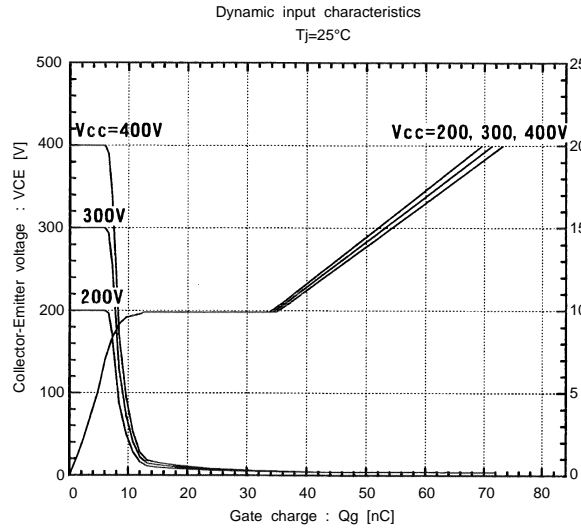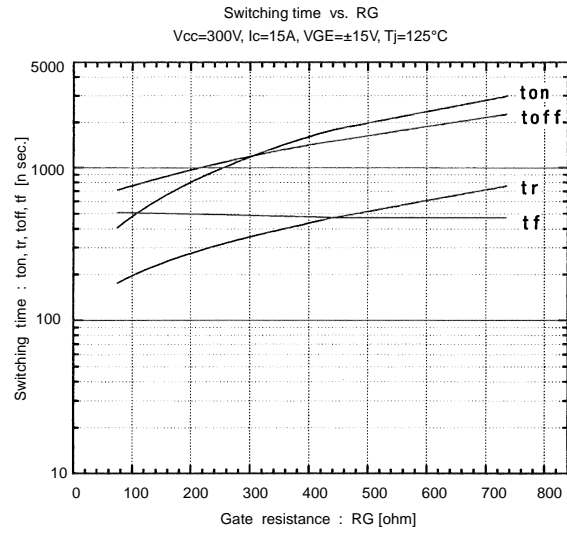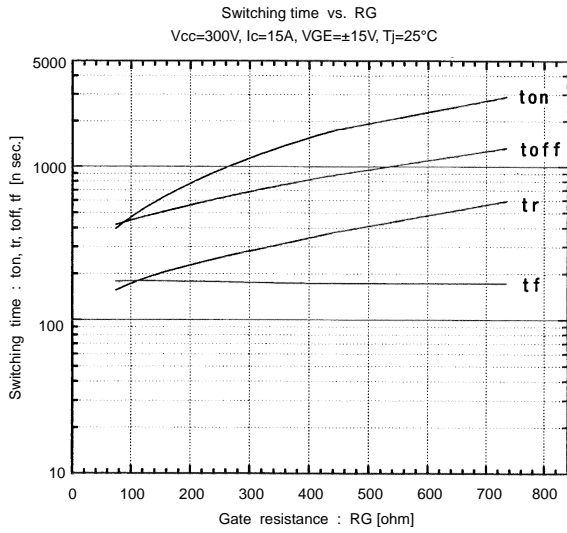

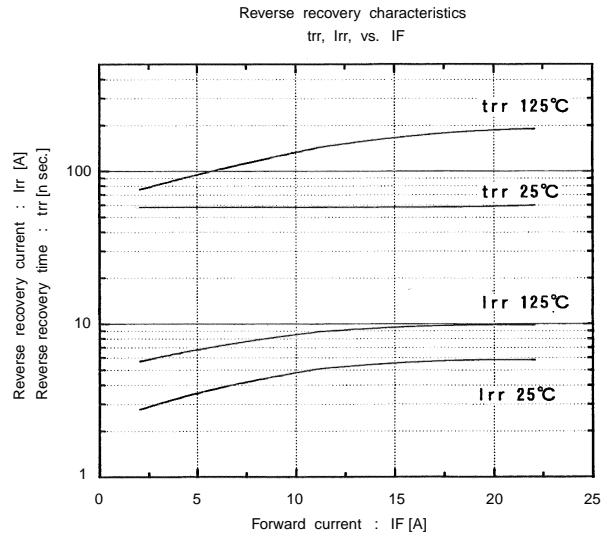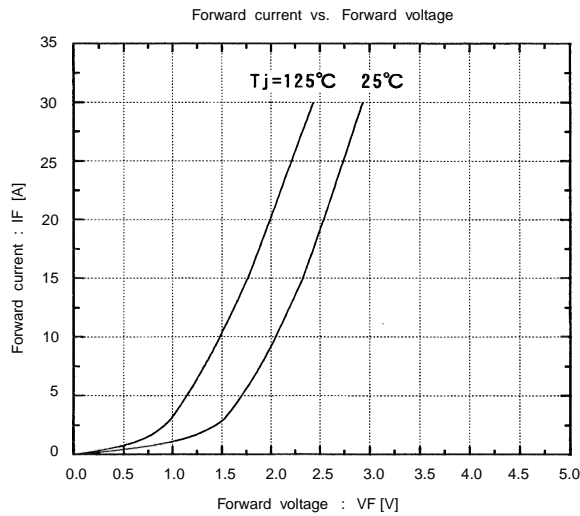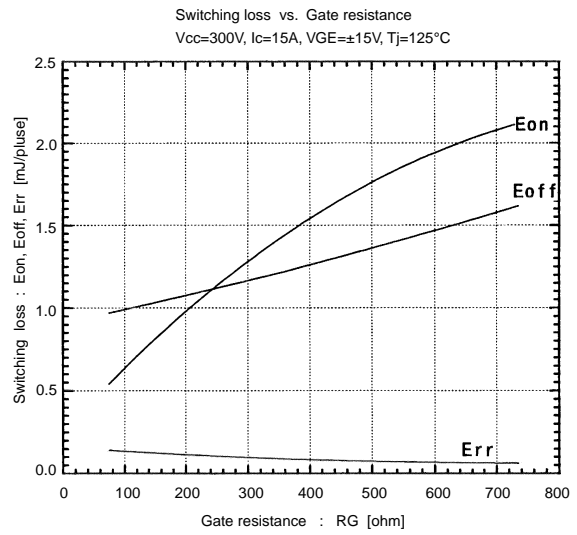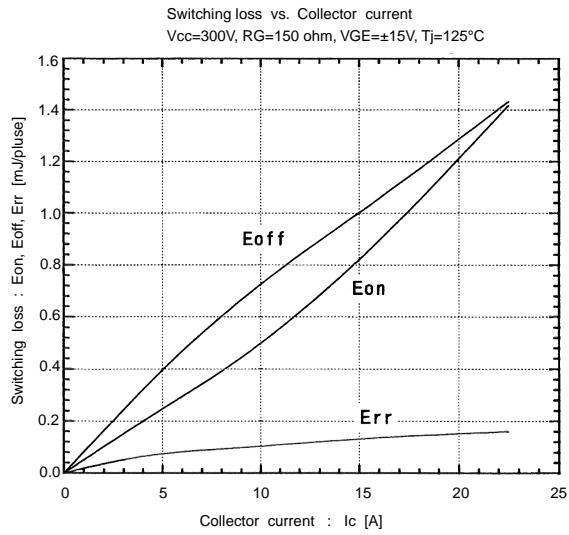

■ Outline Drawings, mm

