



Ratings and characteristics of Fuji IGBT (MBT) Module

2MBI100J-060 (TENTATIVE)

1. Outline Drawing

Unit : mm

* Isolation Voltage : AC 2500 V 1 minute

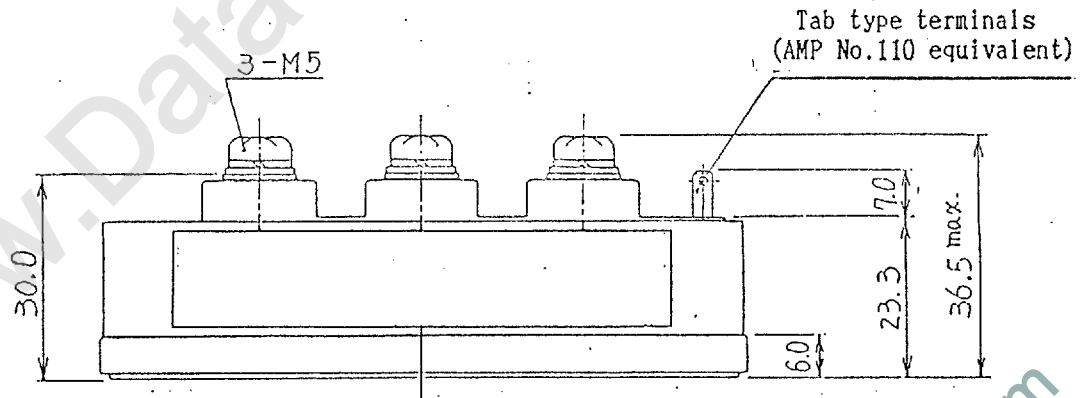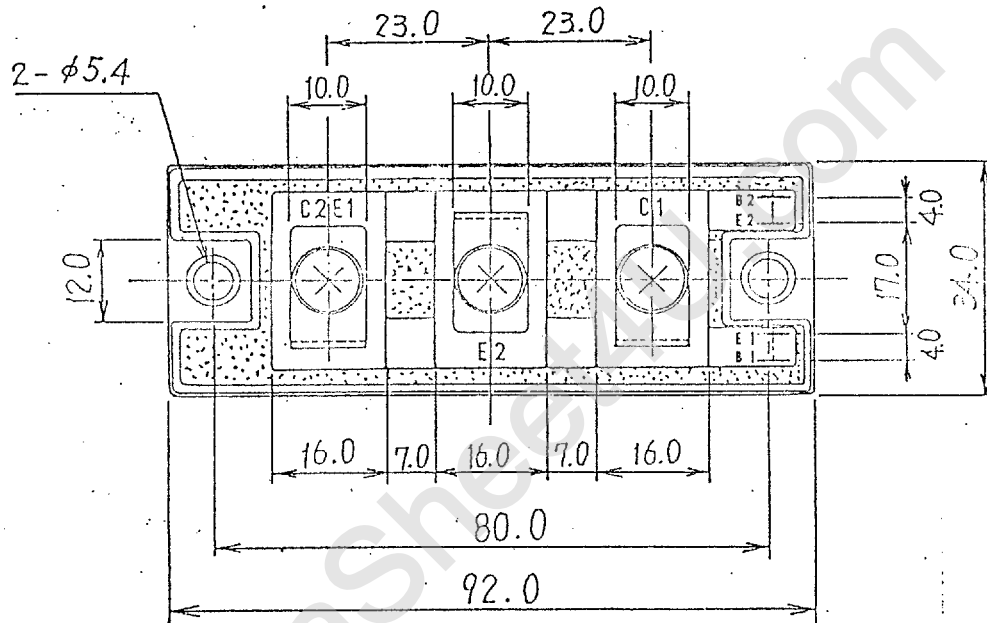

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

10) Revised page 2, 4, 9, 10. Apr. 6 '93 A. Yamaguchi

	DATE	NAME	APPROVED
DRAWN	Jan -25-'93	A. Yamaguchi	
CHECKED	Jan 26 '93	T. Miyasaka	<i>[Signature]</i>

Fuji Electric Co., Ltd.


DWG. NO.

MT5F4906

a

MA4LE

2. Equivalent Circuit

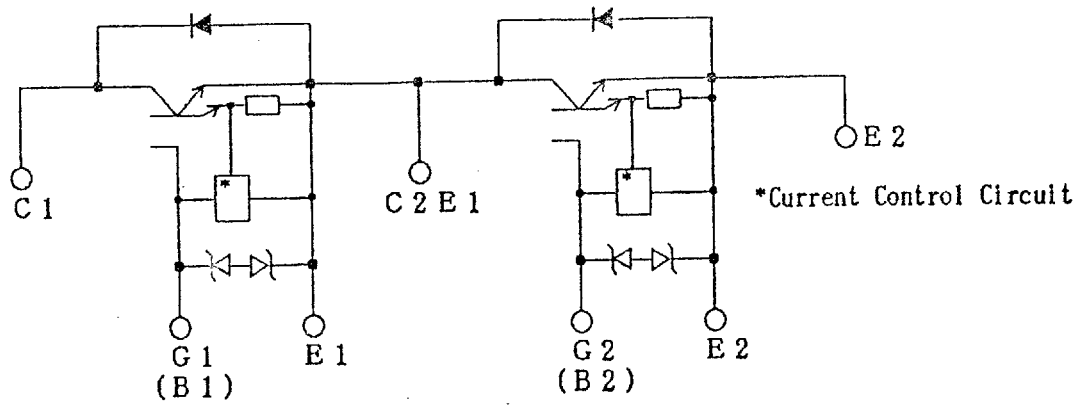

3. Absolute Maximum Ratings (Tj=25 °C)

Items	Symbols	Ratings	Units	
Collector-emitter voltage	V_{CES}	600	V	
Gate-emitter voltage	V_{GES}	± 20	V	
Collector current	Continuous	I_c	100	A
	1 ms	I_c pulse	200	
		$-I_c$	100	
	1 ms	$-I_c$ pulse	200	
Max. power dissipation	PC	300	W	
Operating temperature	Tj	+150	°C	
Storage temperature	Tstg	-40 ~ +125	°C	
Isolation voltage	Vis	AC 2500 (1 min)	V	
Screw Torque	Mounting * 1	3.5	N · m	
	Terminals * 1	3.5		

Note : *1 Recommendable Value : 2.5 ~ 3.5 N · m (M5)

This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co. Ltd.

REVISIONS			
-----------	--	--	--

	DATE	NAME	APPROVED
DRAWN	- -		
CHECKED	- -		

Fuji Electric Co., Ltd.

DWG. NO. **MT5F4906**

2/11

MA4LE

2238792 0002433 TTJ COL

4. Static electrical characteristics (at Tj=25°C unless otherwise specified)

Items	Symbols	Characteristics			Conditions		Units
		min.	typ.	max.			
Zero gate voltage collector current	I _{CEs}			1.0	Tj= 25°C	V _{GE} = 0V	mA
					Tj=125°C	V _{CE} = 600V	mA
Gate-emitter leakage current	I _{GES}			15	V _{CE} = 0V	V _{GE} =± 20V	μA
Gate-emitter threshold voltage	V _{GE(th)}	3.5	5.0	6.5	V _{CE} = 20V	I _C = 100mA	V
Collector-emitter saturation voltage	V _{CE(sat)}		1.7	2.5	V _{GE} = 15V	I _C = 100A	V

5. Dynamic ratings (at Tj=25°C unless otherwise specified)

Items	Symbols	Characteristics			Conditions	Units
		min.	typ.	max.		
Input capacitance	C _{ies}		6400		V _{GE} = 0V	pF
Output capacitance	C _{oes}				V _{CE} = 10V	
Reverse transfer capacitance	C _{res}				f = 1MHz	
Turn-on time	t _{on}		0.6	1.2	V _{CC} =300V I _C = 100A V _{GE} =± 15V R _G = 24Ω	μs
	t _r		0.2	0.6		
Turn-off time	t _{off}		0.8	1.5		
	t _f		0.15	0.35		

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

REVISIONS			
-----------	--	--	--

DATE	NAME	APPROVED	Fuji Electric Co., Ltd.	
DRAWN	- -		DWG. NO.	MT5F4906
CHECKED	- -			

MA4LE

6. Characteristics of reverse diode (at $T_j=25^\circ\text{C}$ unless otherwise specified)

Items	Symbols	Characteristics			Conditions	Units
		min.	typ.	max.		
Diode forward on-voltage	V _F		2.3	3.0	I _F = 100A V _{CE} = 0V	V
Reverse recovery time	t _{rr}			300	I _F = 100A -di/dt = 300A/μs	ns

7. Thermal resistance characteristics

Items	Symbols	Characteristics			Conditions	Units
		min.	typ.	max.		
Thermal resistance	R _{th(j-c)}			0.417	IGBT	°C/W
	R _{th(j-c)}			0.800	Diode	
	* R _{th(c-f)}		0.05		the base to cooling fin	

* This is the value which is defined mounting on the additional cooling fin with thermal compound.

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

REVISIONS			
-----------	--	--	--

	DATE	NAME	APPROVED	Fuji Electric Co., Ltd.	
DRAWN	- -				
CHECKED	- -			DWG. NO.	MT5F4906

MA4LE