

3A Avg.

20 Volts


SBD

EC30LB02

■最大定格 Maximum Ratings

Item	Symbol	Conditions	Unit
くり返しピーク逆電圧 Repetitive Peak Reverse Voltage	V_{RRM}	20	V
直 流 順 電 流 Direct Forward Current	I_{DC}	Ta=102°C* Th:Lead Temperature	3.0 A
		Ta=28°C*	2.8 A
サージ順電流 Surge Forward Current	I_{FSM}	80 50Hz正弦半波, 1サイクル, 非くり返し 50Hz Half Sine Wave, 1cycle, Non-repetitive	A
動作接合温度範囲 Operating Junction Temperature Range	T_{jw}	-40~+125	°C
保存温度範囲 Storage Temperature Range	T_{stg}	-40~+125	°C

■OUTLINE DRAWING(mm)

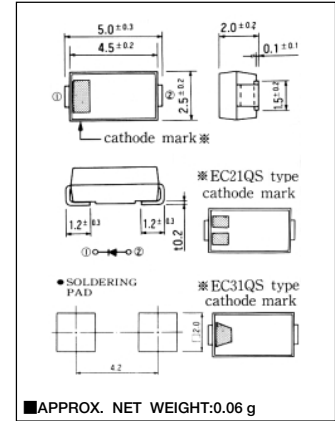

■電氣的・熱的特性 Electrical/Thermal Characteristics

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
ピーク逆電流 Peak Reverse Current	I_{RM}	$T_j=25^\circ\text{C}$, $V_{RM}=V_{RRM}$	—	—	1	mA
ピーク順電圧 Peak Forward Voltage	V_{FM}	$T_j=25^\circ\text{C}$, $I_{FM}=3.0\text{A}$	—	—	0.41	V
熱 抵 抗 Thermal Resistance	$R_{th(j-a)}$	接合部・周囲間 Junction to Ambient	—	—	108	°C/W
	$R_{th(j-l)}$	接合部・リード間 Junction to Lead	—	—	23	°C/W

*プリント基板実装/Alumina Substrate Mounted (Soldering Land=2×2mm,Both Sides)

■定格・特性曲線

