


TwinSLIC™ Protector



This *TwinSLIC* DO-214AA unidirectional protector is constructed with a *SIDACTor*® device and an integrated diode. It protects SLICs (Subscriber Line Interface Circuits) from damage during transient voltage activity and enables line cards to comply with various regulatory requirements including GR 1089, ITU K.20, K.21 and K.45, IEC 60950, UL 60950, and TIA-968-A (formerly known as FCC Part 68).

For details of specific design criteria, see Figure 6.40 through Figure 6.43 in Section 6, "Reference Designs" of this *Telecom Design Guide*.

Electrical Parameters

Part Number *	V _{DRM} Volts	V _S Volts	V _T Volts	V _F Volts	I _{DRM} μAmps	I _S mAmps	I _T Amps	I _H mAmps
	Pins 1-2, 3-2							
P0641CA2L	58	77	4	5	5	800	1	120
P0721CA2L	65	88	4	5	5	800	1	120
P0901CA2L	75	98	4	5	5	800	1	120
P1101CA2L	95	130	4	5	5	800	1	120
P1301CA2L	120	160	4	5	5	800	1	120
P1701CA2L	160	200	4	5	5	800	1	120

* "L" in part number indicates RoHS compliance. For non-RoHS compliant device, delete "L" from part number.
For surge ratings, see table below.

General Notes:

- All measurements are made at an ambient temperature of 25 °C. I_{PP} applies to -40 °C through +85 °C temperature range.
- I_{PP} is a repetitive surge rating and is guaranteed for the life of the product.
- V_{DRM} is measured at I_{DRM}.
- V_S and V_F are measured at 100 V/μs.
- Special voltage (V_S and V_{DRM}) and holding current (I_H) requirements are available upon request.
- Parallel capacitive loads may affect electrical parameters.
- Compliance with GR 1089 or UL 60950 power fault tests may require special design considerations. Contact the factory for further information.

Surge Ratings in Amps

Series	I _{PP}									I _{TSM} 50 / 60 Hz	di/dt
	0.2x310 *	2x10 *	8x20 *	10x160 *	10x560 *	5x320 *	10x360 *	10x1000 *	5x310 *		
	Amps	Amps	Amps	Amps	Amps	Amps	Amps	Amps	Amps		
A	20	150	150	90	50	75	75	45	75	20	500

* Current waveform in μs

** Voltage waveform in μs

Thermal Considerations

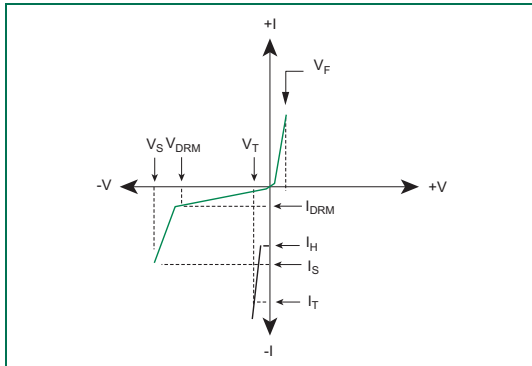
Package	Symbol	Parameter	Value	Unit
Modified DO-214AA 	T_J	Operating Junction Temperature Range	-40 to +150	°C
	T_S	Storage Temperature Range	-65 to +150	°C
	$R_{\theta JA}$	Thermal Resistance: Junction to Ambient	85	°C/W

Capacitance Values

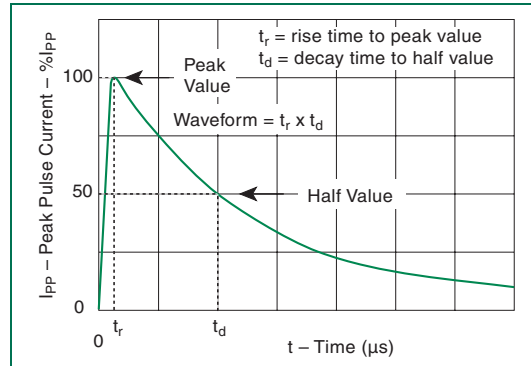
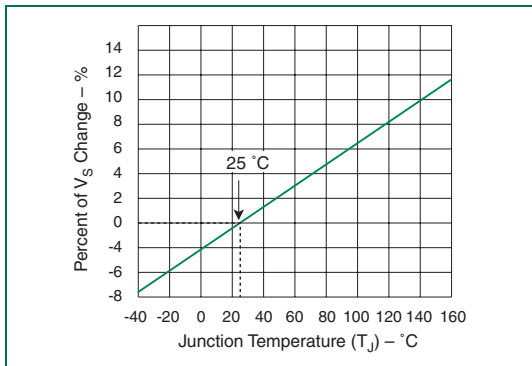
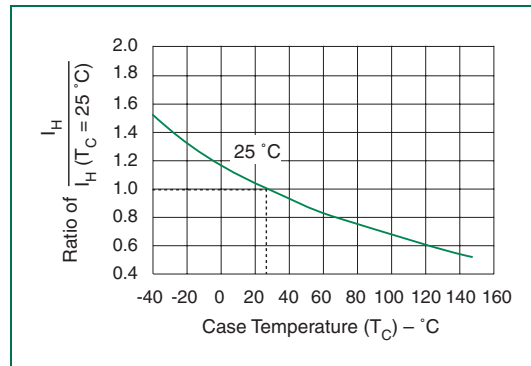
Part Number	pF Pin 1-2 / 3-2 Tip-Ground, Ring-Ground		pF Pin 1-3 Tip-Ring	
	MIN	MAX	MIN	MAX
P0641CA2L	40	200	20	105
P0721CA2L	35	190	20	105
P0901CA2L	30	180	20	105
P1101CA2L	25	160	15	105
P1301CA2L	25	125	15	105
P1701CA2L	25	125	15	105

 Note: Off-state capacitance (C_O) is measured at 1 MHz with a 2 V bias.

SIDAcTOR Devices



V-I Characteristics


 $t_r \times t_d$ Pulse Waveform

 Normalized V_S Change versus Junction Temperature


Normalized DC Holding Current versus Case Temperature