


# Ultra Fast Recovery Rectifiers UF130 — UF150

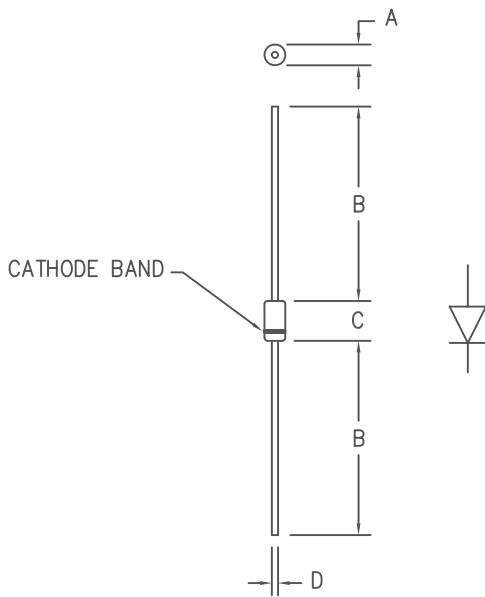

| Dim. | Inches  |         | Millimeter |         | Notes |
|------|---------|---------|------------|---------|-------|
|      | Minimum | Maximum | Minimum    | Maximum |       |
| A    | .081    | .107    | 2.057      | 2.718   | Dia.  |
| B    | 1.10    | ----    | 27.94      | ----    |       |
| C    | .160    | .205    | 4.064      | 5.207   |       |
| D    | .028    | .034    | .711       | .864    | Dia.  |

PLASTIC D041

| Microsemi Catalog Number | Industry Part Number | Working Peak Reverse Voltage | Repetitive Peak Reverse Voltage |
|--------------------------|----------------------|------------------------------|---------------------------------|
| UF130                    | VHE230               | 300V                         | 300V                            |
| UF140                    | UF4004               | 400V                         | 400V                            |
|                          | UF4004GP             |                              |                                 |
|                          | VHE240               |                              |                                 |
| UF150                    | VHE250               | 500V                         | 500V                            |

- Ultra Fast Recovery
- 175°C Junction Temperature
- VRRM 300 to 500 Volts
- 1 Amp Current Rating
- $t_{RR}$  50nS Max.

## Electrical Characteristics

|                              |                     |  |
|------------------------------|---------------------|--|
| Average forward current      | $I_F(AV)$ 1.0 Amps  | $T_L = 125^\circ C$ , Square wave, $R_{\theta JL} = 25^\circ C/W$ , $L = 1/4"$ |
| Maximum surge current        | $I_{FSM}$ 30 Amps   | 8.3ms, half sine, $T_J = 175^\circ C$  |
| Max peak forward voltage     | $V_{FM}$ .80 Volts  | $I_{FM} = 0.1A; T_J = 25^\circ C^*$  |
| Max peak forward voltage     | $V_{FM}$ 1.1 Volts  | $I_{FM} = 1.0A; T_J = 25^\circ C^*$  |
| Max reverse recovery time    | $t_{RR}$ 50 nS      | 1/2A, 1A, 1/4A, $T_J = 25^\circ C$   |
| Max peak reverse current     | $I_{RM}$ 10 $\mu A$ | $V_{RRM}, T_J = 25^\circ C$  |
| Typical junction capacitance | $C_J$ 2.5 pF        | $V_R = 10V, T_J = 25^\circ C$  |

\*Pulse width = 300 usec. Duty cycle = 2%

## Thermal and Mechanical

|                               |                            |                                  |
|-------------------------------|----------------------------|----------------------------------|
| Storage temperature range     | $T_{STG}$                  | -55°C to 175°C                   |
| Operating junction temp range | $T_J$                      | -55°C to 175°C                   |
| Maximum thermal resistance    | $L = 1/4"$ $R_{\theta JL}$ | 25°C/W Junction to Lead          |
| Weight                        |                            | .011 ounces (0.34 grams) typical |



8700 East Thomas Road, P.O. Box 1390  
Scottsdale, AZ 85252  
PH: (480) 941-6300  
FAX: (480) 947-1503  
www.microsemi.com

05-04-07 Rev. 4

# UF130 — UF150

Figure 1  
Typical Forward Characteristics

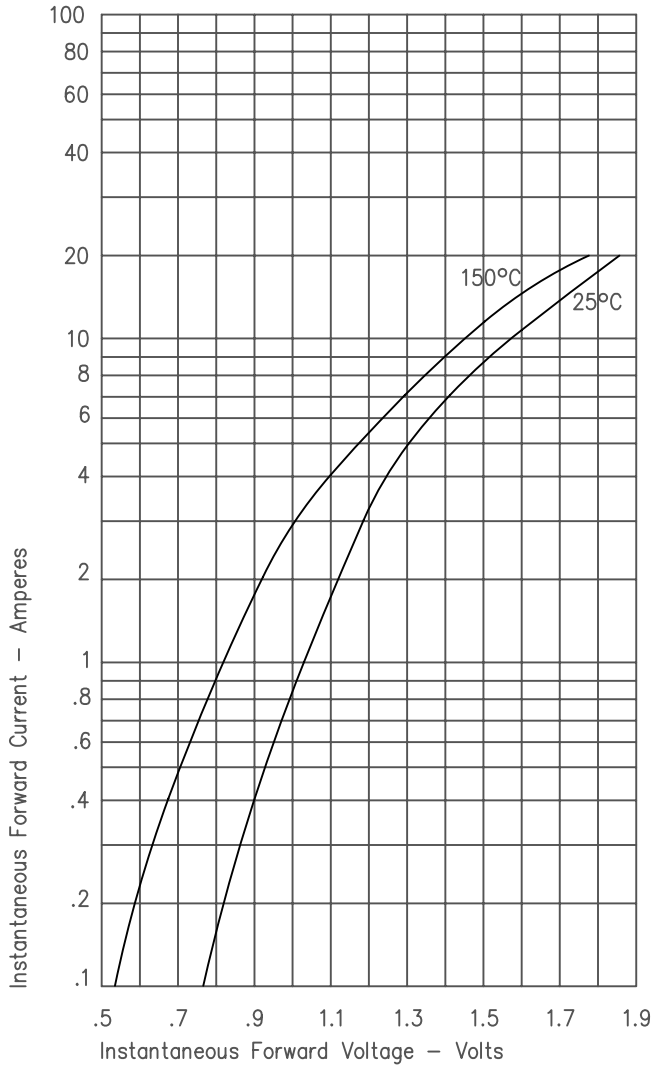


Figure 3  
Typical Junction Capacitance

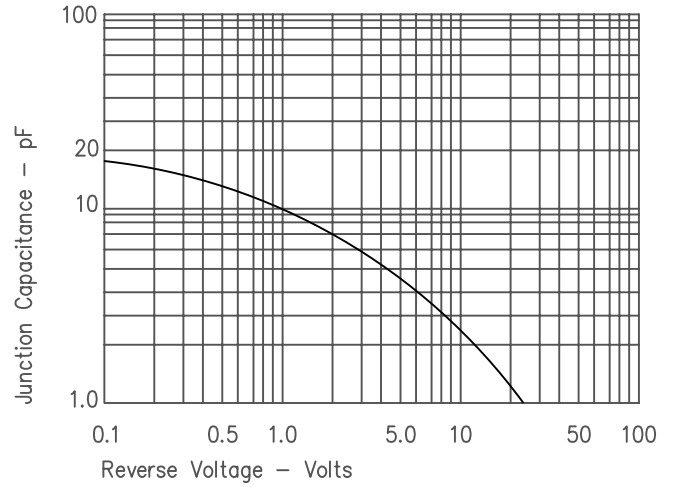


Figure 2  
Typical Reverse Characteristics

