

# SHINDENGEN


## General Purpose Rectifiers

## Square In-line Package

# S25VB60

## 600V 25A

### OUTLINE DIMENSIONS

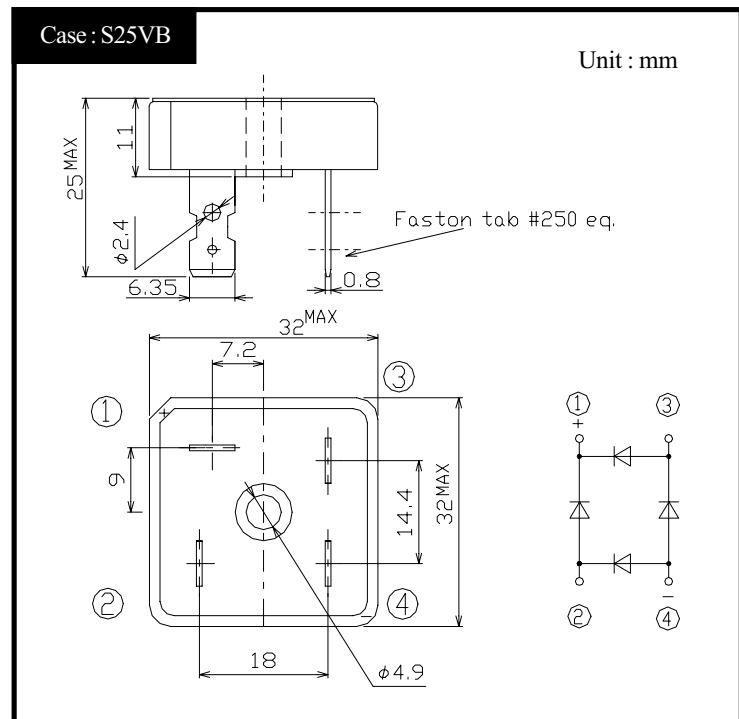

### RATINGS

#### ● Absolute Maximum Ratings


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T <sub>stg</sub>		-40~150	°C
Operating Junction Temperature	T <sub>j</sub>		150	°C
Maximum Reverse Voltage	V <sub>RM</sub>		600	V
Average Rectified Forward Current	I <sub>O</sub>	50Hz sine wave, R-load With heatsink, T <sub>c</sub> =85°C	25	A
		50Hz sine wave, R-load Without heatsink, T <sub>a</sub> =40°C	6	
Peak Surge Forward Current	I <sub>FSM</sub>	50Hz sine wave, Non-repetitive 1cycle peak value, T <sub>j</sub> =25°C	400	A
Current Squared Time	I <sup>2</sup> t	1ms ≤ t < 10ms T <sub>j</sub> =25°C	800	A <sup>2</sup> s
Dielectric Strength	V <sub>dis</sub>	Terminals to case, AC 1 minute	2	kV
Mounting Torque	TOR	(Recommended torque : 1N·m)	2	N·m

#### ● Electrical Characteristics (T<sub>c</sub>=25°C)


Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =12.5A, Pulse measurement, Rating of per diode	Max.1.05	V
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =V <sub>RM</sub> , Pulse measurement, Rating of per diode	Max.10	μA
Thermal Resistance	θ <sub>jc</sub>	junction to case	Max.1.5	°C/W

S25VBx

Forward Voltage

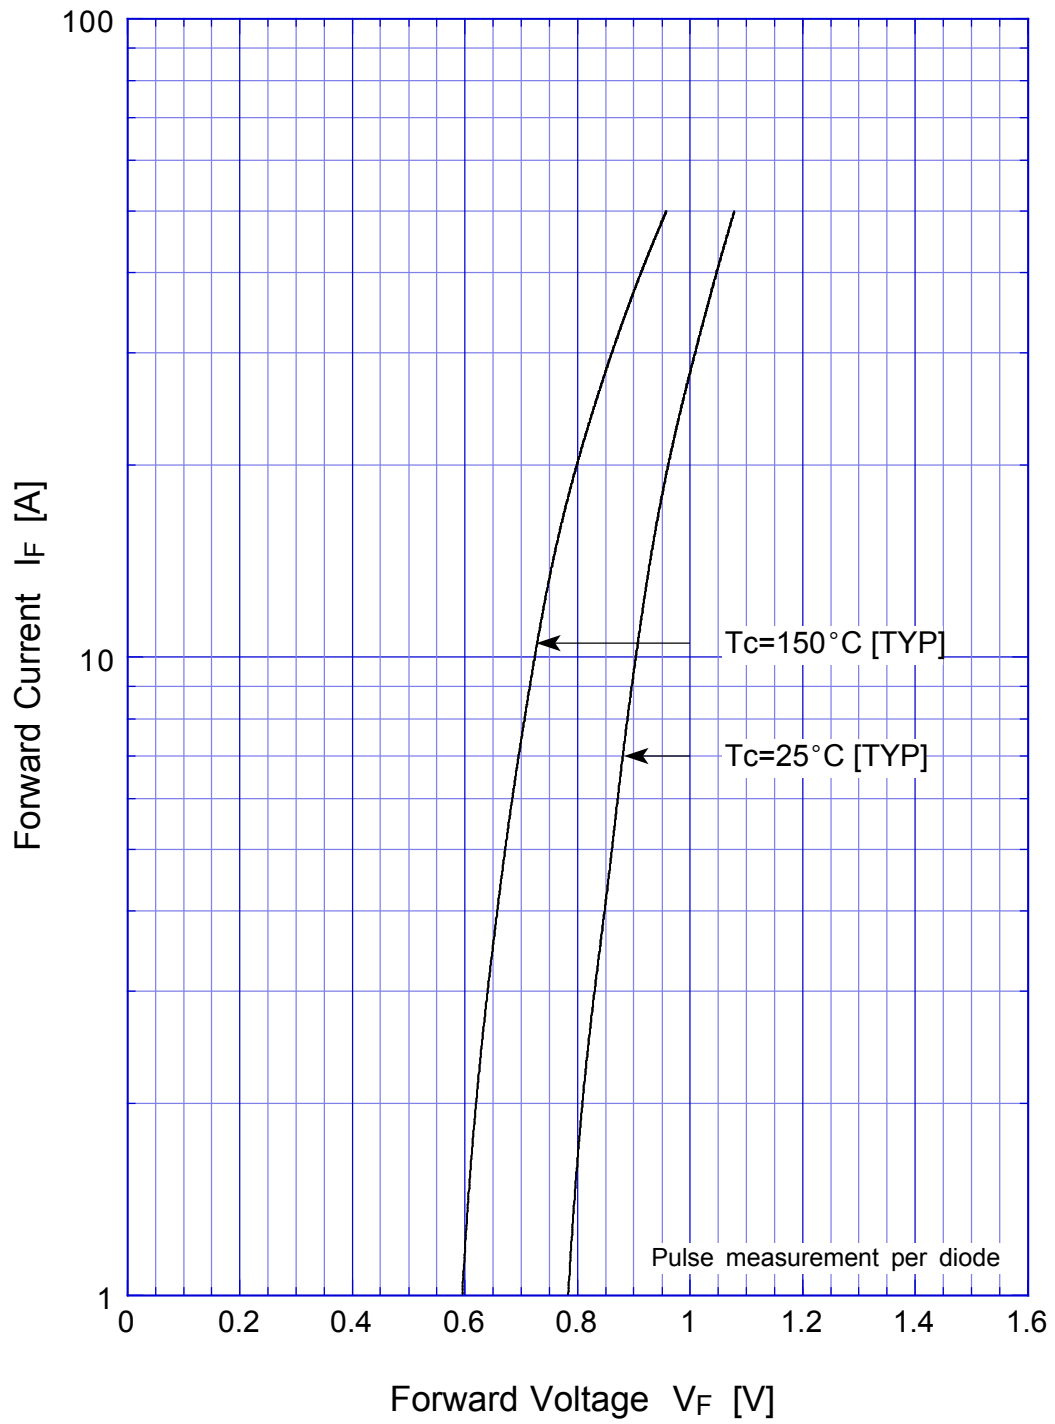


## S25VBx Forward Power Dissipation

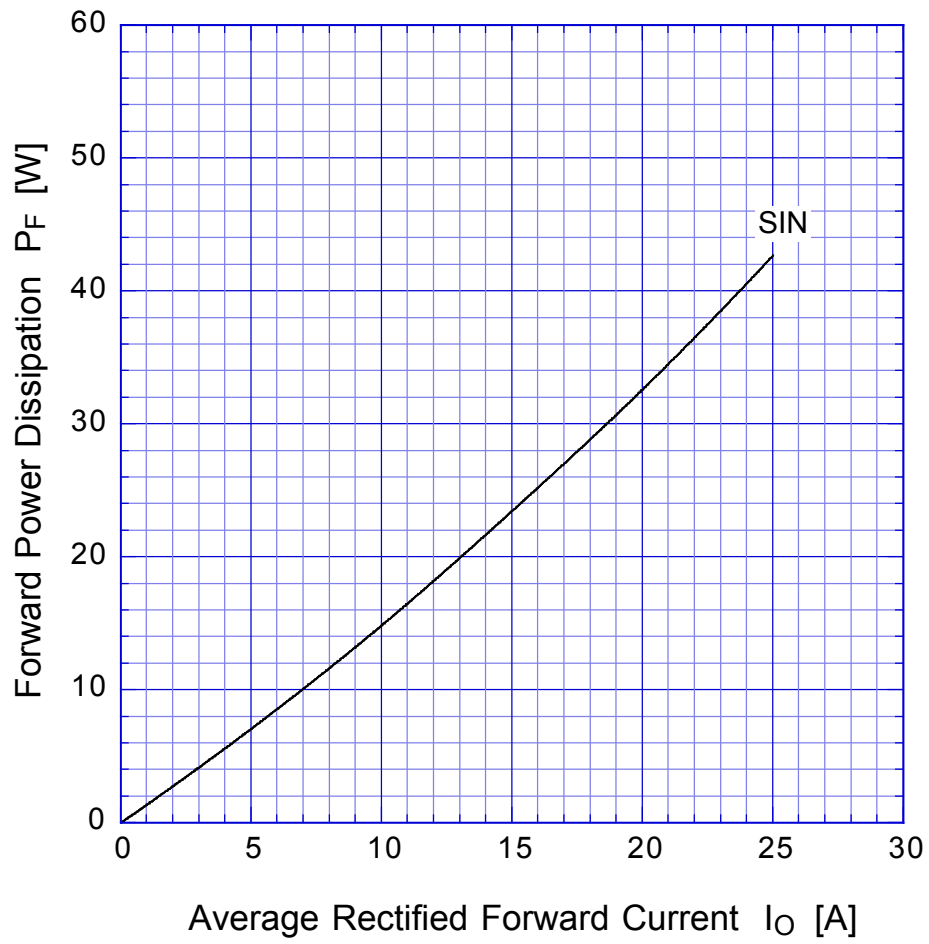

$T_j = 150^\circ\text{C}$   
Sine wave

# S25VBx

# Derating Curve

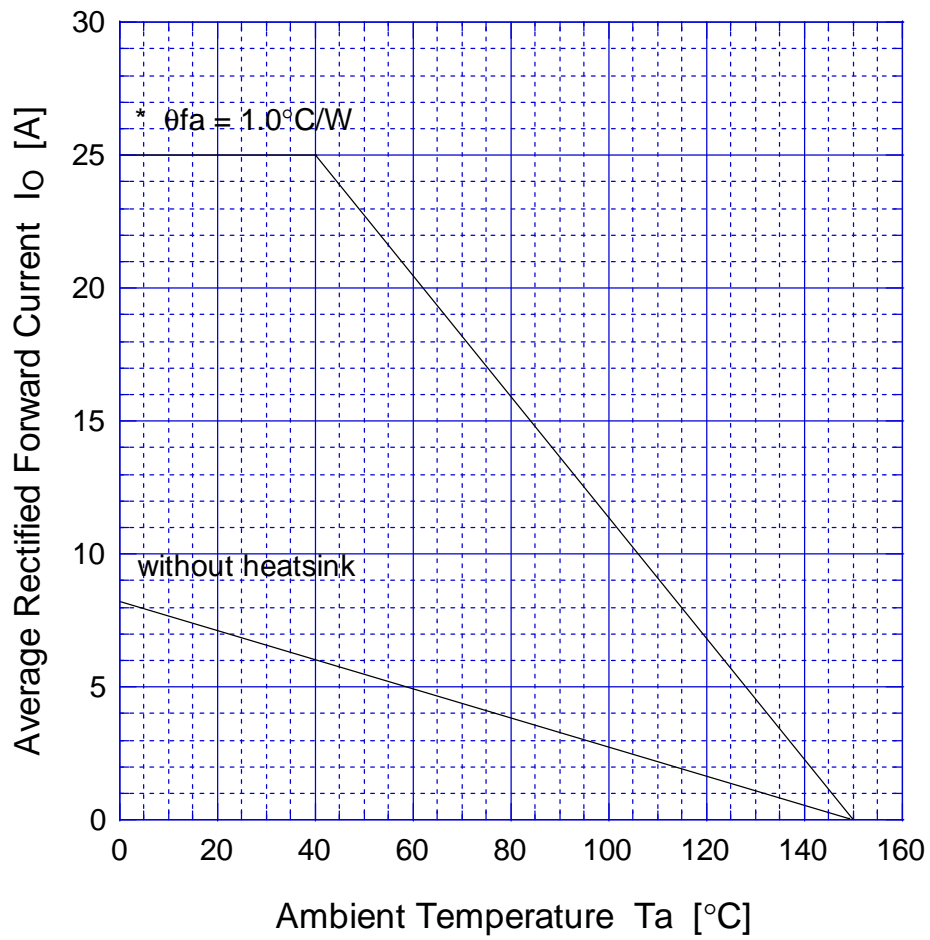

Sine wave

R-load

Free in air

\* with thermal compound, TOR=1N-m

# S25VBx

## Peak Surge Forward Capability

