



LA7784

Monolithic Linear IC
Downconverter IC
for Digital CATV

Overview

The LA7784 is a downconverter IC for digital CATV. It accepts RF input frequencies from 50 to 150MHz and supports the DOCSIS (USA) and Euro-DOCSIS (Europe) standards.

Features

- RF Mixer.
- Attenuation control for RF Mixer.
- Driver for SAW filter.
- IF AGC amplifier.
- IF Driver amplifier for ADC.

Specifications

Maximum Ratings at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V _{CC} max	Pin 8, 14, 19, 20, 21, 22, 26, 27	6.0	V
Circuit voltages	V max	Pin 9	V _{CC}	V
Circuit current	I _{12, 13}	Pin 12, 13 sink current	2	V
Allowable power dissipation	Pd max	Ta ≤ 70°C	900*	mW
Operating temperature range	Topr		-20 to +70	mW
Storage temperature range	Tstg		-55 to +150	°C

* On the board (114.3×76.1×1.6mm)

Operating Conditions at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Recommended supply voltage	V _{CC}	Pin 8, 14, 19, 20, 21, 22, 26, 27	5.0	V
Operating supply voltage range	V _{CC} op	Pin 8, 14, 19, 20, 21, 22, 26, 27	4.5 to 5.5	V

■ Any and all SANYO Semiconductor products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO Semiconductor representative nearest you before using any SANYO Semiconductor products described or contained herein in such applications.

■ SANYO Semiconductor assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO Semiconductor products described or contained herein.

LA7784


AC Characteristics at $T_a = 25^\circ\text{C}$, $V_{CC} = 3.3\text{V}$

Parameter	Symbol	Pin No.	Conditions	Ratings			Unit
				min	typ	max	
Circuit current	I_{total}	8, 14, 19, 20, 21, 22, 26, 27	No Signal	80	105	130	mA
RF input frequency range	$f_{(\text{RF})}$	23, 24	fc: -3dB	50		150	MHz
RF AGC range	GR1	26, 27	$V_9 = 2.5$ to 0V	45	53		dB
Mixer conversion gain	CG1	26/23, 24 27/23, 24	$V_9 = 2.5\text{V}$	19	22	25	dB
Mixer inter modulation 1	IM3 1	26/23, 24 27/23, 24	Input = $75\text{dB}\mu$ $V_9 = 2.5\text{V}$	40	50		dB
IF input frequency range	$f_{(\text{IF})}$	4, 5	fc: -3dB	30		100	MHz
IF amplifier gain	$G_{(\text{AGC})}$	12/4, 5 13/4, 5	$V_9 = 2.5\text{V}$	51	55	59	dB
IF inter modulation 2	IM3 2	12/4, 5 13/4, 5	Output = $110\text{dB}\mu$	40	50		dB
Range	GR2	12, 13	IF Output Level < $\pm 1\text{dB}$	3	5		dB
IF AGC output level	$V_{Q(\text{IF}) 1}$	12	Single output		1.0		Vp-p
IF output level	$V_{Q(\text{IF}) 2}$	13	Single output		1.0		Vp-p

Package Dimensions


unit: mm

3222A

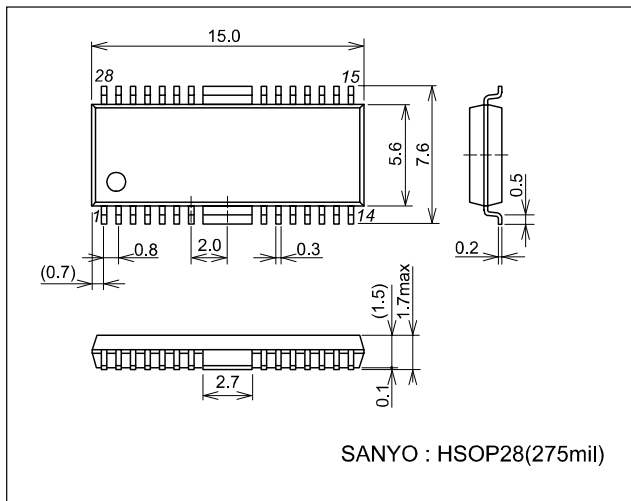


LA7784

Pin Assignment

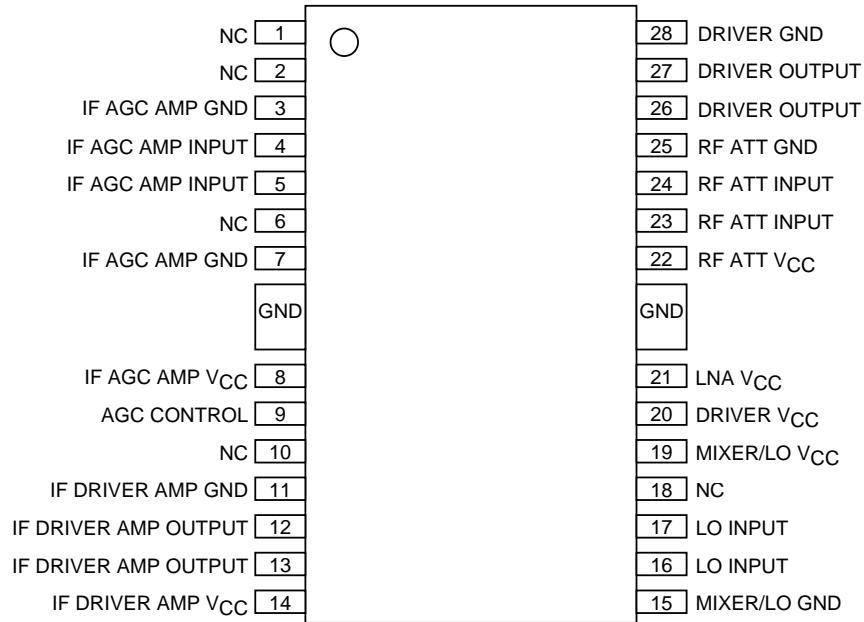

Block Diagram

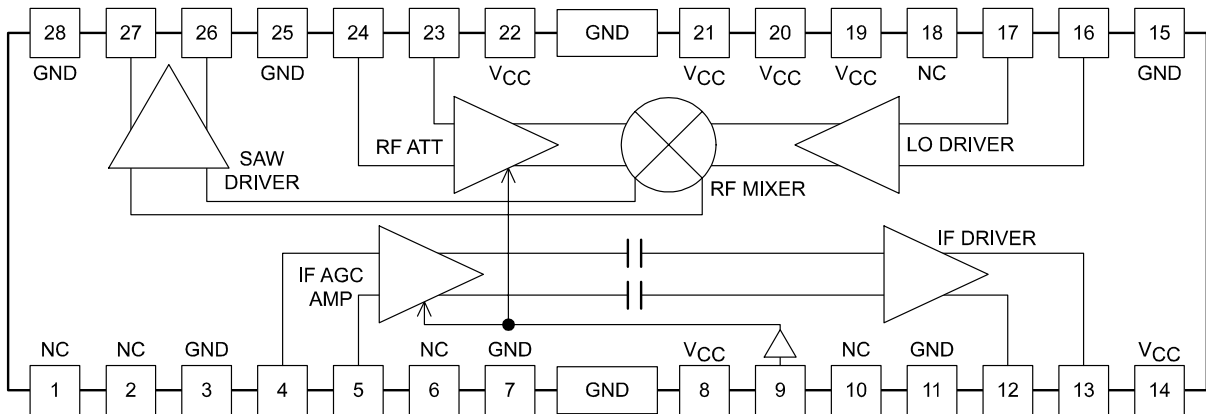

OMB05021

LA7784

Pin Description

(unit: Ω)



Pin Number	Description	Equivalent circuit
1	No Connection	
2	No Connection	
3	AGC Amp GND	
4 5	AGC Amp Input	<p style="text-align: right;">OMP05090</p>
6	No Connection	
7	AGC Amp GND	
8	AGC Amp VCC	
9	AGC Control	<p style="text-align: right;">OMP05091</p>
10	No Connection	
11	Post Amp GND	

Continued on next page.

LA7784

Continued from preceding page.

(unit: Ω)

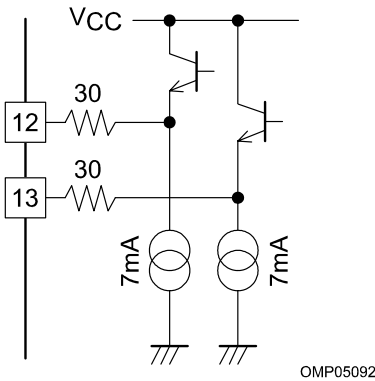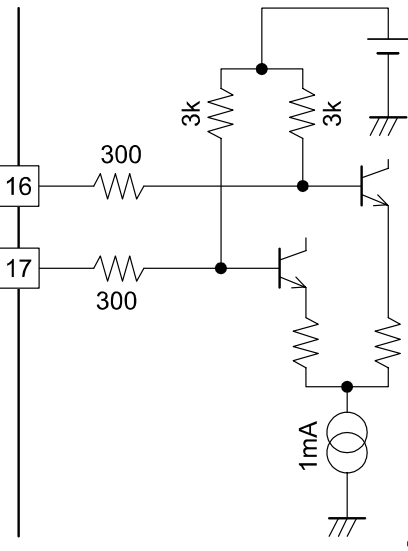Pin Number	Description	Equivalent circuit
12 13	Post Amp Outputs	 <p style="text-align: right; font-size: small;">OMP05092</p>
14	Post Amp V_{CC}	
15	Mixer/LO GND	
16 17	LO Input	 <p style="text-align: right; font-size: small;">OMP05093</p>
18	No Connection	
19	Mixer/LO V_{CC}	
20	Driver V_{CC}	

Continued on next page.

LA7784

Continued from preceding page.

(unit: Ω)

Pin Number	Description	Equivalent circuit
21 22	LNA VCC	<p style="text-align: right;">OMP05094</p>
23 24	LNA Inputs	
25	LNA GND	
26 27	Driver Outputs	<p style="text-align: right;">OMP05095</p>
28	Driver Gnd	

