

TC55329P/J-17, TC55329P/J-20
 TC55329P/J-25, TC55329P/J-35

32,768 WORD × 9 BIT CMOS STATIC RAM

DESCRIPTION

The TC55329P/J is a 294,912 bits high speed static random access memory organized as 32,768 words by 9 bits using CMOS technology, and operated from a single 5-volt supply. Toshiba's CMOS technology and advanced circuit form provide high speed feature.

The TC55329P/J has low power feature with device control using Chip Enable ($\overline{CE1}/\overline{CE2}$), and has Output Enable Input (\overline{OE}) for fast memory access. Also the device power at memory access is reduced by automatic power down circuit form.

The TC55329P/J is suitable for use in cache memory where high speed is required. All Inputs and Outputs are directly TTL compatible.

The TC55329P/J is packaged in a 32 pin standard DIP and SOJ with 300 mil width for high density surface assembly.

FEATURES

- Fast access time :

TC55329P/J-17	17ns(MAX.)
TC55329P/J-20	20ns(MAX.)
TC55329P/J-25	25ns(MAX.)
TC55329P/J-35	35ns(MAX.)
- Low power dissipation

Operation : TC55329P/J-17	140mA(MAX.)
TC55329P/J-20	140mA(MAX.)
TC55329P/J-25	140mA(MAX.)
TC55329P/J-35	120mA(MAX.)
Standby :	1mA(MAX.)
- 5V single power supply :

-17	: 5V±5%
-20/25/35	: 5V±10%
- Fully static operation
- All Inputs and Outputs : TTL compatible
- Output buffer control : \overline{OE}
- Package

32 pin plastic 300 mil DIP	: TC55329P
32 pin plastic 300 mil SOJ	: TC55329J


PIN CONNECTION



PIN NAMES

A0~A14	Address Inputs
VO1~VO9	Data Inputs/Outputs
CE1, CE2	Chip Enable Inputs
WE	Write Enable Input
OE	Output Enable Input
V _{DD}	Power (+5V)
GND	Ground
N.C.	No Connection

BLOCK DIAGRAM

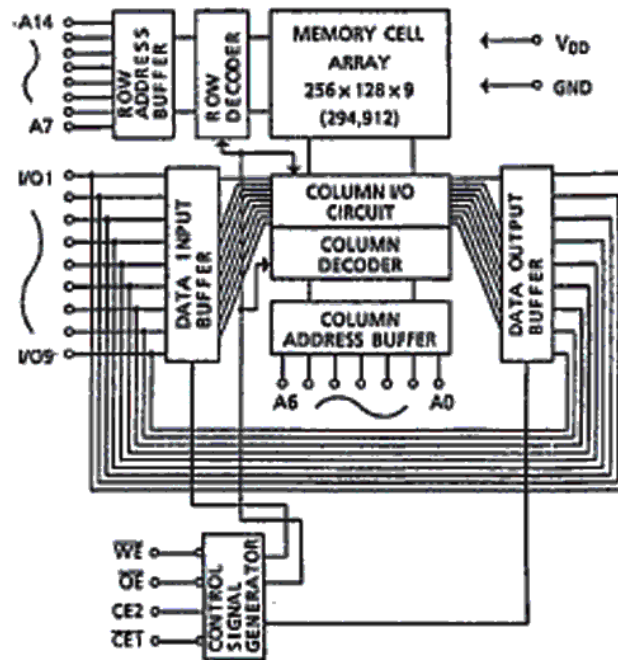

MAXIMUM RATINGS

SYMBOL	ITEM	RATING	UNIT
V _{DD}	Power Supply Voltage	-0.5~7.0	V
V _{IH}	Input Voltage	-2.0~7.0	V
V _{IO}	Input/Output Voltage	-0.5~V _{DD} +0.5	V
P _D	Power Dissipation	1.0	W
T _{solder}	Soldering Temperature · Time	260 · 10	°C · sec
T _{stg}	Storage Temperature	-65~150	°C
T _{opr}	Operating Temperature	-10~85	°C

DC RECOMMENDED OPERATING CONDITIONS (T_a = 0~70°C)

SYMBOL	PARAMETER	MIN.	TYP.	MAX.	UNIT	
V _{DD}	Power Supply Voltage	-17	4.75	5.0	5.25	V
		-20/25/35	4.5	5.0	5.5	
V _{IH}	Input High Voltage	2.2	-	V _{DD} + 0.5	V	
V _{IL}	Input Low Voltage	-0.5*	-	0.8	V	

* -3V Pulse Width : 10ns

DC and OPERATING CHARACTERISTICS (T_a = 0~70°C, -17: V_{DD} = 5V ± 5%, -20/25/35: V_{DD} = 5V ± 10%)

SYMBOL	PARAMETER	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
I _L	Input Leakage Current	V _{IH} = 0~V _{DD}	-	-	±1	µA	
I _{OH}	Output High Current	V _{OH} = 2.4V	-4	-	-	mA	
I _{OL}	Output Low Current	V _{OL} = 0.4V	8	-	-	mA	
I _{LO}	Output Leakage Current	CE1 = V _{IH} or CE2 = V _{IL} or OE = V _{IH} or WE = V _{IL} V _{OUT} = 0~V _{DD}	-	-	±1	µA	
I _{DDO}	Operating Current	t _{cycle} = Min cycle CE1 = V _{IL} and CE2 = V _{IH} Other Input = V _{IH} /V _{IL}	V _{DD} = 5.25V	-17	-	140	mA
			-20	-	140		
		V _{DD} = 5.5V	-25	-	140		
		-35	-	120			
I _{DD1}	Standby Current	t _{cycle} = Min cycle CE1 = V _{IH} or CE2 = V _{IL} Other Input = V _{IH} /V _{IL}	V _{DD} = 5.25V	-17	-	20	mA
			-20	-	20		
		V _{DD} = 5.5V	-25	-	20		
		-35	-	20			
I _{DD2}		CE1 = V _{DD} - 0.2V or CE2 = 0.2V Other Input = V _{DD} - 0.2V or 0.2V	-	-	1		

CAPACITANCE (T_a = 25°C, f = 1.0MHz)

SYMBOL	PARAMETER	TEST CONDITION	MAX.	UNIT
C _{IH}	Input Capacitance	V _{IH} = GND	6	pF
C _{OUT}	Output Capacitance	V _{OUT} = GND	8	pF

- Note : This parameter is periodically sampled and is not 100% tested.

TC55329P/J-17, TC55329P/J-20 TC55329P/J-25, TC55329P/J-35

AC CHARACTERISTICS (Ta = 0~70°C (1), -17: V_{DD} = 5V ± 5%, -20/25/35: V_{DD} = 5V ± 10%)

READ CYCLE

SYMBOL	PARAMETER	TC55329P/J-17		TC55329P/J-20		TC55329P/J-25		TC55329P/J-35		UNIT
		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	
t _{RC}	Read Cycle Time	17	-	20	-	25	-	35	-	ns
t _{ACC}	Address Access Time	-	17	-	20	-	25	-	35	
t _{CO1}	CE1 Access Time	-	17	-	20	-	25	-	35	
t _{CO2}	CE2 Access Time	-	17	-	20	-	25	-	35	
t _{OE}	OE Access Time	-	9	-	10	-	12	-	15	
t _{OH}	Output Data Hold Time from Address Change	5	-	5	-	5	-	5	-	
t _{OE}	Output Enable Time from CE1 or CE2	5	-	5	-	5	-	5	-	
t _{OD}	Output Disable Time from CE1 or CE2	-	10	-	10	-	10	-	15	
t _{OE}	Output Enable Time from OE	0	-	0	-	0	-	0	-	
t _{OD}	Output Disable Time from OE	-	8	-	8	-	10	-	15	
t _{PU}	Chip Selection to Power Up Time	0	-	0	-	0	-	0	-	
t _{PD}	Chip Deselection to Power Down Time	-	17	-	20	-	25	-	35	


WRITE CYCLE

SYMBOL	PARAMETER	TC55329P/J-17		TC55329P/J-20		TC55329P/J-25		TC55329P/J-35		UNIT
		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	
t _{WC}	Write Cycle Time	17	-	20	-	25	-	35	-	ns
t _{CV}	Chip Enable to End of Write	13	-	13	-	15	-	20	-	
t _{AS}	Address Set Up Time	0	-	0	-	0	-	0	-	
t _{WP}	Write Pulse Width	13	-	13	-	15	-	20	-	
t _{WR}	Write Recovery Time	0	-	0	-	0	-	0	-	
t _{DS}	Data Set Up Time	10	-	10	-	12	-	15	-	
t _{DH}	Data Hold Time	0	-	0	-	0	-	0	-	
t _{OPW}	Output Enable Time from WE	0	-	0	-	0	-	0	-	
t _{ODW}	Output Disable Time from WE	-	8	-	8	-	10	-	15	

AC TEST CONDITIONS

Input Pulse Levels	3.0V/0.0V
Input Pulse Rise and Fall Time	3ns
Input Timing Measurement Reference Levels	2.2V/0.8V
Output Timing Measurement Reference Levels	2.0V/0.8V
Output Load	Fig.1


Fig.1

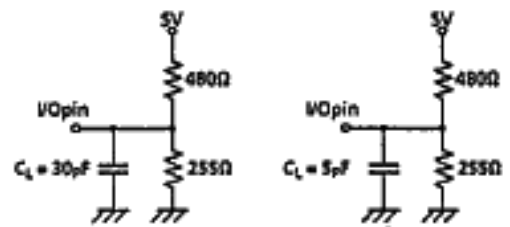


(For t_{CO1}, t_{OE1}, t_{CO2}, t_{OD1}, t_{OD2} and t_{ODW})

TIMING WAVEFORMS


READ CYCLE (2)

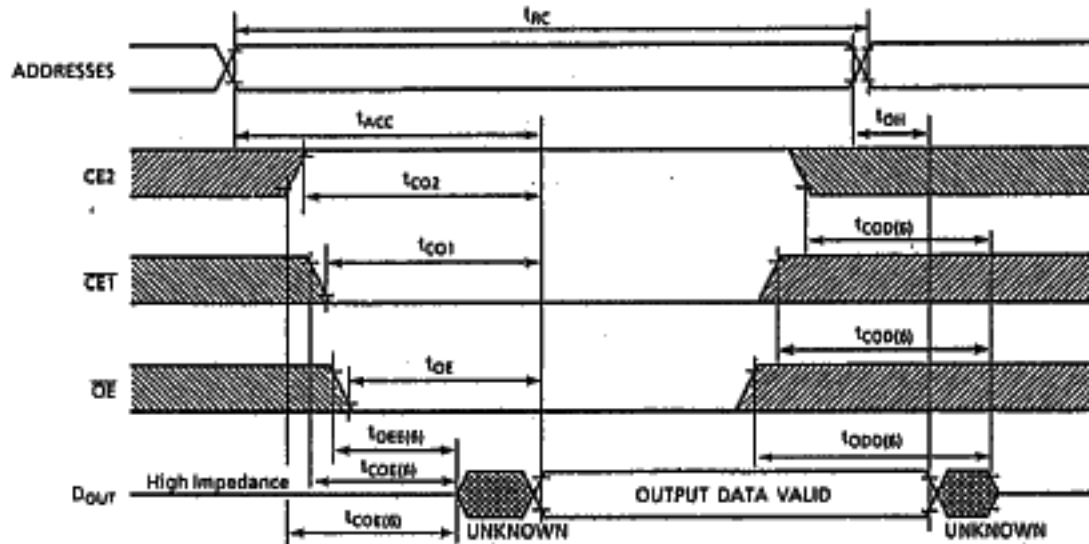


WRITE CYCLE1 (5) (WE Controlled Write)

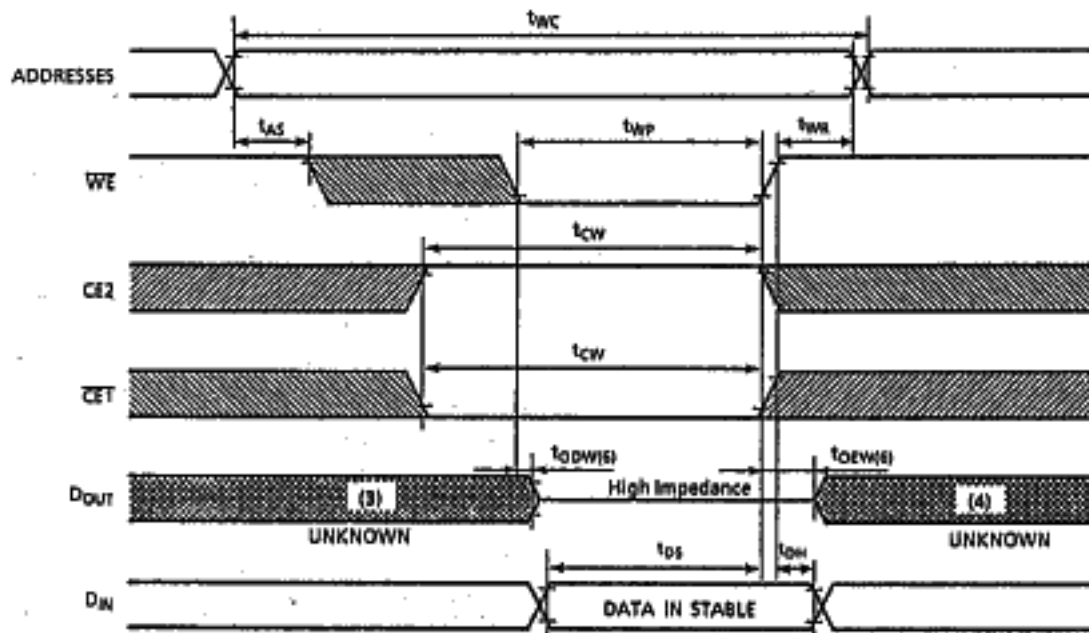

WRITE CYCLE 2 (3) (CET Controlled Write)

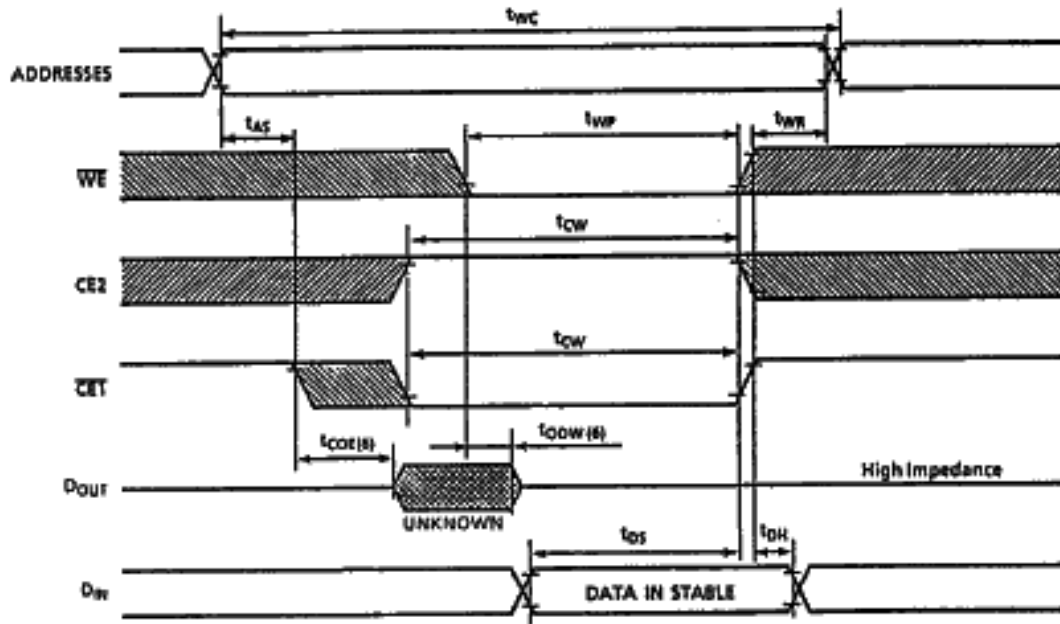


WRITE CYCLE 3 (3) (CE2 Controlled Write)

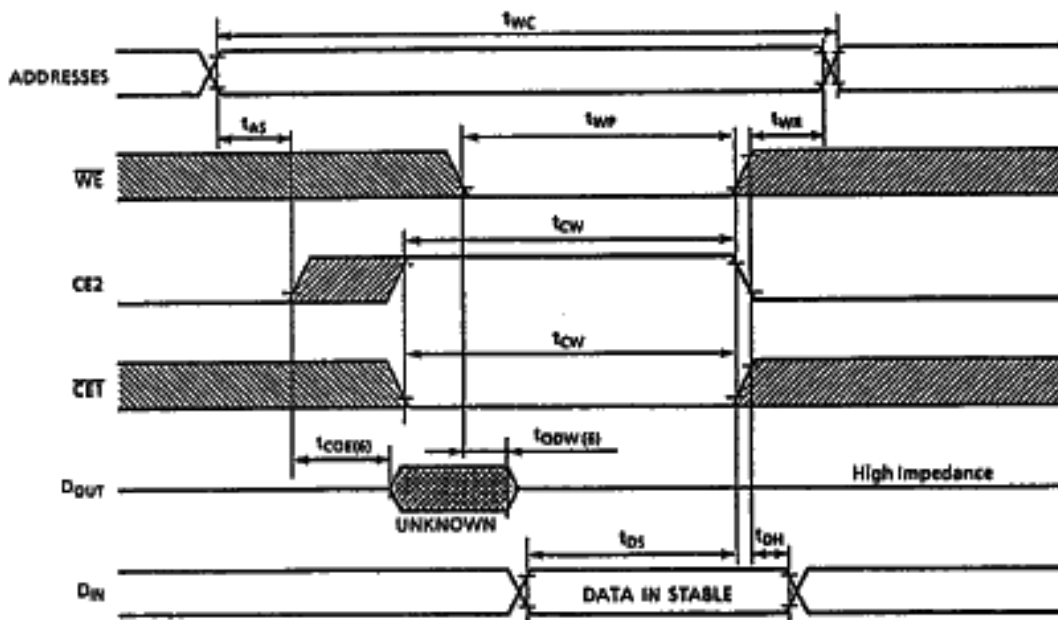

TC55329P/J-17, TC55329P/J-20
 TC55329P/J-25, TC55329P/J-35


- NOTE: 1. The operating temperature (T_a) is guaranteed with transverse air flow exceeding 400 linear feet per minute.
2. \overline{WE} is High for Read Cycle.
3. Assuming that $\overline{CE1}$ Low transition or $CE2$ High transition occurs coincident with or after \overline{WE} Low transition, Outputs remain in a high impedance state.
4. Assuming that $\overline{CE1}$ High transition or $CE2$ Low transition occurs coincident with or prior to \overline{WE} High transition, Outputs remain in a high impedance state.
5. Assuming that \overline{OE} is High for Write Cycle, Outputs are in a high impedance state during this period.
6. These parameters are specified as follows and measured by using the load shown in Fig.1.
- (A) t_{COE} , t_{OZE} , t_{OEw} Output Enable Time
- (B) t_{COD} , t_{ODO} , t_{ODW} Output Disable Time

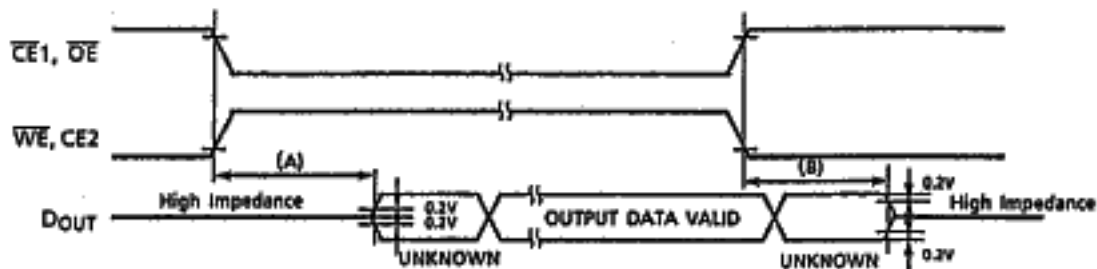

OUTLINE DRAWINGS

Plastic DIP (DIP32-P-300)

UNIT in mm

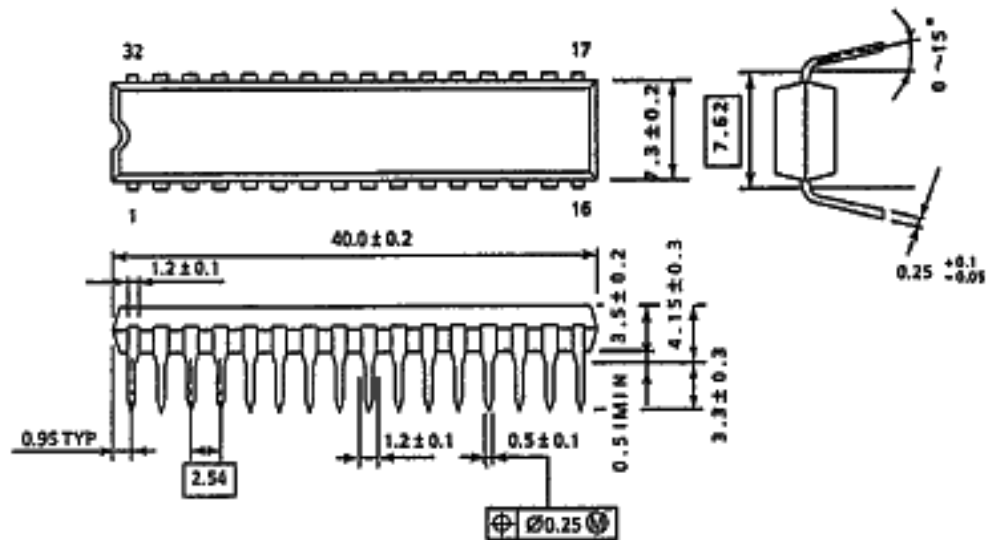


Note: Package width and length do not include mold protrusion, allowable mold protrusion is 0.15mm.

OUTLINE DRAWINGS

Plastic SOJ (SOJ32-P-300)

UNIT in mm

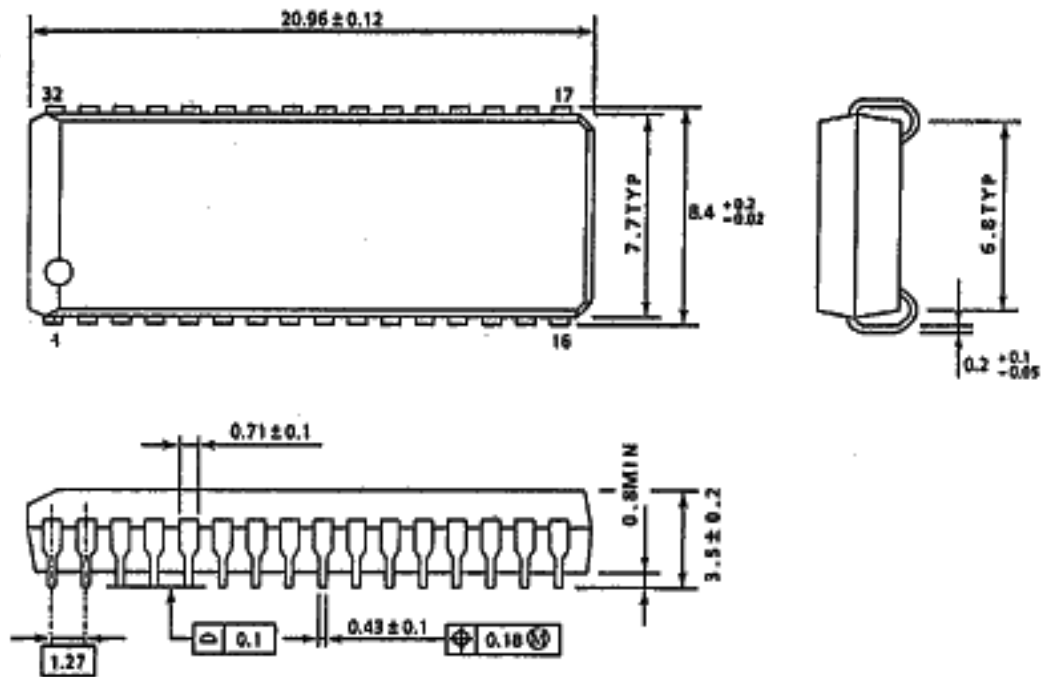

Note : Package width and length do not include mold protrusion, allowable mold protrusion is 0.15mm