

176079

# μA709

## HIGH-PERFORMANCE OPERATIONAL AMPLIFIER

### FAIRCHILD LINEAR INTEGRATED CIRCUITS


**GENERAL DESCRIPTION** — The μA709 is a monolithic High Gain Operational Amplifier constructed using the Fairchild Planar\* epitaxial process. It features low offset, high input impedance, large input common mode range, high output swing under load and low power consumption. The device displays exceptional temperature stability and will operate over a wide range of supply voltages with little performance degradation. The amplifier is intended for use in dc servo systems, high impedance analog computers, low level instrumentation applications and for the generation of special linear and nonlinear transfer functions.

**ABSOLUTE MAXIMUM RATINGS**

Supply Voltage	±18 V
Internal Power Dissipation (Note)	
Metal Can	500 mW
Mini DIP	310 mW
DIP	670 mW
Flatpak	570 mW
Differential Input Voltage	±5.0 V
Input Voltage	±10 V
Storage Temperature Range	
Metal, Hermetic DIP, and Flatpak	-65°C to +150°C
Molded DIP and Mini DIP	-55°C to +125°C
Operating Temperature Range	
Military (μA709A and μA709)	-55°C to +125°C
Commercial (μA709C)	0°C to +70°C
Pin Temperature	
Metal Can, Hermetic DIP, and Flatpak (Soldering 60 s)	300°C
Molded DIP and Mini DIP	260°C
Output Short-Circuit Duration	5 s

**NOTE:**  
Rating applies to ambient temperature up to 70°C. Above 70°C ambient derate linearly at 6.3mW/°C for Metal Can, 8.3mW/°C for DIP, 7.1mW/°C for the Flatpak and 5.6mW/°C for the Mini DIP.

**CONNECTION DIAGRAMS**  
**8-PIN METAL CAN**  
(TOP VIEW)  
PACKAGE OUTLINE 5S  
PACKAGE CODE H




**NOTE:** Pin 4 connected to case

**ORDER INFORMATION**

TYPE	PART NO.
μA709A	μA709AHM
μA709	μA709HM
μA709C	μA709HC

**CONNECTION DIAGRAMS**


**8-PIN MINI DIP**  
(TOP VIEW)  
PACKAGE OUTLINE 9T  
PACKAGE CODE T



**ORDER INFORMATION**

TYPE	PART NO.
μA709C	μA709TC


**10-PIN FLATPAK**  
(TOP VIEW)  
PACKAGE OUTLINE 3F  
PACKAGE CODE F

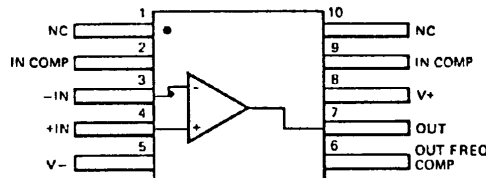

**ORDER INFORMATION**

TYPE	PART NO.
μA709A	μA709AFM
μA709	μA709FM

**14-PIN DIP**  
(TOP VIEW)  
PACKAGE OUTLINE 6A 9A  
PACKAGE CODE D P



**ORDER INFORMATION**

TYPE	PART NO.
μA709A	μA709ADM
μA709	μA709DM
μA709C	μA709DC
μA709C	μA709PC

\* Planar is a registered Fairchild process

FAIRCHILD •  $\mu A709$

$\mu A709A$

ELECTRICAL CHARACTERISTICS:  $T_A = +25^\circ C$ ,  $\pm 9 V < V_S < \pm 15 V$  unless otherwise specified.





CHARACTERISTICS (see definitions)	CONDITIONS	MIN	TYP	MAX	UNITS
Input Offset Voltage	$R_S \leq 10 \text{ k}\Omega$		0.6	2.0	mV
Input Offset Current			10	50	nA
Input Bias Current			100	200	nA
Input Resistance		350	700		k $\Omega$
Output Resistance			150		$\Omega$
Supply Current	$V_S = \pm 15 V$		2.5	3.6	mA
Power Consumption	$V_S = \pm 15 V$		75	108	mW
Transient Response	$V_S = \pm 15 V$ , $V_{IN} = 20 \text{ mV}$ , $R_L = 2 \text{ k}\Omega$ , $C_1 = 5 \text{ nF}$ , $R_1 = 1.5 \text{ k}\Omega$ , $C_2 = 200 \text{ pF}$ , $R_2 = 50 \Omega$ $C_L \leq 100 \text{ pF}$			1.5	$\mu s$
		Overshoot			30

The following specifications apply for  $-55^\circ C \leq T_A \leq +125^\circ C$ :

Input Offset Voltage	$R_S \leq 10 \text{ k}\Omega$			3.0	mV
Average Temperature Coefficient of Input Offset Voltage	$R_S = 50 \Omega$ , $T_A = +25^\circ C$ to $+125^\circ C$		1.8	10	$\mu V/^\circ C$
	$R_S = 50 \Omega$ , $T_A = +25^\circ C$ to $-55^\circ C$		1.8	10	$\mu V/^\circ C$
	$R_S = 10 \text{ k}\Omega$ , $T_A = +25^\circ C$ to $+125^\circ C$		2.0	15	$\mu V/^\circ C$
	$R_S = 10 \text{ k}\Omega$ , $T_A = +25^\circ C$ to $-55^\circ C$		4.8	25	$\mu V/^\circ C$
Input Offset Current	$T_A = +125^\circ C$		3.5	50	nA
	$T_A = -55^\circ C$		40	250	nA
Average Temperature Coefficient of Input Offset Current	$T_A = +25^\circ C$ to $+125^\circ C$		0.08	0.5	nA/°C
	$T_A = +25^\circ C$ to $-55^\circ C$		0.45	2.8	nA/°C
Input Bias Current	$T_A = -55^\circ C$		300	600	nA
Input Resistance	$T_A = -55^\circ C$	85	170		k $\Omega$
Input Voltage Range	$V_S = \pm 15 V$	$\pm 8.0$			V
Common Mode Rejection Ratio	$R_S \leq 10 \text{ k}\Omega$	80	110		dB
Supply Voltage Rejection Ratio	$R_S \leq 10 \text{ k}\Omega$		40	100	$\mu V/V$
Large Signal Voltage Gain	$V_S = \pm 15 V$ , $R_L \geq 2 \text{ k}\Omega$ , $V_{OUT} = \pm 10 V$	25,000		70,000	V/V
Output Voltage Swing	$V_S = \pm 15 V$ , $R_L \geq 10 \text{ k}\Omega$	$\pm 12$	$\pm 14$		V
	$V_S = \pm 15 V$ , $R_L \geq 2 \text{ k}\Omega$	$\pm 10$	$\pm 13$		V
Supply Current	$T_A = +125^\circ C$ , $V_S = \pm 15 V$		2.1	3.0	mA
	$T_A = -55^\circ C$ , $V_S = \pm 15 V$		2.7	4.5	mA
Power Consumption	$T_A = +125^\circ C$ , $V_S = \pm 15 V$		63	90	mW
	$T_A = -55^\circ C$ , $V_S = \pm 15 V$		81	135	mW

5

PERFORMANCE CURVES FOR  $\mu A709A$

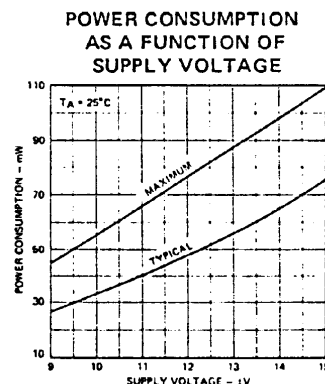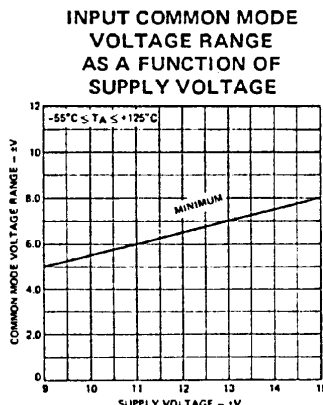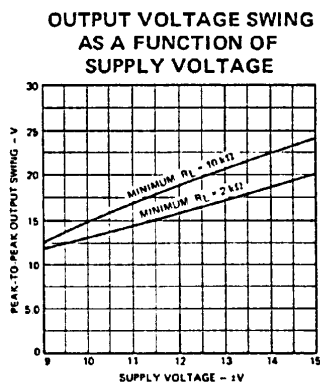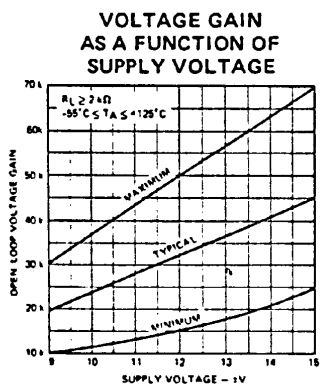

# FAIRCHILD • $\mu$ A709

$\mu$ A709

ELECTRICAL CHARACTERISTICS:  $T_A = +25^\circ\text{C}$ ,  $\pm 9\text{ V} < V_S < \pm 15\text{ V}$  unless otherwise specified.


CHARACTERISTICS (see definitions)	CONDITIONS	MIN	TYP	MAX	UNITS
Input Offset Voltage	$R_S \leq 10\text{ k}\Omega$		1.0	5.0	mV
Input Offset Current			50	200	nA
Input Bias Current			200	500	nA
Input Resistance		150	400		$\text{k}\Omega$
Output Resistance			150		$\Omega$
Power Consumption	$V_S = \pm 15\text{ V}$		80	165	mW
Transient Response	Rise time		0.3	1.0	
	Overshoot				

The following specifications apply for  $-55^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ :


Input Offset Voltage	$R_S \leq 10\text{ k}\Omega$			6.0	mV
Average Temperature Coefficient of Input Offset Voltage	$R_S = 50\Omega$		3.0		$\mu\text{V}/^\circ\text{C}$
	$R_S \leq 10\text{ k}\Omega$		6.0		$\mu\text{V}/^\circ\text{C}$
Large Signal Voltage Gain	$V_S = \pm 15\text{ V}$ , $R_L \geq 2\text{ k}\Omega$ , $V_{\text{OUT}} = \pm 10\text{ V}$	25,000	45,000	70,000	V/V
Output Voltage Swing	$V_S = \pm 15\text{ V}$ , $R_L \geq 10\text{ k}\Omega$	$\pm 12$	$\pm 14$		V
	$V_S = \pm 15\text{ V}$ , $R_L \geq 2\text{ k}\Omega$	$\pm 10$	$\pm 13$		V
Input Voltage Range	$V_S = \pm 15\text{ V}$	$\pm 8.0$	$\pm 10$		V
Common Mode Rejection Ratio	$R_S \leq 10\text{ k}\Omega$	70	90		dB
Supply Voltage Rejection Ratio	$R_S \leq 10\text{ k}\Omega$		25	150	$\mu\text{V}/\text{V}$
Input Offset Current	$T_A = +125^\circ\text{C}$		20	200	nA
	$T_A = -55^\circ\text{C}$		100	500	nA
Input Bias Current	$T_A = -55^\circ\text{C}$		0.5	1.5	$\mu\text{A}$
Input Resistance		40	100		$\text{k}\Omega$

## PERFORMANCE CURVES FOR $\mu$ A709


**VOLTAGE GAIN AS A FUNCTION OF SUPPLY VOLTAGE**




**OUTPUT VOLTAGE SWING AS A FUNCTION OF SUPPLY VOLTAGE**



**INPUT COMMON MODE VOLTAGE RANGE AS A FUNCTION OF SUPPLY VOLTAGE**



**POWER CONSUMPTION AS A FUNCTION OF SUPPLY VOLTAGE**



$\mu$ A709C




ELECTRICAL CHARACTERISTICS:  $V_S = \pm 15$  V,  $T_A = 25^\circ$ C unless otherwise specified.

CHARACTERISTICS (see definitions)	CONDITIONS	MIN	TYP	MAX	UNITS
Input Offset Voltage	$R_S \leq 10$ k $\Omega$ , $\pm 9$ V $\leq V_S \leq \pm 15$ V		2.0	7.5	mV
Input Offset Current			100	500	nA
Input Bias Current			0.3	1.5	$\mu$ A
Input Resistance		50	250		k $\Omega$
Output Resistance			150		$\Omega$
Large Signal Voltage Gain	$R_L \geq 2$ k $\Omega$ , $V_{OUT} = \pm 10$ V	15,000	45,000		V/V
Output Voltage Swing	$R_L \geq 10$ k $\Omega$	$\pm 12$	$\pm 14$		V
	$R_L \geq 2$ k $\Omega$	$\pm 10$	$\pm 13$		V
Input Voltage Range		$\pm 8.0$	$\pm 10$		V
Common Mode Rejection Ratio	$R_S \leq 10$ k $\Omega$	65	90		dB
Supply Voltage Rejection Ratio	$R_S \leq 10$ k $\Omega$		25	200	$\mu$ V/V
Power Consumption			80	200	mW
Transient Response	$V_{IN} = 20$ mV, $R_L = 2$ k $\Omega$ , $C_1 = 5000$ pF, $R_1 = 1.5$ k $\Omega$ , $C_2 = 200$ pF, $R_2 = 50$ $\Omega$ , $C_L \leq 100$ pF	Rise time		0.3	$\mu$ s
		Overshoot		10	%




The following specifications apply for  $0^\circ$ C  $\leq T_A \leq +70^\circ$ C:

Input Offset Voltage	$R_S \leq 10$ k $\Omega$ , $\pm 9$ V $\leq V_S \leq \pm 15$ V			10	mV
Input Offset Current				750	nA
Input Bias Current				2.0	$\mu$ A
Large Signal Voltage Gain	$R_L \geq 2$ k $\Omega$ , $V_{OUT} = \pm 10$ V	12,000			V/V
Input Resistance		35			k $\Omega$












PERFORMANCE CURVES FOR  $\mu$ A709C

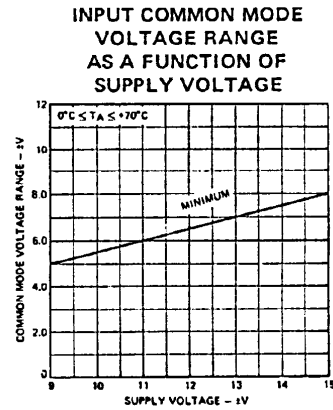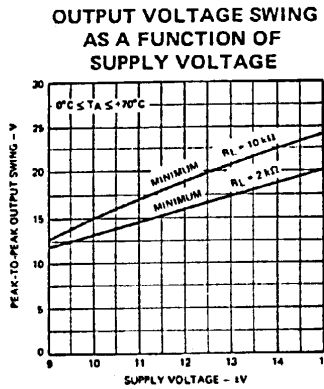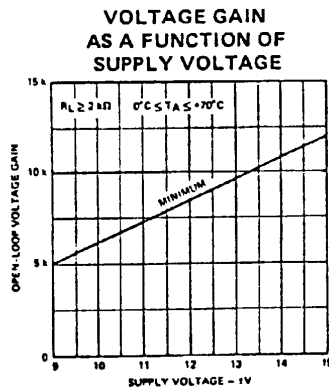


FREQUENCY COMPENSATION CURVES FOR ALL TYPES

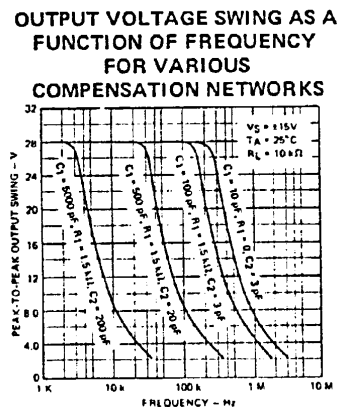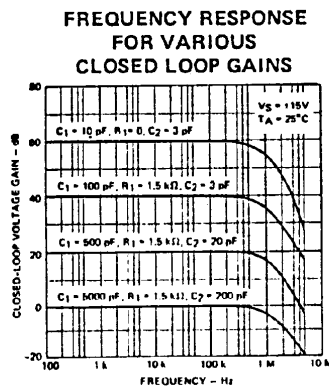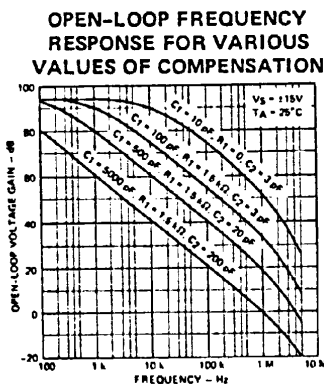








TYPICAL PERFORMANCE CURVES FOR  $\mu A709A$

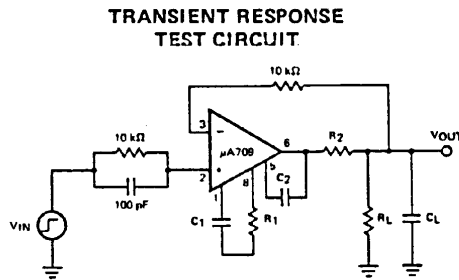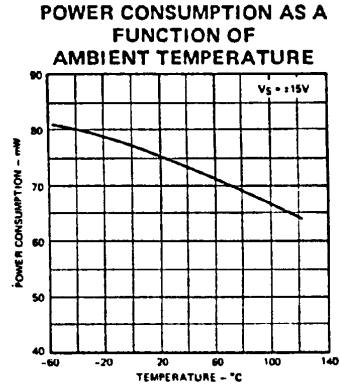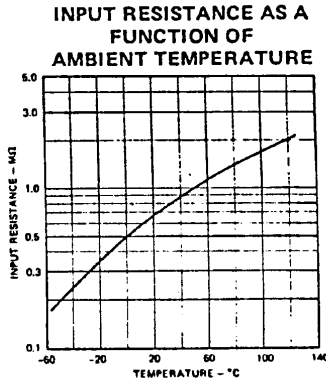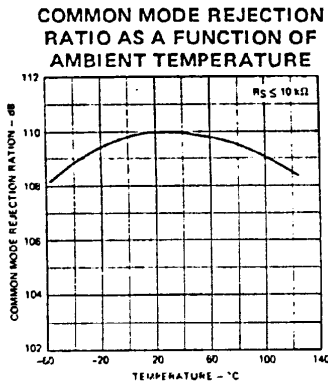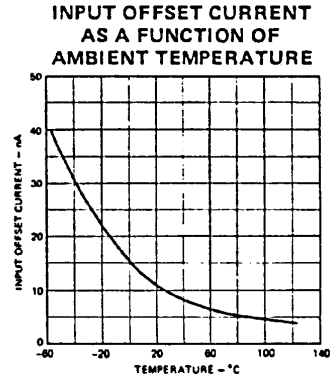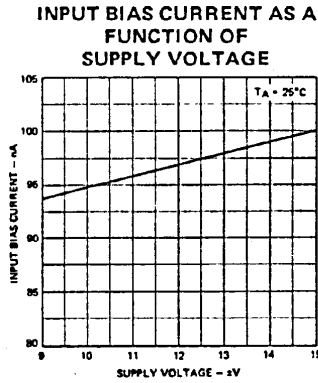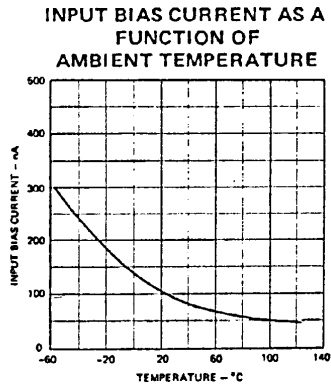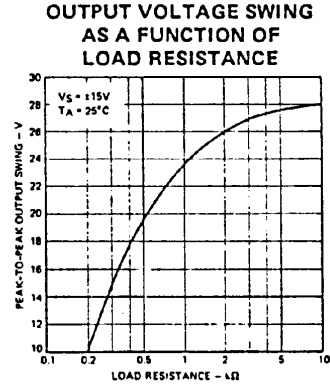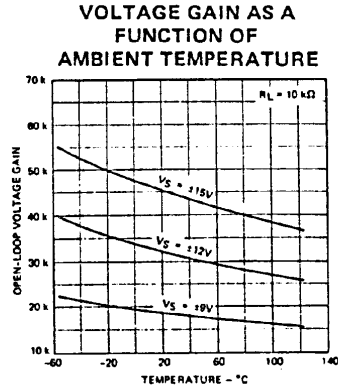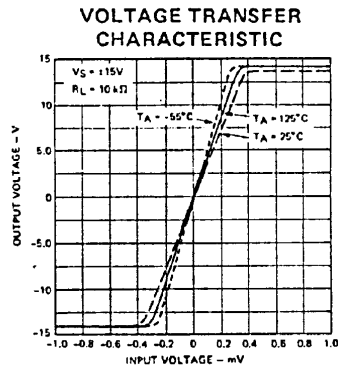


Pin numbers on this and all succeeding circuits apply to metal can or mini DIP package.

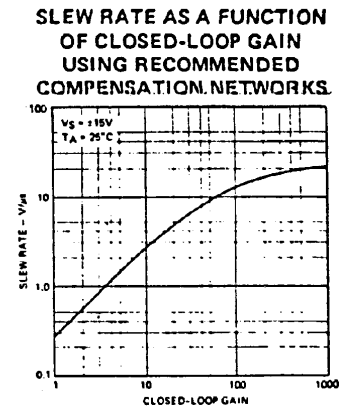


TYPICAL PERFORMANCE CURVES FOR  $\mu A709$  AND  $\mu A709C$

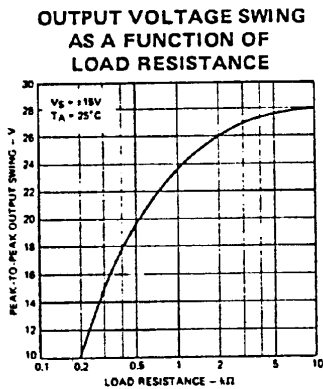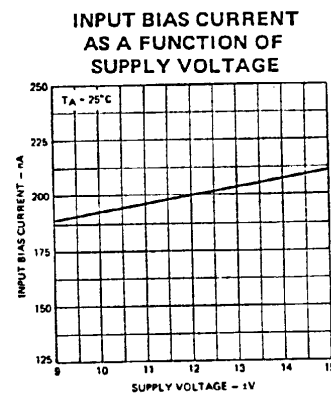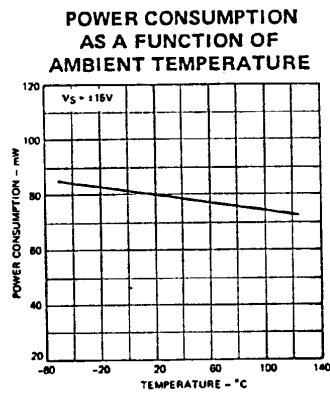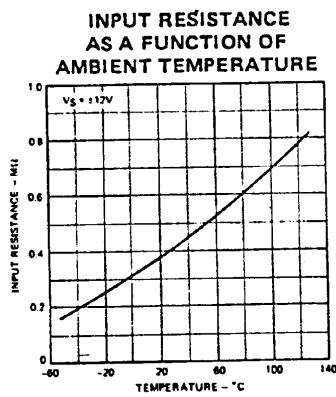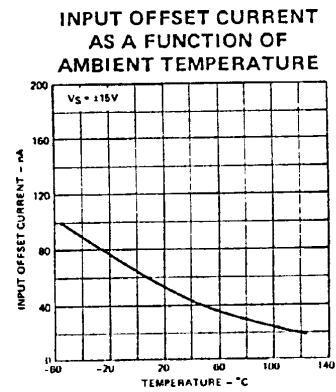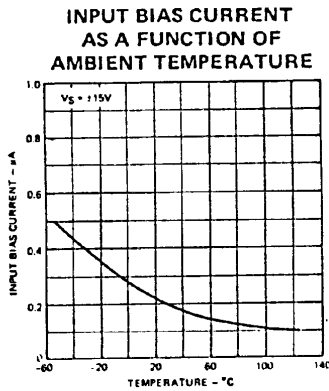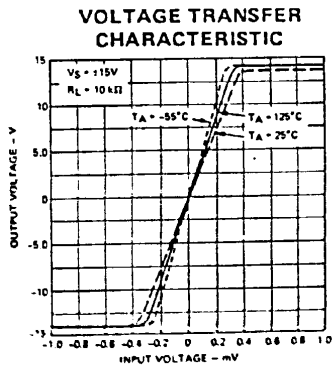


**FREQUENCY COMPENSATION CIRCUIT**




\* Use  $R_2 = 50 \Omega$  when the amplifier is operated with capacitive loading.



**FREQUENCY CHARACTERISTICS AS A FUNCTION OF SUPPLY VOLTAGE**




**FREQUENCY CHARACTERISTICS AS A FUNCTION OF AMBIENT TEMPERATURE**




FAIRCHILD •  $\mu$ A709

PROTECTION CIRCUITS


OUTPUT  
SHORT-CIRCUIT PROTECTION




INPUT  
BREAKDOWN-PROTECTION

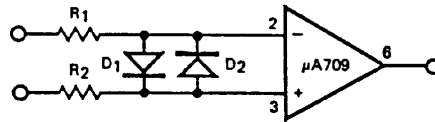

LATCH-UP PROTECTION

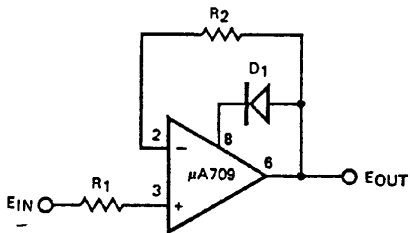

SUPPLY  
OVERVOLTAGE-PROTECTION

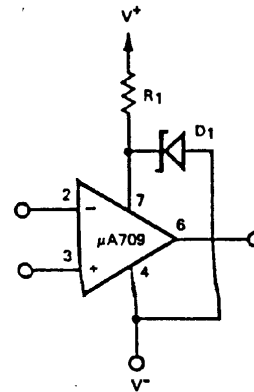

Pin numbers apply to metal can or mini DIP package only.

EQUIVALENT CIRCUIT

