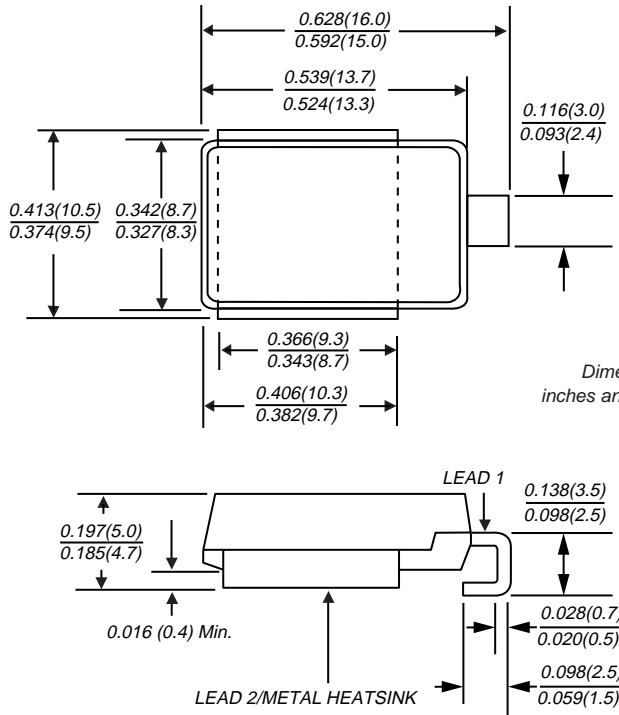
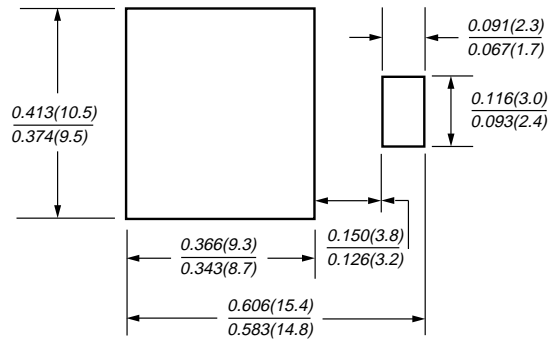


Surface Mount Automotive Transient Voltage Suppressor


DO-218AB
Zener Voltage 27V **Peak Pulse Current 130A(10/10,000µs)**
Peak Pulse Power 6600W (10/1,000µs)


Patented*

Mounting Pad Layout


*Patent #s:
 4,980,315
 5,166,769
 5,278,095

Features

- Ideally suited for load dump protection
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- High temperature stability due to unique oxide passivation and patented PAR[®] construction
- Integrally molded heatsink provides a very low thermal resistance for maximum heat dissipation
- Low leakage current at T_J = 175°C
- High temperature soldering guaranteed: 260°C for 10 seconds at terminals
- Meets ISO7637-2 surge spec.
- Low forward voltage drop

Mechanical Data

Case: Molded plastic body, surface mount with heatsink integrally mounted in the encapsulation

Terminals: Plated, solderable per MIL-STD-750, Method 2026

Polarity: Heatsink is anode

Mounting Position: Any

Weight: 0.091 oz., 2.58 g

Packaging codes/options:

- 2D/750 per 13" Reel (16mm Tape), anode towards sprocket hole, 4.5K/box
- 2E/750 per 13" Reel (16mm Tape), cathode towards sprocket hole, 4.5K/box

Maximum Ratings and Thermal Characteristics (T_C = 25°C unless otherwise noted)





Parameter	Symbol	Value	Unit
Steady state power dissipation	P _D	8.0	W
Non-repetitive peak reverse surge current for 10µs/10ms exponentially decaying waveform	I _{RSM}	130	A
Maximum working stand-off voltage	V _{WM}	22.0	V
Peak forward surge current 8.3ms single half sine-wave	I _{FSM}	700	A
Typical thermal resistance junction to case	R _{θJC}	0.90	°C/W
Operating junction and storage temperature range	T _J , T _{STG}	-55 to +175	°C

Electrical Characteristics (T_C = 25°C unless otherwise noted)




Parameter	Symbol	Min	Typ	Max	Unit
Reverse zener voltage at 10mA	V _Z	24.0	–	30.0	V
Zener voltage temperature coefficient at I _Z = 10mA	V _{ZTC}	–	–	36	mV/°C
Clamping voltage for 10μs/10ms exponentially decaying waveform at I _{PP} = 75A	V _C	–	–	40.0	V
Instantaneous forward voltage ⁽¹⁾	V _F	–	–	0.98	V
		at 6.0A	–	–	
		at 100A	0.93	–	
Reverse leakage current at rated V _{WM}	I _R	–	–	1.0	μA
		T _J = 25°C	–	50.0	
		T _J = 175°C	–	–	

Notes: (1) Measured on a 300μs square pulse width

Ratings and Characteristic Curves T_A=25°C unless otherwise noted.

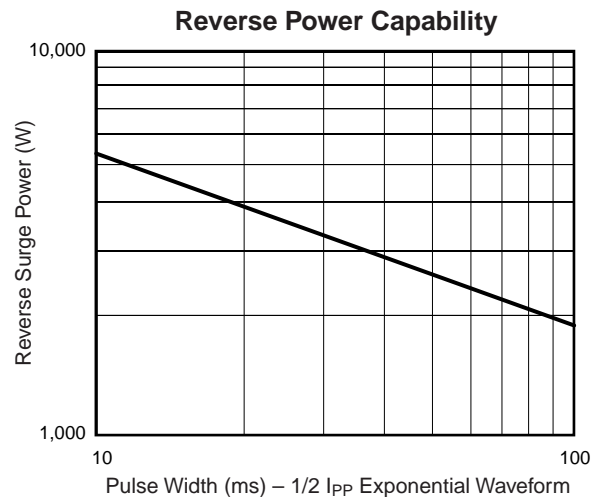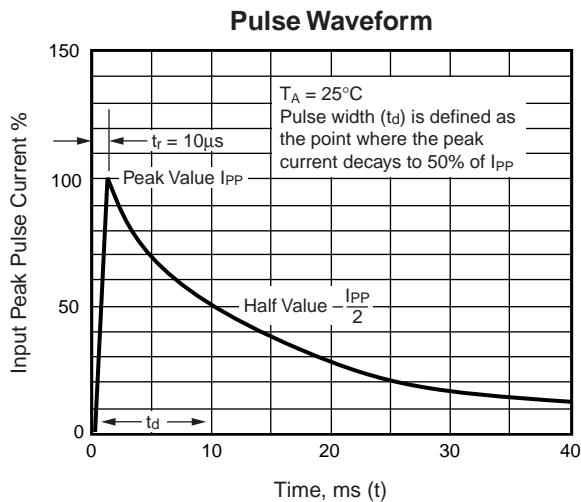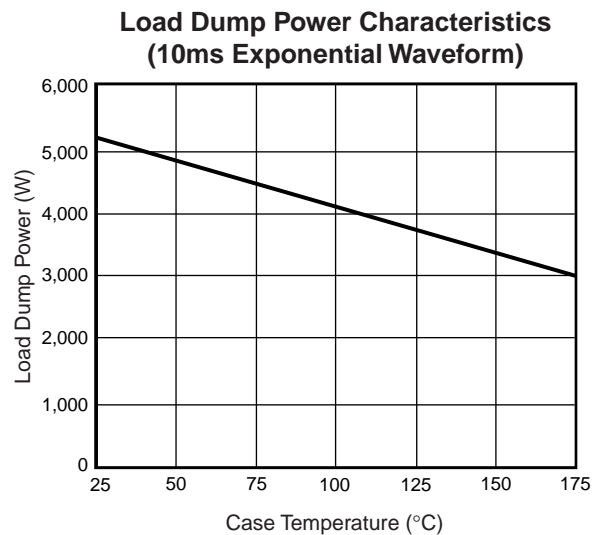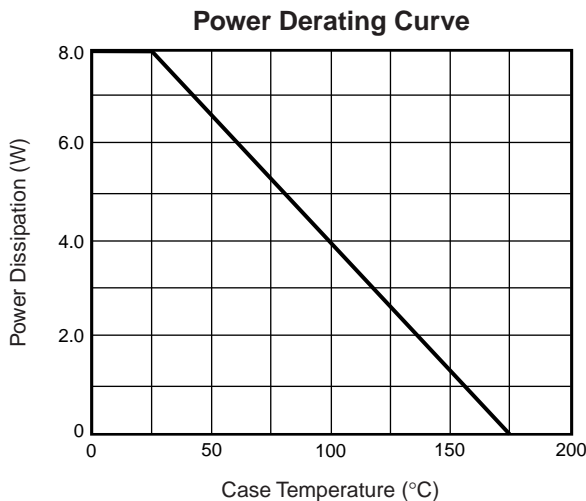

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

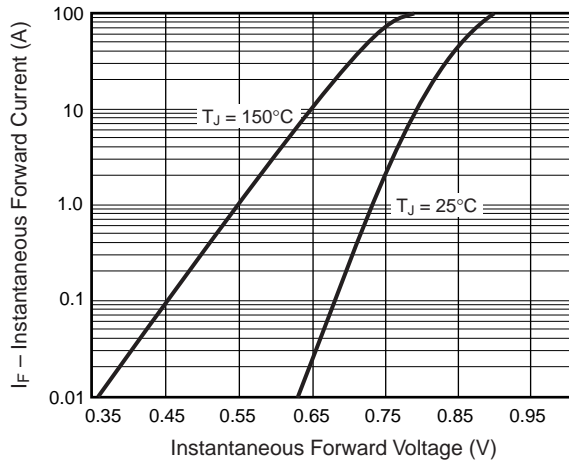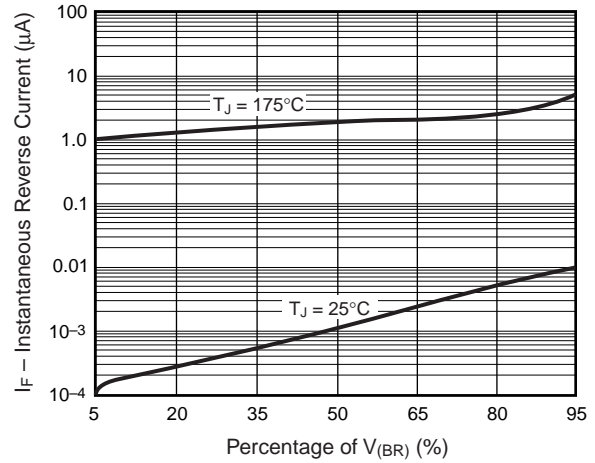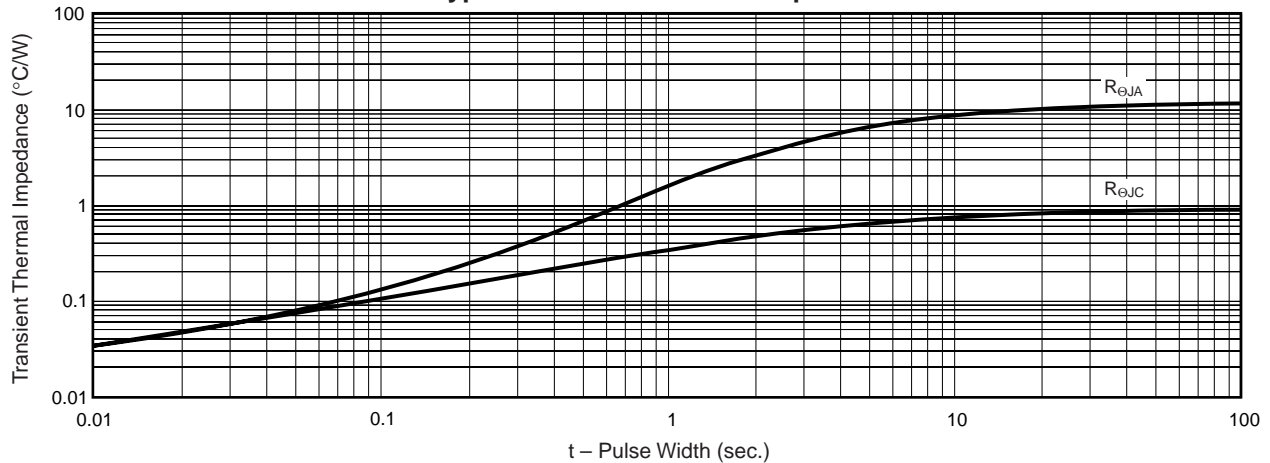Typical Instantaneous Forward Characteristics

Typical Reverse Characteristics

Typical Transient Thermal Impedance


This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.