

## BIPOLAR ANALOG INTEGRATED CIRCUITS

 $\mu$ PC1241H,  $\mu$ PC1242H

T-74-05-01

## 7 W AF POWER AMPLIFIER

## DESCRIPTION

The  $\mu$ PC1241H and  $\mu$ PC1242H are audio power amplifiers which is especially designed for car radio and car stereo.

The devices are encapsulated in newly developed small packages featuring low thermal resistance, providing easy design for 2  $\Omega$  load circuit.

At 14.4 V the devices give output power of 7 W at  $R_L = 4 \Omega$  and 11 W at  $R_L = 2 \Omega$


## FEATURES

- High output power :  $P_O = 7 \text{ W TYP.}$  @  $R_L = 4 \Omega$ , T.H.D. = 10%,  $V_{CC} = 14.4 \text{ V}$   
 $P_O = 11 \text{ W TYP.}$  @  $R_L = 2 \Omega$ , T.H.D. = 10%,  $V_{CC} = 14.4 \text{ V}$
- Low distortion : T.H.D. = 0.1 % TYP. @  $R_L = 4 \Omega$ ,  $P_O = 0.5 \text{ W}$
- High reliability : of the chip and package with additional complete safety during operation thanks to protection against:
  - (1) Load dump voltage surge.
  - (2) Over rating chip temperature (150 °C).
  - (3) Output DC and AC short circuit to ground or  $V_{CC}$ .
  - (4) Reverse insertion.

These ICs are not destroyed nor damaged even when any of neighboring two terminals are shorted to each other.

- Space and cost saving: very low number of external components, very simple mounting system with no electrical isolation between the package and the heat sink (one screw only).
- Pin orders of these types are symmetrical each other, which reduces the area of Printed Circuit Board effectively.


## PACKAGE DIMENSIONS (Unit : mm)

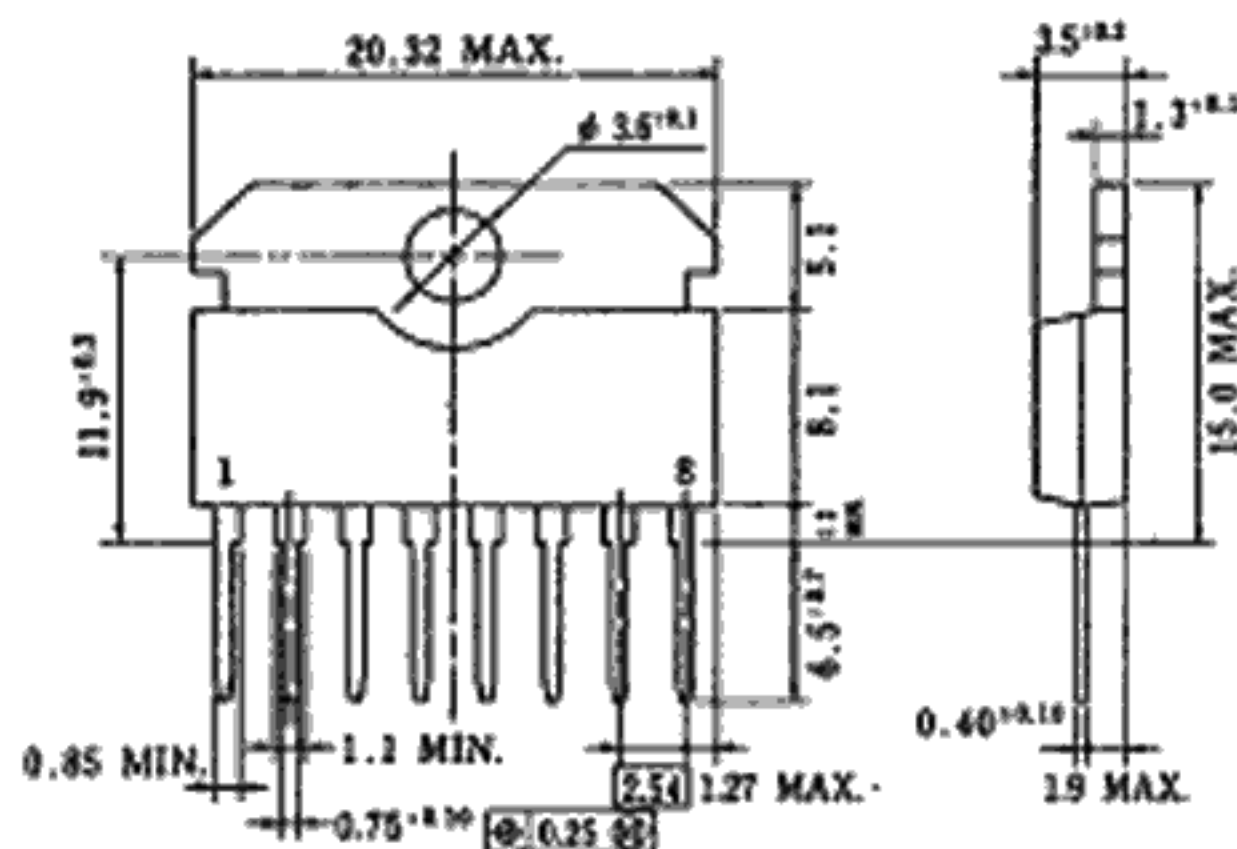



P80P-1502

## BLOCK DIAGRAM

T-74-05-01

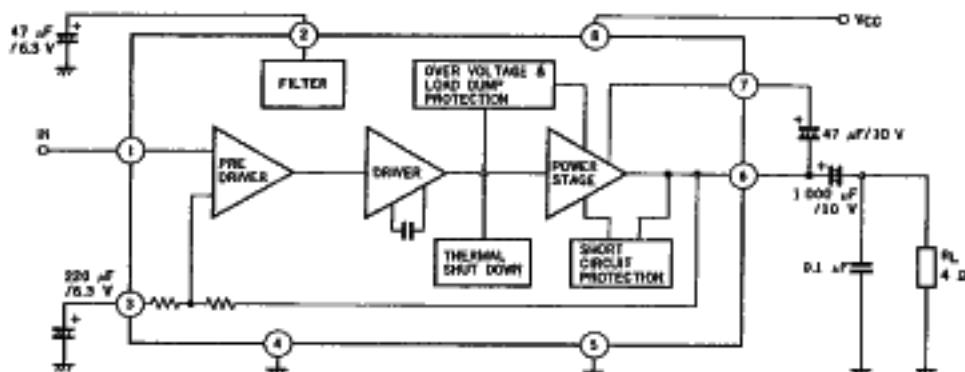

## CONNECTION DIAGRAM

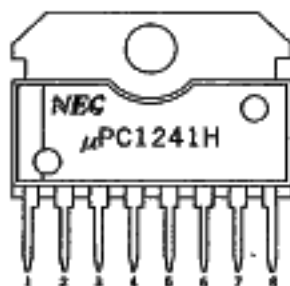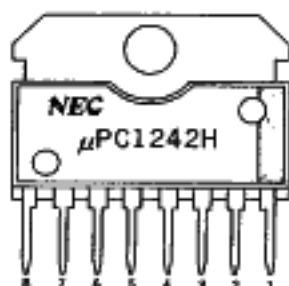 $\mu$ PC1241H $\mu$ PC1242H

Pin No.	$\mu$ PC1241H $\mu$ PC1242H
1	Input
2	Bypass
3	Feedback
4	GND (for Input)
5	GND (for Output)
6	Output
7	Bootstrap
8	Power supply

T-74-05-01

ABSOLUTE MAXIMUM RATINGS ( $T_a = 25^\circ\text{C}$ )

Supply Voltage (Surge PW=200 ms)	$V_{CC \text{ surge}}$	80	V
Supply Voltage (Operational)	$V_{CC}$	18*	V
Circuit Current (Peak)	$I_{CC \text{ peak}}$	4.5	A
Package Dissipation	$P_D$	12	W
Operating Temperature	$T_{opt}$	-30 to +75*	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-65 to +150	$^\circ\text{C}$

\*Using an aluminum heat sink 100 X 100 X 1 mm


RECOMMENDED CONDITIONS ( $T_a = 25^\circ\text{C}$ )

Supply Voltage Range	9.5 to 18	V
Load Impedance	2 to 16	$\Omega$

ELECTRICAL CHARACTERISTICS ( $T_a = 25^\circ\text{C}$ ,  $f = 1 \text{ kHz}$ ,  $R_L = 4 \Omega$ )




CHARACTERISTIC	SYMBOL	MIN.	TYF.	MAX.	UNIT	TEST CONDITION
Over Voltage Protection	$V_{CC(MAX.)}$	18	19		V	
Circuit Current	$I_{CC}$	25	45	80	mA	$V_{in} = 6$ , $V_{CC} = 13.2 \text{ V}$
Output Power	$P_O$	5.0	5.8		W	$R_L = 4 \Omega$ , T.H.D. = 10%, $V_{CC} = 13.2 \text{ V}$
			7		W	$R_L = 4 \Omega$ , T.H.D. = 10%, $V_{CC} = 14.4 \text{ V}$
			9.2		W	$R_L = 2 \Omega$ , T.H.D. = 10%, $V_{CC} = 13.2 \text{ V}$
			11		W	$R_L = 2 \Omega$ , T.H.D. = 10%, $V_{CC} = 14.4 \text{ V}$
Total Harmonic Distortion	T.H.D.		0.1	1	%	$R_L = 4 \Omega$ , $P_O = 0.5 \text{ W}$ , $V_{CC} = 13.2 \text{ V}$
			0.4		%	$R_L = 2 \Omega$ , $P_O = 1 \text{ W}$ , $V_{CC} = 13.2 \text{ V}$
Voltage Gain	$A_V$	49	51.5	54	dB	$P_O = 0.5 \text{ W}$
Output Noise Level	$V_n$		1.4	4.0	mV	$R_O = 10 \text{ k}\Omega$

TEST CIRCUIT



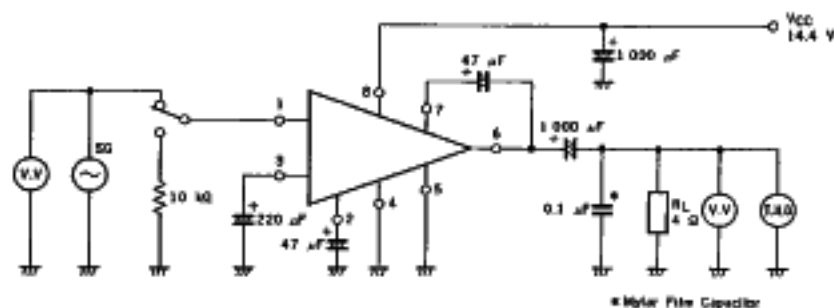


TYPICAL CHARACTERISTICS ( $T_a = 25^\circ\text{C}$ )


T-74-05-01

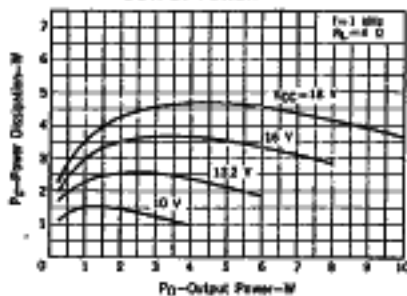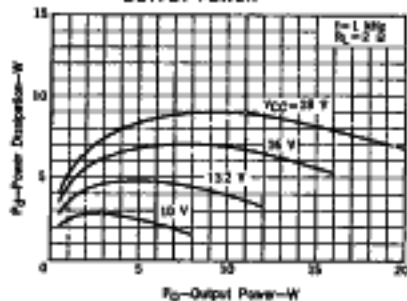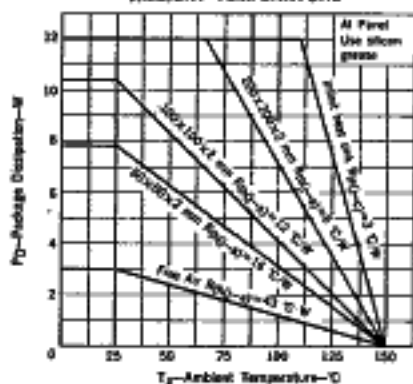POWER DISSIPATION vs.  
OUTPUT POWERPOWER DISSIPATION vs.  
OUTPUT POWERPACKAGE DISSIPATION vs.  
AMBIENT TEMPERATURE


VOLTAGE GAIN vs. FREQUENCY

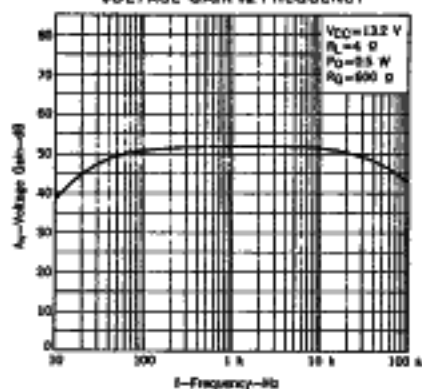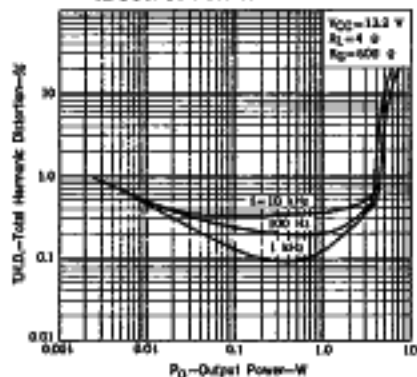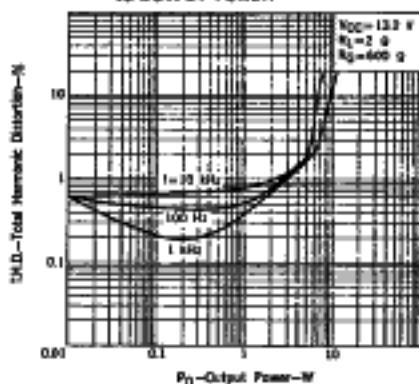TOTAL HARMONIC DISTORTION  
vs. OUTPUT POWERTOTAL HARMONIC DISTORTION  
vs. OUTPUT POWER


TOTAL HARMONIC DISTORTION  
vs. FREQUENCY

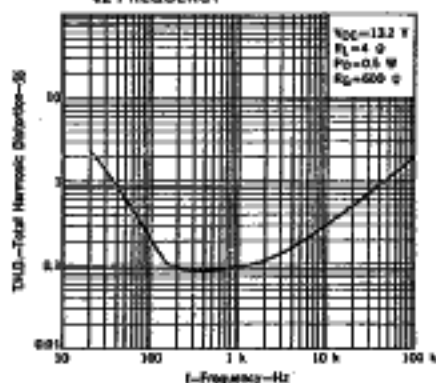


TOTAL HARMONIC DISTORTION  
vs. SIGNAL SOURCE RESISTANCE

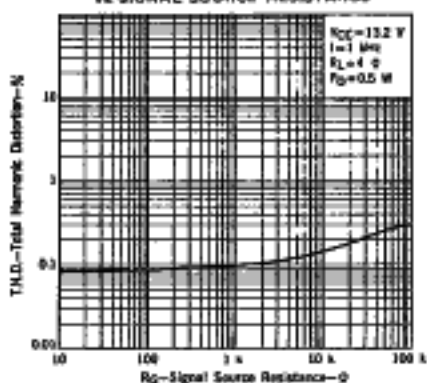


OUTPUT NOISE VOLTAGE vs.  
SIGNAL SOURCE RESISTANCE

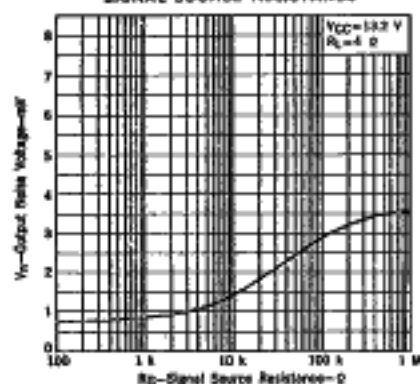


SUPPLY VOLTAGE REJECTION  
vs. RIPPLE FREQUENCY

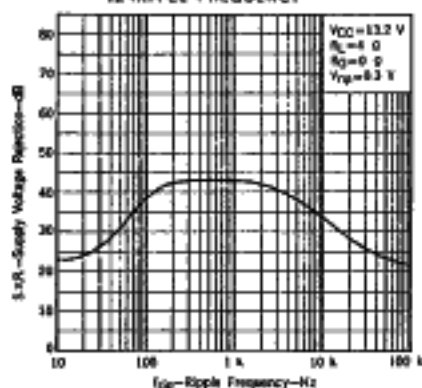


OUTPUT POWER vs.  
SUPPLY VOLTAGE

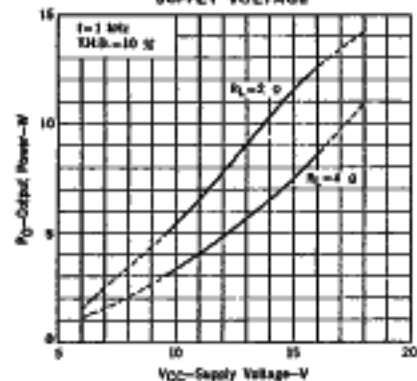

SUPPLY VOLTAGE CHARACTERISTICS

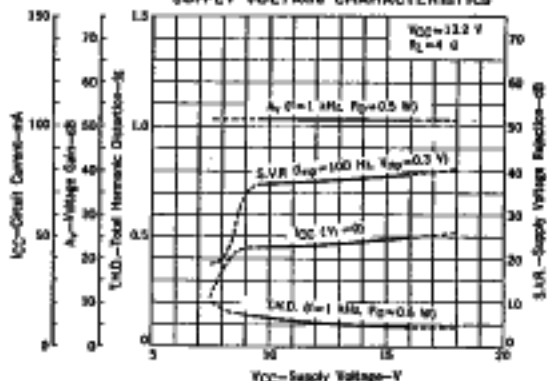

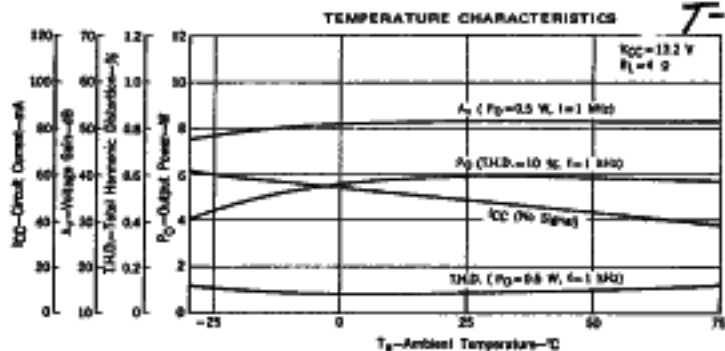

## TYPICAL APPLICATIONS

## (1) Circuit Example 1

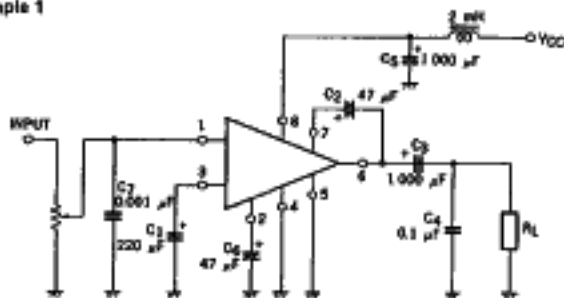


Fig. A

## (2) Circuit Example 2



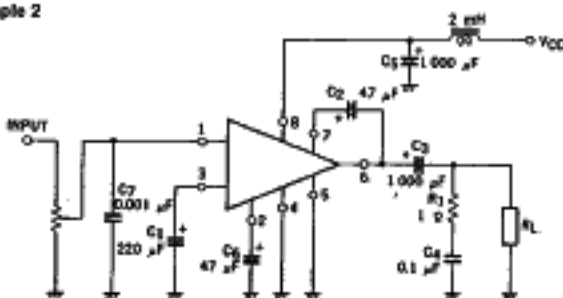


Fig. B

- The capacitor  $C_4$  is for preventing a parasitic oscillation. A mylar film capacitor is recommended. If an oscillation occur, increase capacitance of  $C_4$ , or connect an additional resistor  $R_1$  as shown in Fig. B.

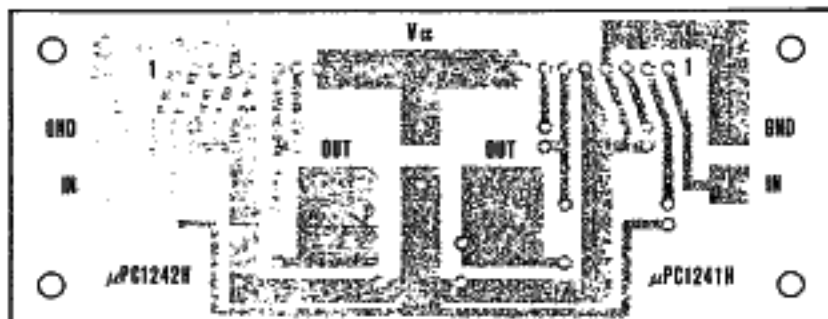

COMPONENTS LAYOUT FOR P.C. ASSEMBLY (Copper side)

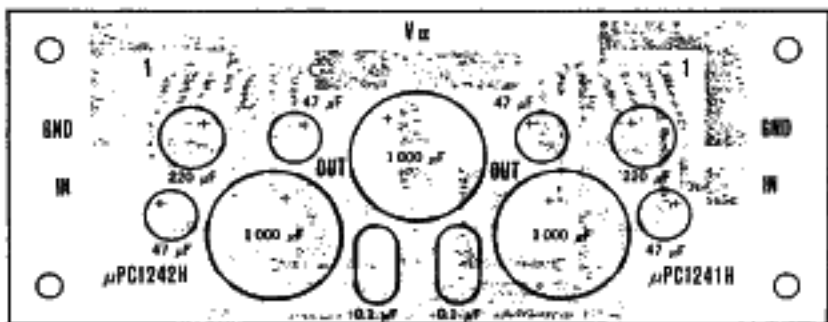

#### INSTRUCTION FOR USE

- How to attach to the heat sink.
  - Surely use the silicon grease.
  - Keep fastening torque for the screw in the range of 5 to 8 kg-m.
- Use TAB as floating or connect to output GND (pin #5).  
Do not use TAB for power supply GND.
- When this IC is unstable due to the high impedance of signal source, connect the capacitance  $C_T$  (around 0.001  $\mu$ F) between input (pin #1) and input GND (pin #4).