



# DATA SHEET

## SK52~S510


### SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER VOLTAGE- 20 to 100 Volts CURRENT- 5.0 Amperes

#### FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For surface mounted applications
- Low profile package
- Built-in strain relief
- Metal to silicon rectifier. majority carrier conduction
- Low power loss,high efficiency
- High surge capacity
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed: 260°C /10 seconds at terminals

#### MECHANICAL DATA

Case: JEDEC DO-214AB molded plastic  
 Terminals:Solder plated, solderable per MIL-STD-750, Method 2026  
 Polarity: Color band denotes positive end (cathode)  
 Standard packaging: 16mm tape (EIA-481)  
 Weight: 0.007 ounce, 0.21 gram

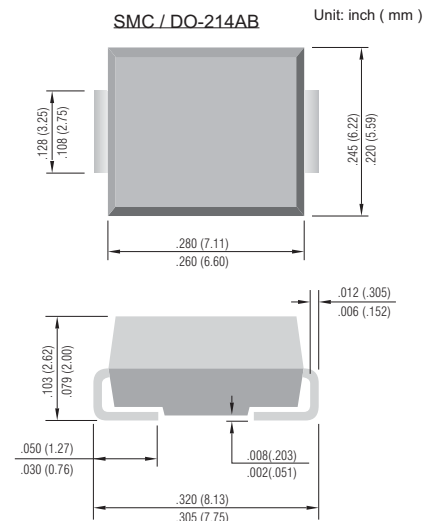

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


Ratings at 25°C ambient temperature unless otherwise specified.  
 Resistive or inductive load.

	SYMBOLS	SK52	SK53	SK54	SK55	SK56	SK58	SK59	S510	UNITS
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	20.0	30.0	40.0	50.0	60.0	80.0	90.0	100.0	V
Maximum RMS Voltage	V <sub>RMS</sub>	14.0	21.0	28.0	35.0	42.0	56.0	63.0	70.0	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	20.0	30.0	40.0	50.0	60.0	80.0	90.0	100.0	V
Maximum Average Forward Rectified Current at T <sub>L</sub> (See figure 1)	I(AV)	5.0								A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	100.0								A
Maximum Instantaneous Forward Voltage at 5.0A (Note 1)	V <sub>F</sub>	0.50		0.75		0.85				V
Maximum DC Reverse Current (Note 1) T <sub>a</sub> = 25°C at Rated DC Blocking Voltage T <sub>a</sub> =100°C	I <sub>R</sub>					0.5 20.0				mA
Maximum Thermal Resistance(Note 2)	R <sub>θJL</sub> R <sub>θJA</sub>					17.0 55.0				°C/W
Operating and Storage Temperature Range T <sub>J</sub>	T <sub>J</sub>	-50 to +125								°C
Storage Temperature Range	T <sub>STG</sub>	-55 to +150								°C


NOTES:  
 A.Pulse Test with PW =300µsec, 2% Duty Cycle.  
 B.Mounted on P.C. Board with 14mm<sup>2</sup> (.013mm thick) copper pad areas.




**RATING AND CHARACTERISTIC CURVES**

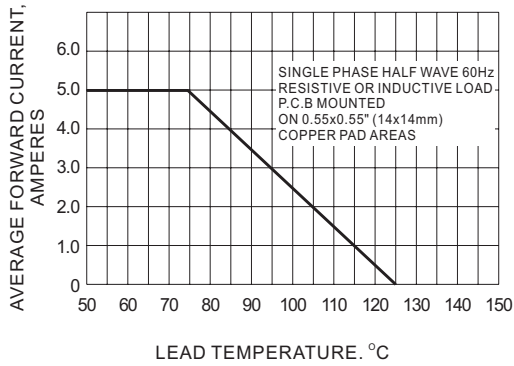


**Fig. 1- FORWARD CURRENT DERATING CURVE**

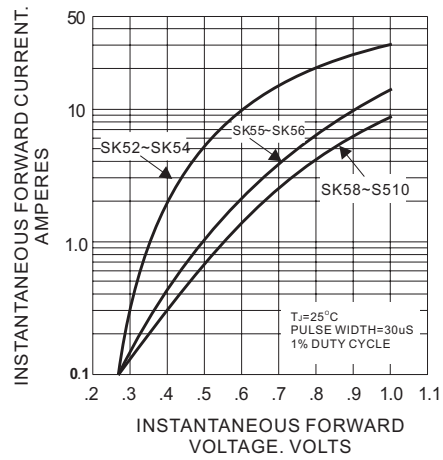


**Fig. 2- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

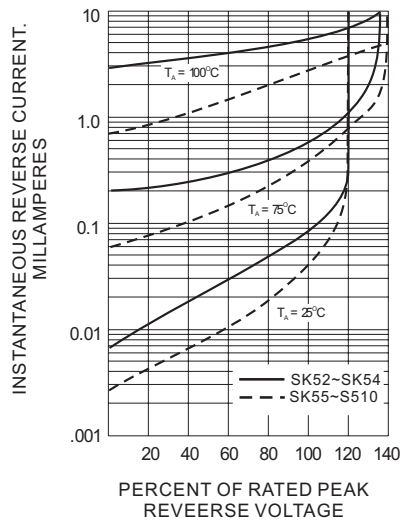

**Fig. 3- TYPICAL REVERSE CHARACTERISTICS**

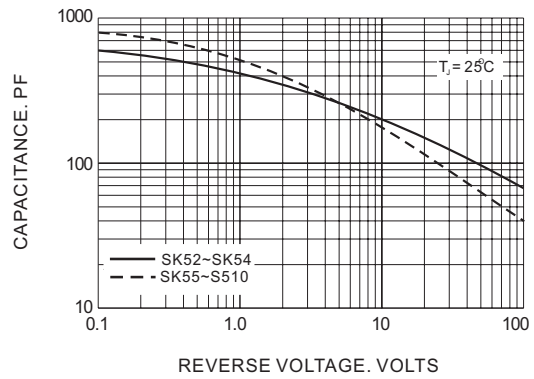

**Fig. 4- TYPICAL JUNCTION CAPACITANCE**

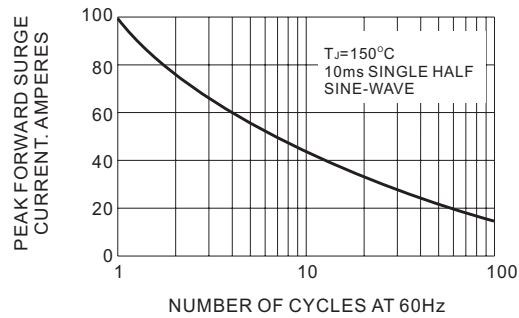

**Fig. 5- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**