


Features

- Single-in-Line Package (SIP)
- Isolated Single and Dual Output Models
- I/O-Isolation 3'000 VDC
- High Efficiency up to 81%
- Operating Temperature -40°C to + 85 °C
- Pin-compatible with other Manufacturers
- 100% Burn-in (8 h)
- 2 Year Product Warranty

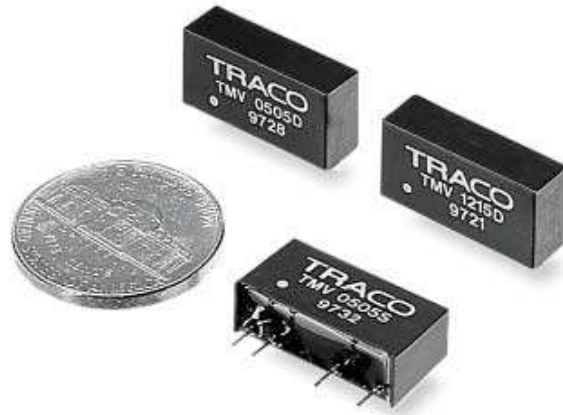

The TMV series are miniature, isolated 1 W DC/DC-converters with high isolation in a Single-in-Line package (SIP). Requiring only 1.2 cm² board space they offer the ideal solution in many space critical applications for board level power distribution. The use of SMD-technology makes it possible to offer a product with high performance at low cost.

Models				
Ordercode	Input voltage	Output voltage	Output current max.	Efficiency typ.
TMV 0505S TMV 0512S TMV 0515S TMV 0505D TMV 0512D TMV 0515D	5 VDC ±10%	5 VDC 12 VDC 15 VDC ± 5 VDC ±12 VDC ±15 VDC	200 mA 80 mA 65 mA ±100 mA ± 40 mA ± 30 mA	71 % 78 % 78 % 72 % 78 % 79 %
TMV 1205S TMV 1212S TMV 1215S TMV 1205D TMV 1212D TMV 1215D	12 VDC ±10%	5 VDC 12 VDC 15 VDC ± 5 VDC ±12 VDC ±15 VDC	200 mA 80 mA 65 mA ±100 mA ± 40 mA ± 30 mA	73 % 80 % 80 % 74 % 81 % 81 %
TMV 2405S TMV 2412S TMV 2415S TMV 2405D TMV 2412D TMV 2415D	24 VDC ±10%	5 VDC 12 VDC 15 VDC ± 5 VDC ±12 VDC ±15 VDC	200 mA 80 mA 65 mA ±100 mA ± 40 mA ± 30 mA	71 % 78 % 79 % 72 % 79 % 80 %

Input Specifications

Input current no load /full load	5 Vin models 12 Vin models 24 Vin models	30 mA / 260 mA typ. 12 mA / 110 mA typ. 7 mA / 50 mA typ.
Surge voltage (1 sec. max.)	5 Vin models 12 Vin models 24 Vin models	9 V max. 18 V max. 30 V max.
Reverse voltage protection		0.3 A max.
Reflected input ripple current*		can be reduced by ext. 1–3.3 µF polyester film capacitor
Input filter		internal capacitor

Output Specifications

Voltage set accuracy		± 3 %
Voltage balance (dual output models)		± 1 % max.
Regulation	– Input variation – Load variation 20 – 100 %	± 1.2 % / 1 % change Vin ± 10 % max.
Ripple and noise (20 MHz Bandwidth)		100 mV pk-pk max.
Temperature coefficient		± 0.02 % / °C
Short circuit protection		limited 1 sec. max.
Capacitive load	– Single output models – Dual output models	680 µF max. 220 µF max.

General Specifications


Temperature ranges	– Operating – Case temperature – Storage	–40 °C ... + 85 °C +95 °C max. –40 °C ... +105 °C
Humidity (non condensing)		95 % rel H max.
Reliability, calculated MTBF (MIL-HDBK-217 E)		>2'000'000 h @ 25 °C
Isolation voltage	Input/Output	3'000 VDC
Isolation capacity	Input/Output	60 pF typ.
Isolation resistance	Input/Output	>10'000 M Ohm
Switching frequency		100 kHz typ. (Frequency modulation)
Frequency change over line and load		± 30 % max.

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Physical Specifications

Case material	non conductive black plastic (flammability to UL 94-V0)
Package weight	- Single output models: 2.1 g (0.07 oz) - Dual output models: 2.6 g (0.09 oz)
Soldering temperature	max. 260°C / 10 sec

Outline Dimensions mm (inches)

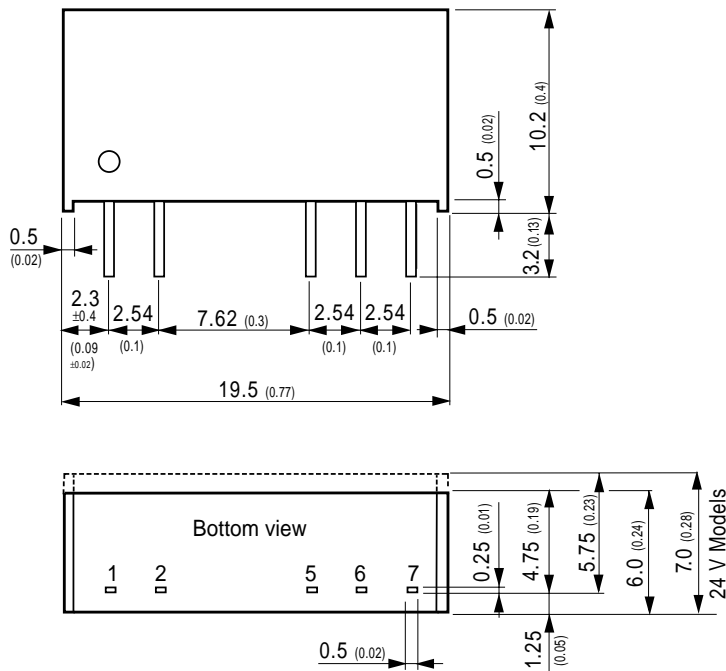

Pin-Out		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
5	-Vout	-Vout
6	No pin	Common
7	+Vout	+Vout

Tolerances ±0.25 (0.01)
pins ±0.05 (0.002)

Specifications can be changed without notice