


# POWER OVER ETHERNET (PoE) MAGNETICS

## 10/100BASE-TX VoIP Magnetics Modules

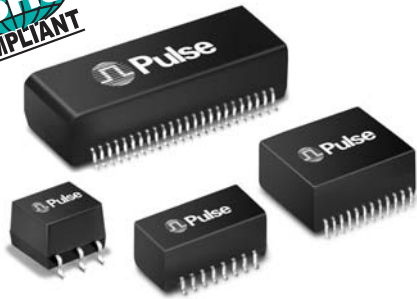

- RoHS-5 peak reflow temperature rating 235°C
- RoHS-6 peak reflow temperature rating 245°C
- IEEE 802.3af/ANSI X3.263 compliant performance
- Designed for IP phone or switch applications

### Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C

RoHS-6 <sup>4</sup> Compliant Part Number	RoHS-5 <sup>3</sup> Compliant Part Number	Ports	Insertion Loss (dB MAX)	Return Loss (dB MIN @ 100 Ω)				Differential to Common Mode Rejection (dB MIN)			Crosstalk (dB MIN)			Hipot (VRMS MIN)	DC Resistance Balance ≤ (%)
				1-100MHz	1-30MHz	40MHz	50MHz	60-80MHz	30MHz	60MHz	100MHz	30MHz	60MHz		
H1180NL <sup>2c</sup>	—	1	-1.2	-16	-14	-13	-12	-43	-37	-33	-45	-40	-35	1500	—
H1187NL <sup>2a</sup>	H1187	1	-1.2	-16	-14	-13	-12	-43	-37	-33	-45	-40	-35	1500	—
H1197NL <sup>2c</sup>	H1197	1	-1.2	-16	-14	-13	-12	-43	-37	-33	-45	-40	-35	1500	—
H2019NL <sup>2c</sup>	H2019	1	-1.2	-16	-14	-13	-12	-43	-37	-33	-45	-40	-35	1500	3.5
H2005ANL <sup>2c</sup>	H2005A	2	-1.2	-16	-14	-13	-12	-50	-43	-35	-43	-37	-33	1500	3.5
H2006ANL <sup>2d</sup>	H2006A	2	-1.2	-16	-14	-13	-12	-43	-37	-33	-43	-37	-31	1500	3.5
H2008NL <sup>2d</sup>	H2008	2	-1.2	-16	-14	-13	-12	-40	-35	-30	-43	-37	-33	1500	3.5
H2009NL <sup>2a</sup>	—	2	-1.1	-16	-14	-13	-12	-43	-37	-33	-43	-37	-33	1500	3.5
H2014NL <sup>2d</sup>	H2014	4	-1.2	-16	-14	-13	-12	-43	-37	-33	-45	-40	-35	1500	3.5
H2017NL <sup>2c</sup>	H2017	4	-1.2	-16	-14	-13	-12	-43	-37	-33	-45	-40	-35	1800	3.5
HX2019NL <sup>1,2a</sup>	HX2019	1	-1.4	-16	-14	-13	-12	—	—	—	-45	-40	-35	1500	3.5

- Extended operating temperature (-40°C to +85°C)
- MSL (Moisture Sensitivity Level): a = 1 b = 2 c = 3 d = 4 e = 5
- RoHS-5: Product does not contain 5 out of the 6 banned substances specified in the RoHS directive (product contains lead in applications considered solder).
- RoHS-6: Product does not contain 5 out of the 6 banned substances specified in the RoHS directive. Some internal connections may contain lead in high-temperature solder (solder alloys containing more than 85% lead).

NOTE: When ordering Tape & Reel packaging, add the suffix "T" to the end of the part number. For example: H2008NLT.

## Mechanicals

### H1180

**Weight** . . . . . 0.6 grams  
**Tape & Reel** . . . . . 500/reel  
**Tube** . . . . . 65/tube

### H1187

**Weight** . . . . . 0.6 grams  
**Tape & Reel** . . . . . 500/reel  
**Tube** . . . . . 70/tube

**Dimensions:**  $\frac{\text{Inches}}{\text{mm}}$  Unless otherwise specified, all tolerances are  $\pm \frac{.010}{0,25}$

# POWER OVER ETHERNET (PoE) MAGNETICS

## 10/100BASE-TX VoIP Magnetics Modules



### Mechanicals

#### H1197

**Weight** . . . . . 2.8 grams  
**Tape & Reel** . . . . . 600/reel  
**Tube** . . . . . 45/tube

#### H2019, HX2019

**Weight** . . . . . 1.0 grams  
**Tape & Reel** . . . . . 600/reel  
**Tube** . . . . . 45/tube

**Dimensions:**  $\frac{\text{Inches}}{\text{mm}}$  Unless otherwise specified, all tolerances are  $\pm \frac{.010}{0,25}$

#### H2005A

**Weight** . . . . . 2.7 grams  
**Tape & Reel** . . . . . 300/reel  
**Tube** . . . . . 25/tube

#### H2006A, H2008

**Weight** . . . . . 2.4 grams  
**Tape & Reel** . . . . . 350/reel  
**Tube** . . . . . 35/tube

**Dimensions:**  $\frac{\text{Inches}}{\text{mm}}$  Unless otherwise specified, all tolerances are  $\pm \frac{.010}{0,25}$

Downloaded from [Elcodis.com](http://Elcodis.com) electronic components distributor


# POWER OVER ETHERNET (PoE) MAGNETICS

## 10/100BASE-TX VoIP Magnetics Modules



### Mechanicals (continued)


#### H2009

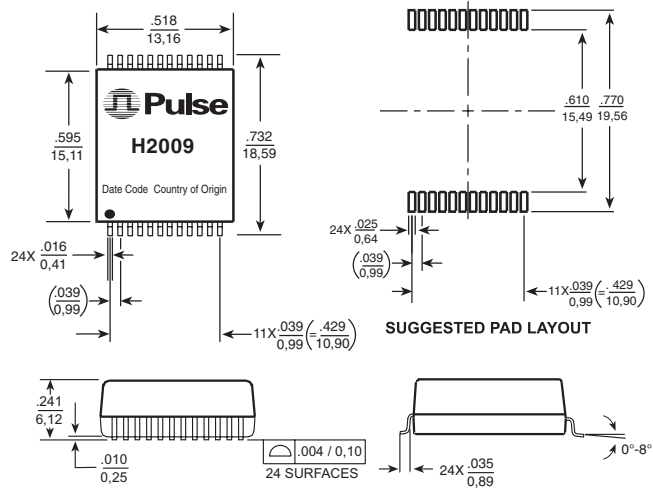

**Dimensions:** Inches  
mm  
Unless otherwise specified,  
all tolerances are  $\pm \frac{.010}{0.25}$

**Weight** . . . . . 1.6 grams  
**Tape & Reel** . . . . . 300/reel  
**Tube** . . . . . 35/tube

#### H2014, H2017

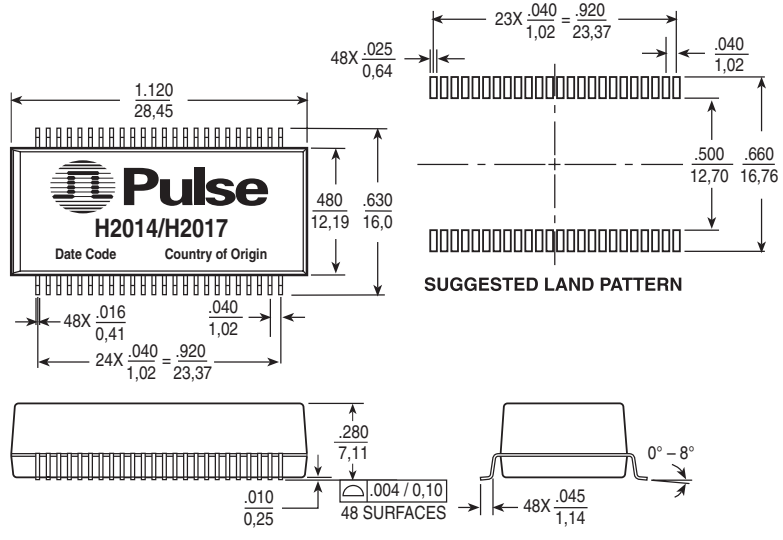


**Dimensions:** Inches  
mm  
Unless otherwise specified,  
all tolerances are  $\pm \frac{.010}{0.25}$


**Weight** . . . . . 5.0 grams  
**Tape & Reel** . . . . . 250 /reel  
**Tube** . . . . . 15/tube

### Schematics


#### H1180, H1187



#### H1197



#### H2019, HX2019

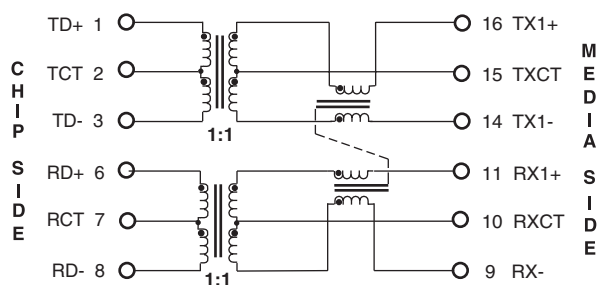


Downloaded from Elcodis.com electronic components distributor

# POWER OVER ETHERNET (PoE) MAGNETICS

## 10/100BASE-TX VoIP Magnetics Modules



### Schematics (continued)

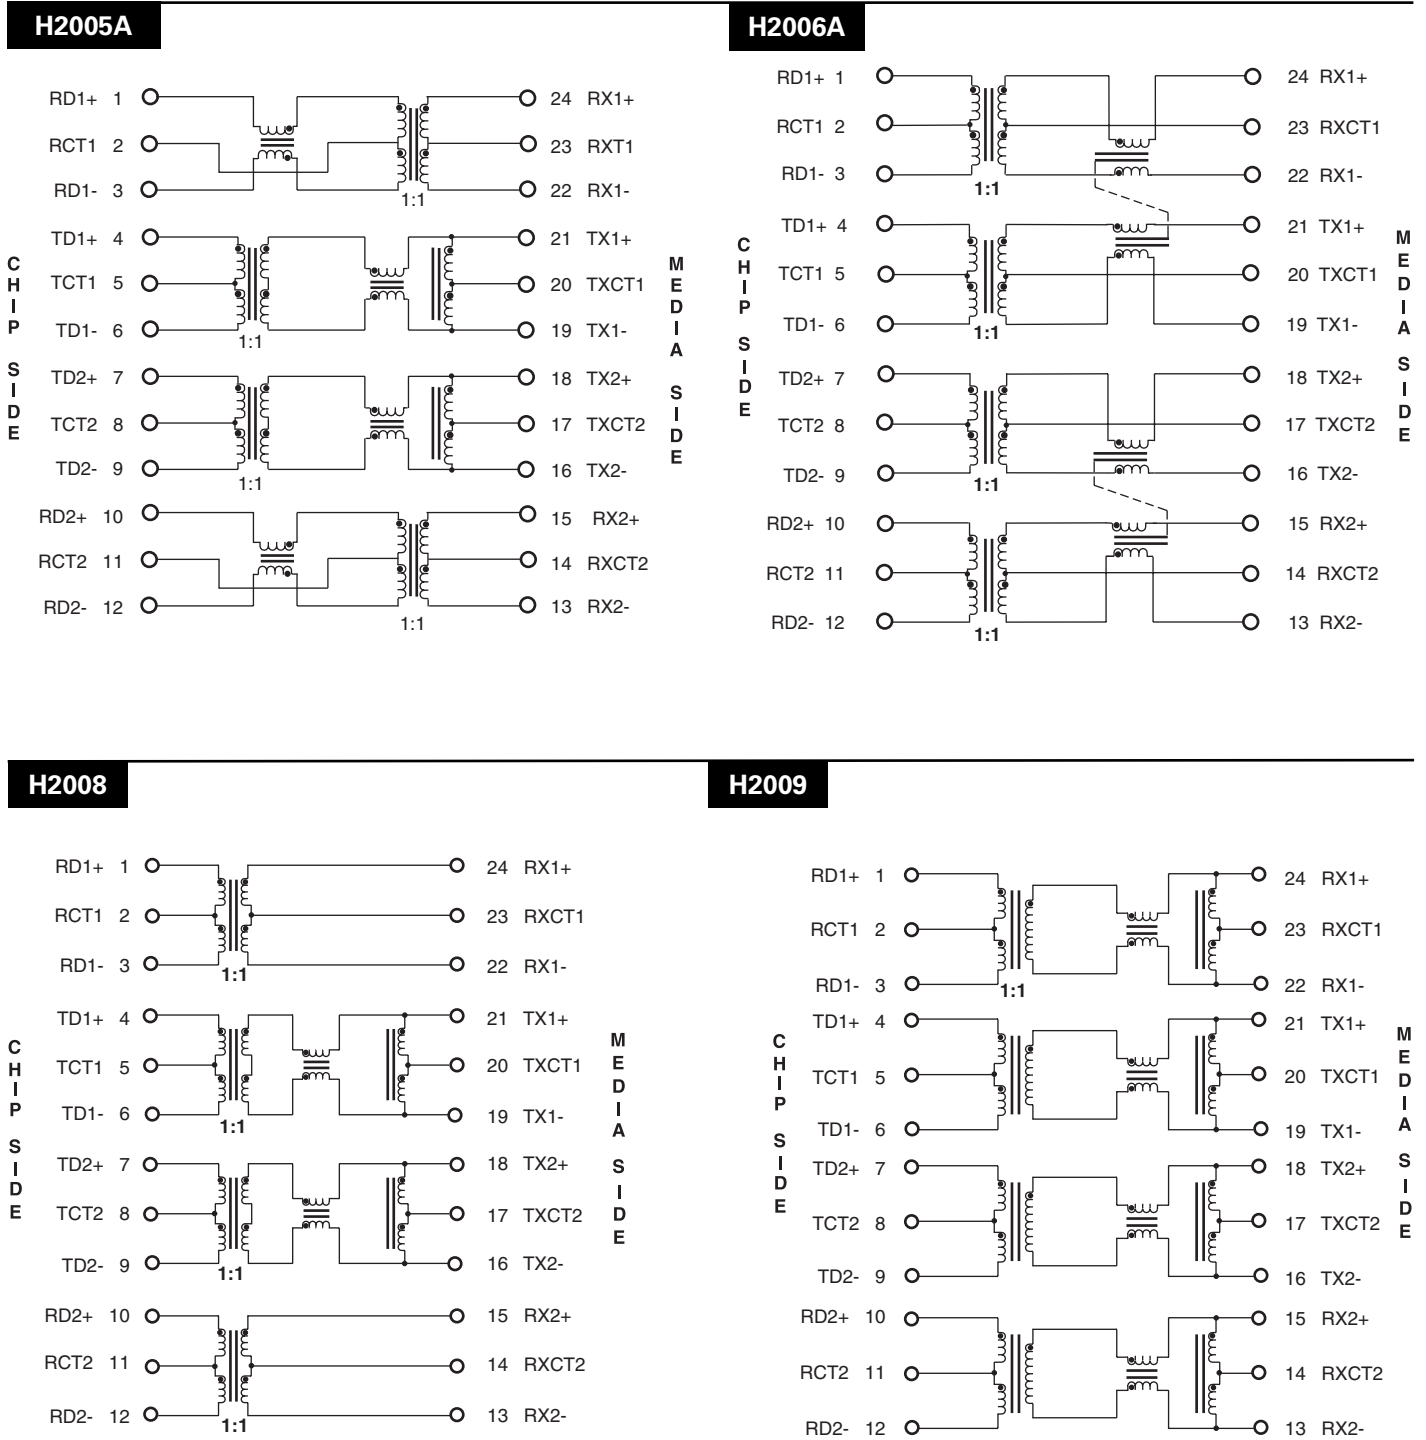

Downloaded from [Elcodis.com](http://Elcodis.com) electronic components distributor


# POWER OVER ETHERNET (PoE) MAGNETICS

## 10/100BASE-TX VoIP Magnetics Modules




### Schematics (continued)

**H2014**

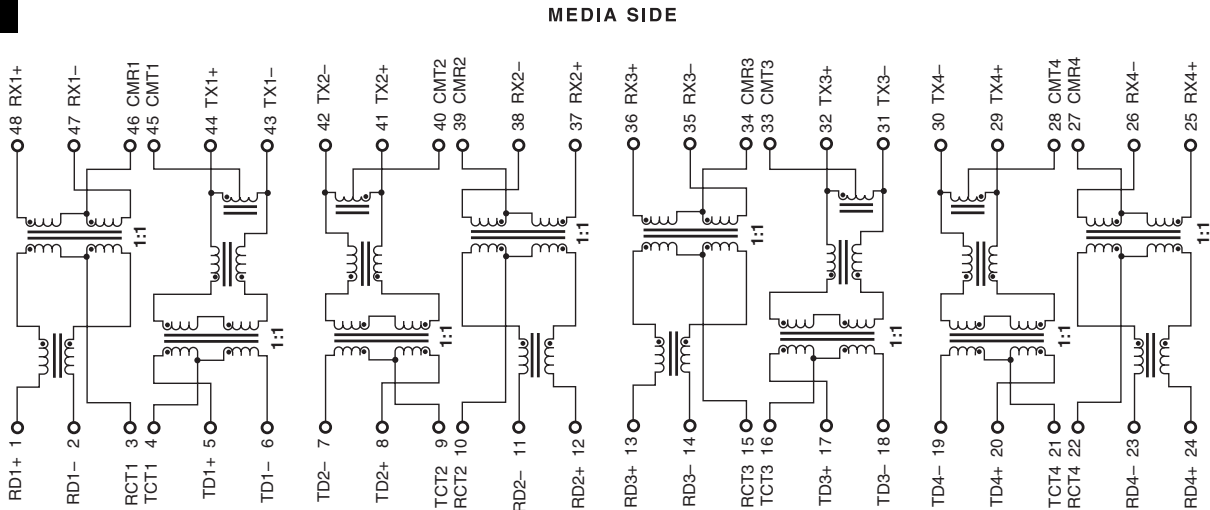

**CHIP SIDE**

**H2017**

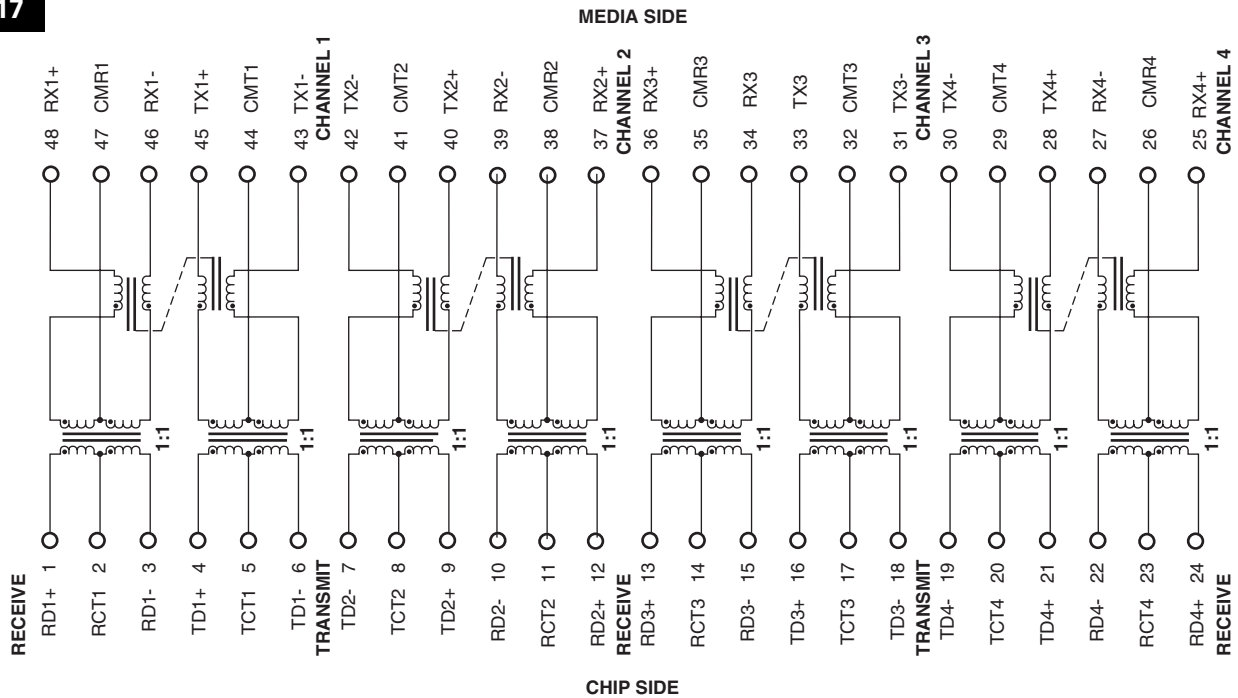

### For More Information:

Pulse Worldwide Headquarters	Pulse Europe	Pulse China Headquarters	Pulse North China	Pulse South Asia	Pulse North Asia
12220 World Trade Dr. San Diego, CA 92128 U.S.A.	Einsteinstrasse 1 D-71083 Herrenberg Germany	B402, Shenzhen Academy of Aerospace Technology Bldg. 10th Kejianan Rd. High-Tech Zone Nanshan District Shenzhen, PR China 518057	Room 1503 XinYin Building No. 888 YiShan Rd. Shanghai 200233 China	150 Kampong Ampat #07-01/02 KA Centre Singapore 368324	No. 26, Kao Ching Rd. Yang Mei Chen Taoyuan Hsien Taiwan R. O. C.
Tel: 858 674 8100 Fax: 858 674 8262	Tel: 49 7032 7806 0 Fax: 49 7032 7806 135	TEL: 86 755 33966678 FAX: 86 755 33966700	Tel: 86 21 54643211/2 Fax: 86 21 54643210	Tel: 65 6287 8998 Fax: 65 6280 0080	Tel: 886 3 4643715 Fax: 886 3 4641911

[www.pulseeng.com](http://www.pulseeng.com)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2008. Pulse Engineering, Inc. All rights reserved.

[www.pulseeng.com](http://www.pulseeng.com)