




Features

- ◇ For surface mounted application
- ◇ Low-Profile Package
- ◇ Ideal for automated pick & place
- ◇ Low power loss, high efficiency
- ◇ High current capability, low VF
- ◇ High surge current capability
- ◇ Plastic material used carries Underwriters Laboratory Classification 94V-0
- ◇ Epitaxial construction
- ◇ High temperature soldering:
260°C / 10 seconds at terminals

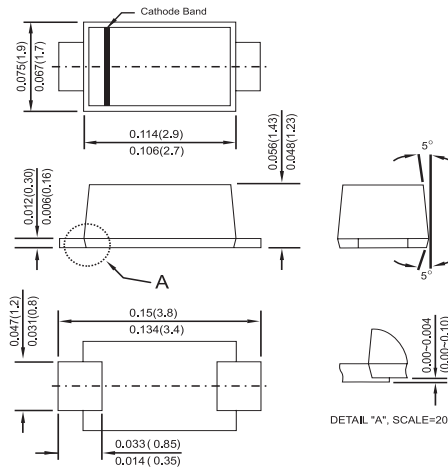

Mechanical Data

- ◇ Cases: Sub SMA plastic case
- ◇ Terminal : Pure tin plated, lead free.
- ◇ Polarity: Color band denotes cathode end
- ◇ Packaging: 12mm tape per EIA STD RS-481
- ◇ Weight approx. 15mg

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, de-rate current by 20%

Type Number	Symbol	SS 22L	SS 23L	SS 24L	SS 25L	SS 26L	SS 29L	SS 210L	SS 215L	Units	
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	90	100	150	V	
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	63	70	105	V	
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	90	100	150	V	
Marking Code (Note 4)		22LYM	23LYM	24LYM	25LYM	26LYM	29LYM	20LYM	2ALYM		
Maximum Average Forward Rectified Current at T_L (See Fig. 1)	$I_{(AV)}$	2.0								A	
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	50								A	
Maximum Instantaneous Forward Voltage (Note 1) @ 2.0A	V_F	0.5			0.70		0.85	0.95		V	
Maximum DC Reverse Current @ $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A=125^\circ\text{C}$	I_R	0.4					0.1				mA mA
		15			10		5				
Typical Junction Capacitance (Note 3)	C_j	130								pF	
Typical Thermal Resistance (Note 2)	$R_{\theta JL}$	17								$^\circ\text{C/W}$	
	$R_{\theta JA}$	75									
Operating Temperature Range	T_J	-65 to +125			-65 to +150					$^\circ\text{C}$	
Storage Temperature Range	T_{STG}	-65 to +150								$^\circ\text{C}$	

- Notes:
1. Pulse Test with PW=300 usec, 1% Duty Cycle
 2. Measured on P.C.Board with 0.2" x 0.2" (5mm x 5mm) Copper Pad Areas.
 3. Measured at 1 MHz and Applied Reverse Voltage of 4.0V D.C.
 4. 22LYM: 2=2A, 2-20V, L-Low Profile, Y-Year Code, M-Month Code.

RATINGS AND CHARACTERISTIC CURVES (SS22L THRU SS215L)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

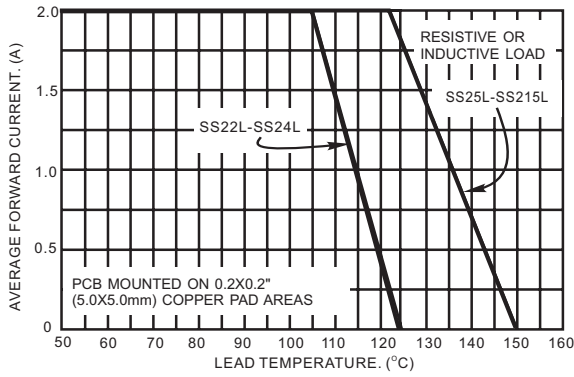


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

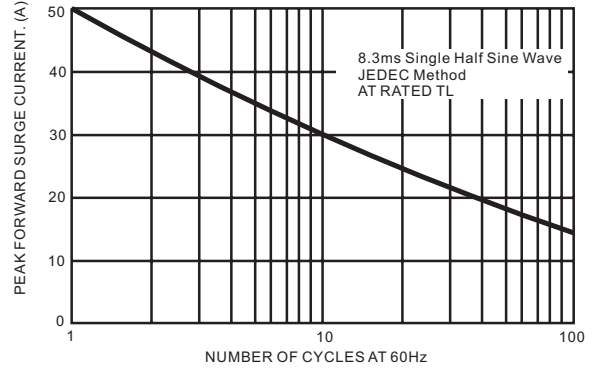


FIG.3- TYPICAL FORWARD CHARACTERISTICS

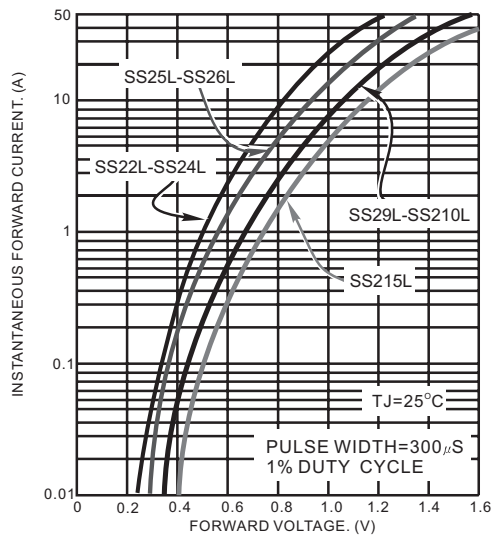


FIG.4- TYPICAL REVERSE CHARACTERISTICS

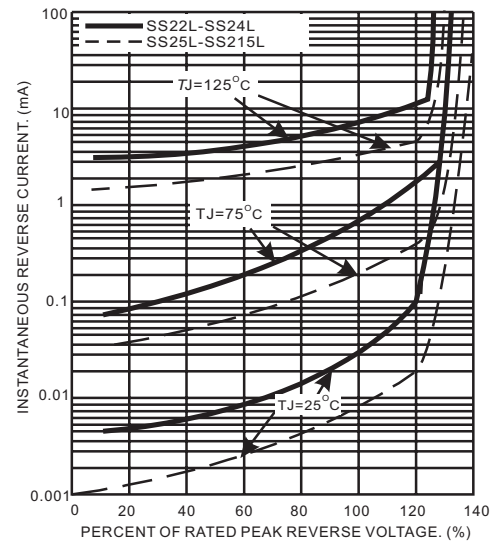


FIG.5- TYPICAL JUNCTION CAPACITANCE

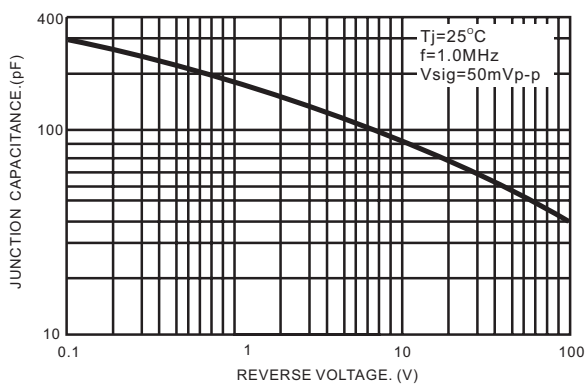


FIG.6- TYPICAL TRANSIENT THERMAL CHARACTERISTICS

