



DATA SHEET

SK52~S510


SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER
VOLTAGE- 20 to 100 Volts CURRENT- 5.0 Amperes

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For surface mounted applications
- Low profile package
- Built-in strain relief
- Metal to silicon rectifier. majority carrier conduction
- Low power loss,high efficiency
- High surge capacity
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed: 260°C /10 seconds at terminals

MECHANICAL DATA

Case: JEDEC DO-214AB molded plastic
 Terminals:Solder plated, solderable per MIL-STD-750, Method 2026
 Polarity: Color band denotes positive end (cathode)
 Standard packaging: 16mm tape (EIA-481)
 Weight: 0.007 ounce, 0.21 gram

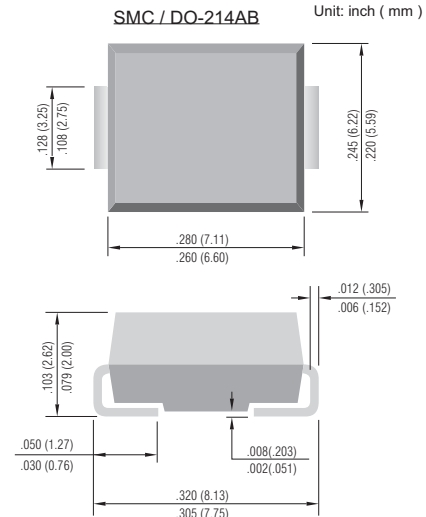

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
 Resistive or inductive load.

	SYMBOLS	SK52	SK53	SK54	SK55	SK56	SK58	SK59	S510	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	20.0	30.0	40.0	50.0	60.0	80.0	90.0	100.0	V
Maximum RMS Voltage	V _{RMS}	14.0	21.0	28.0	35.0	42.0	56.0	63.0	70.0	V
Maximum DC Blocking Voltage	V _{DC}	20.0	30.0	40.0	50.0	60.0	80.0	90.0	100.0	V
Maximum Average Forward Rectified Current at T _L (See figure 1)	I(AV)	5.0								A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	100.0								A
Maximum Instantaneous Forward Voltage at 5.0A (Note 1)	V _F	0.50		0.75		0.85				V
Maximum DC Reverse Current (Note 1) T _a = 25°C at Rated DC Blocking Voltage T _a =100°C	I _R					0.5 20.0				mA
Maximum Thermal Resistance(Note 2)	R _{θJL} R _{θJA}					17.0 55.0				°C/W
Operating and Storage Temperature Range T _J	T _J	-50 to +125								°C
Storage Temperature Range	T _{STG}	-55 to +150								°C

NOTES:

- A.Pulse Test with PW =300µsec, 2% Duty Cycle.
- B.Mounted on P.C. Board with 14mm² (.013mm thick) copper pad areas.



RATING AND CHARACTERISTIC CURVES

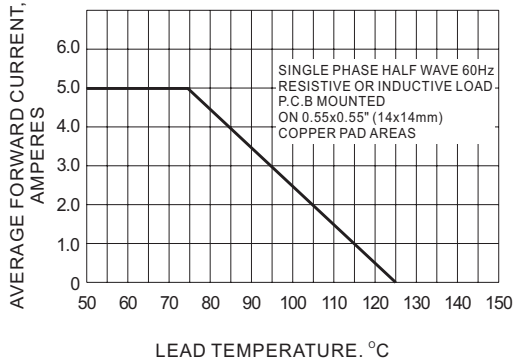


Fig. 1- FORWARD CURRENT DERATING CURVE

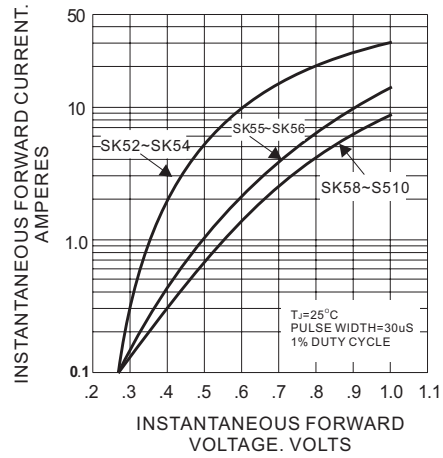


Fig. 2- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

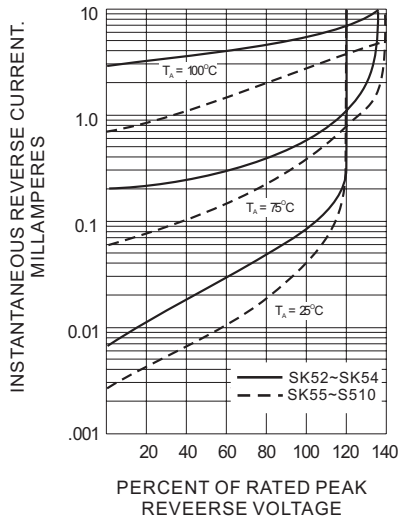


Fig. 3- TYPICAL REVERSE CHARACTERISTICS

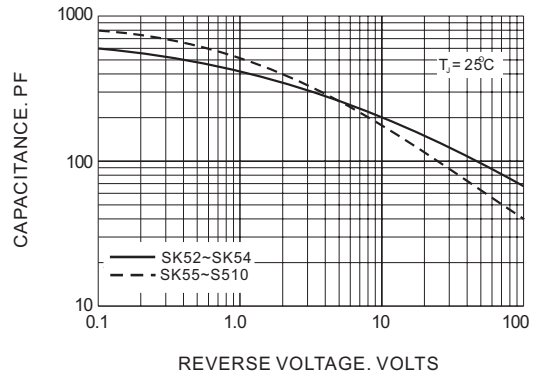


Fig. 4- TYPICAL JUNCTION CAPACITANCE

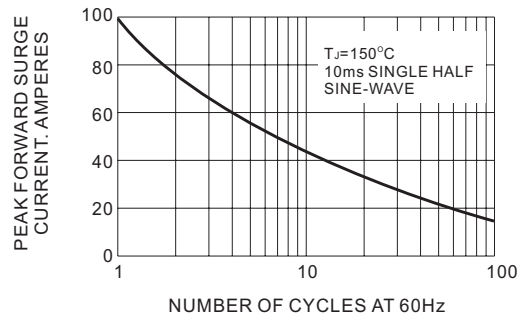


Fig. 5- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT