


Schottky Power Surface Mount FST80SM1-SM6 Series

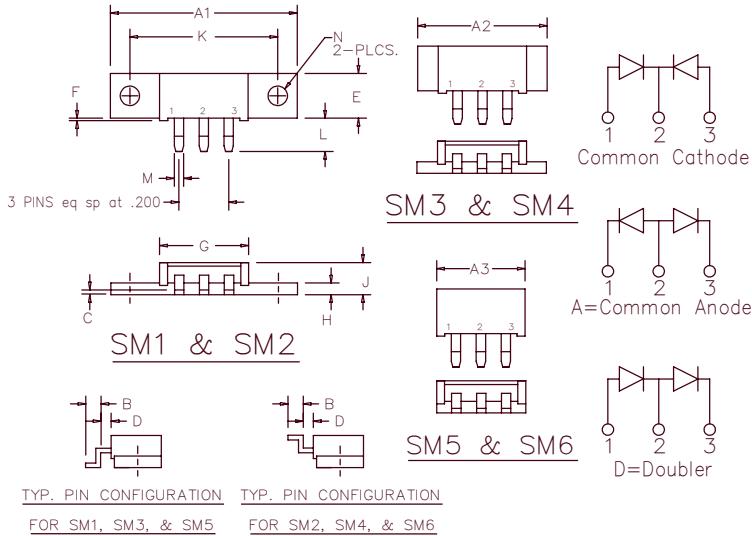

	Dim. Inches		Millimeter	
	Minimum	Maximum	Minimum	Maximum Notes
A1	1.490	1.510	37.85	38.35
A2	1.020	1.040	26.12	26.42
A3	.695	.715	17.65	18.16
B	.110	.120	2.79	3.04
C	.027	.037	0.69	0.94
D	.100	.110	2.54	2.79
E	.350	.370	8.89	9.40
F	.015	.025	0.38	0.64
G	.695	.715	17.65	18.16
H	.088	.098	2.24	2.49
J	.240	.260	6.10	6.60
K	1.180	1.195	29.97	30.35
L	.230	.250	5.84	6.35
M	.065	.085	1.65	2.16
N	.151	.161	3.84	4.09 Dia.

Note: Baseplate Common with Pin 2

Microsemi Catalog Catalog Number	Industry Part Number	Working Reverse Voltage	Peak Reverse Voltage	Repetitive Peak Reverse Voltage
FST8035SM <u>①</u> <u>②</u>	81CNQ035ASL 81CNQ035ASM	35V	35V	
FST8040SM _ _	81CNQ040ASL 81CNQ040ASM	40V	40V	
FST8045SM _ _	81CNQ045ASL 81CNQ045ASM	45V	45V	
FST8050SM _ _		50V	50V	

Note: ① Specify (1-6) to identify package desired

② Specify C—Common Cathode, A—Common Anode, D—Doubler

- Schottky Barrier Rectifier
- Guard Ring Protection
- 2 X 40 Amperes Avg.
- 175°C Junction Temperature
- Reverse Energy Tested
- V_{RRM} – 35 to 50 Volts
- ROHS Compliant

Electrical Characteristics

Average forward current per pkg	$I_F(AV)$ 80 Amps	$T_C = 145^\circ\text{C}$, Square wave, $R_{\theta JC} = 0.5^\circ\text{C}/\text{W}$
Average forward current per leg	$I_F(AV)$ 40 Amps	$T_C = 145^\circ\text{C}$, Square wave, $R_{\theta JC} = 1.0^\circ\text{C}/\text{W}$
Maximum surge current per leg	I_{FSM} 800 Amps	8.3 ms, half sine, $T_J = 175^\circ\text{C}$
Max repetitive peak reverse current per leg	$ I_R(OV) $ 2 Amps	$f = 1 \text{ KHZ}, 25^\circ\text{C}, 1 \mu\text{sec square wave}$
Max peak forward voltage per leg	V_{FM} 0.49 volts	$ I_{FM} = 40\text{A}: T_J = 175^\circ\text{C}^*$
Max peak forward voltage per leg	V_{FM} 0.68 volts	$ I_{FM} = 40\text{A}: T_J = 25^\circ\text{C}^*$
Max peak reverse current per leg	$ I_{RM} $ 50 mA	$V_{RRM}, T_C = 125^\circ\text{C}^*$
Max peak reverse current per leg	$ I_{RM} $ 2.0 mA	$V_{RRM}, T_J = 25^\circ\text{C}$
Typical junction capacitance per leg	C_J 1900 pF	$V_R = 5.0\text{V}, T_C = 25^\circ\text{C}$

*Pulse test: Pulse width 300 μsec , Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T_{STG}	-55°C to 175°C
Operating junction temp range	T_J	-55°C to 175°C
Max thermal resistance per leg	$R_{\theta JC}$	1.0°C/W Junction to case
Max thermal resistance per pkg.	$R_{\theta JC}$	0.5°C/W Junction to case
Typical thermal resistance (greased)	$R_{\theta CS}$	0.3°C/W Case to sink
Mounting Base Torque		10 inch pounds maximum (SM1, 2)
Weight		SM1-2 0.3 ounce (8.4 grams) typical SM3-4 0.24 ounce (6.7 grams) typical SM5-6 0.18 ounce (5.2 grams) typical

FST80SM1 – FST80SM6

Figure 1
Typical Forward Characteristics – Per Leg

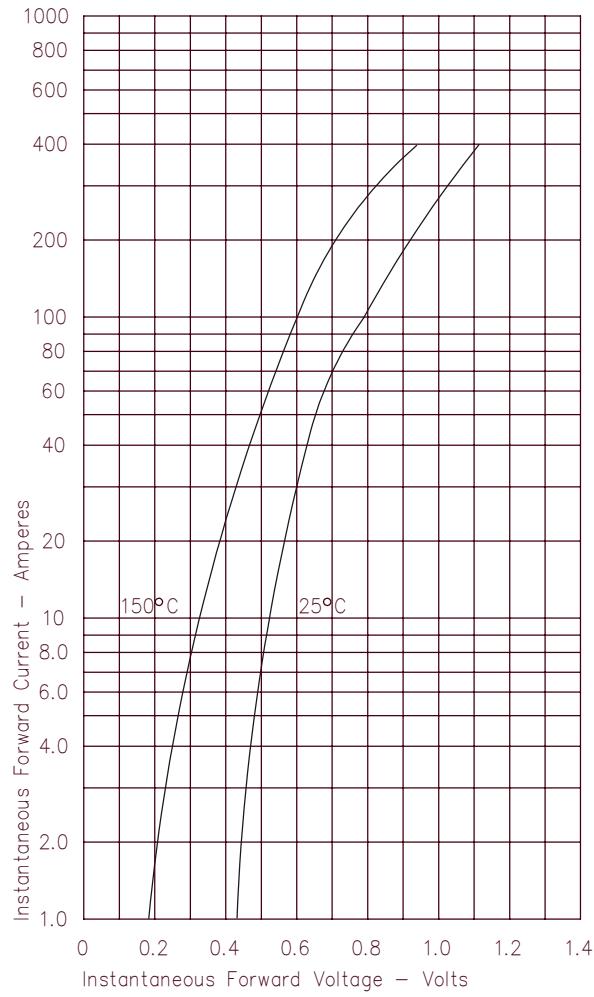


Figure 2
Typical Reverse Characteristics – Per Leg

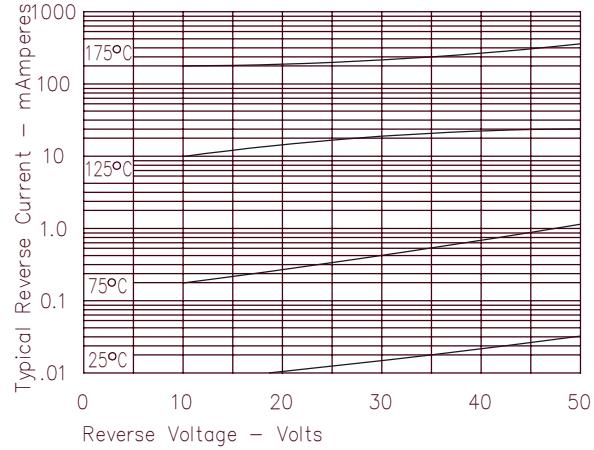


Figure 3
Typical Junction Capacitance – Per Leg

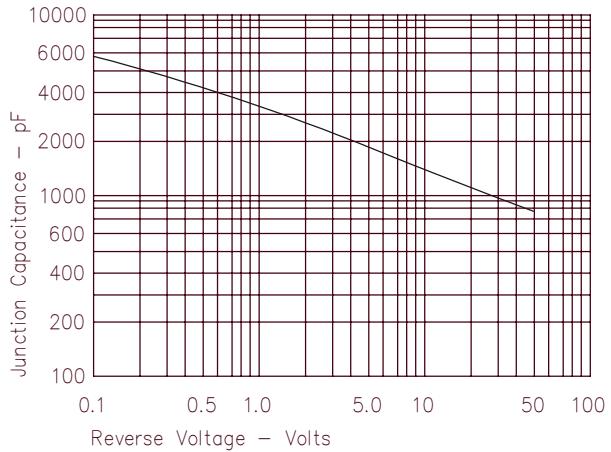


Figure 4
Forward Current Derating – Per Leg

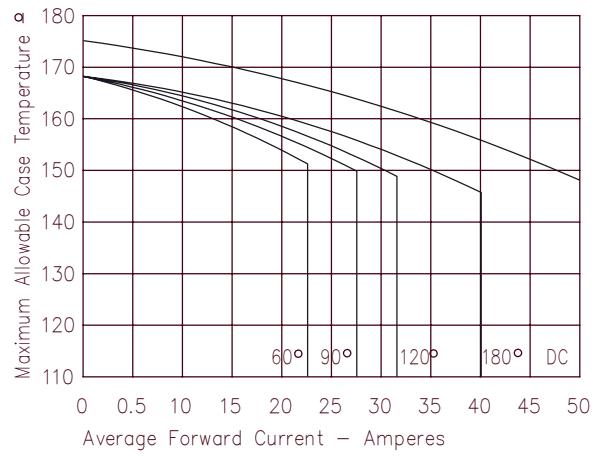


Figure 5
Maximum Forward Power Dissipation – Per Leg

