


International
IR Rectifier

123NQ100PbF

SCHOTTKY RECTIFIER

120Amp



Major Ratings and Characteristics

Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform	120	A
V_{RRM}	100	V
I_{FSM} @ $t_p = 5 \mu s$ sine	12800	A
V_F @ 120Apk, $T_J = 125^\circ C$	0.73	V
T_J range	-55 to 175	$^\circ C$

Description/ Features

The 123NQ.. high current Schottky rectifier module series has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 175 $^\circ C$ junction temperature. Typical applications are in high current switching power supplies, plating power supplies, UPS systems, converters, free-wheeling diodes, welding, and reverse battery protection.

- 175 $^\circ C$ T_J operation
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Lead-Free

Case Styles



HALF-PAK (D-67)

Voltage Ratings

Part number	123NQ100PbF
V_R Max. DC Reverse Voltage (V)	100
V_{RWM} Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

Parameters	123NQ	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current * See Fig. 5	120	A	50% duty cycle @ $T_C = 133^\circ\text{C}$, rectangular wave form
I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current * See Fig. 7	12800	A	Following any rated load condition and with rated V_{RWM} applied
	1800		
E_{AS} Non-Repetitive Avalanche Energy	15	mJ	$T_J = 25^\circ\text{C}$, $I_{AS} = 5.5$ Amps, $L = 1$ mH
I_{AR} Repetitive Avalanche Current	1	A	Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical

Electrical Specifications

Parameters	123NQ	Units	Conditions	
V_{FM} Max. Forward Voltage Drop * See Fig. 1 (1)	0.91	V	@ 120A	$T_J = 25^\circ\text{C}$
	1.26	V	@ 240A	
	0.73	V	@ 120A	$T_J = 125^\circ\text{C}$
	0.9	V	@ 240A	
I_{RM} Max. Reverse Leakage Current * See Fig. 2	3	mA	$T_J = 25^\circ\text{C}$	$V_R = \text{rated } V_R$
	40	mA	$T_J = 125^\circ\text{C}$	
C_T Max. Junction Capacitance	2650	pF	$V_R = 5V_{DC}$ (test signal range 100Khz to 1Mhz) 25°C	
L_S Typical Series Inductance	7.0	nH	From top of terminal hole to mounting plane	
dv/dt Max. Voltage Rate of Change (Rated V_R)	10000	V/ μs		

(1) Pulse Width 500 μs

Thermal-Mechanical Specifications

Parameters	123NQ	Units	Conditions	
T_J Max. Junction Temperature Range	-55 to 175	$^\circ\text{C}$		
T_{stg} Max. Storage Temperature Range	-55 to 175	$^\circ\text{C}$		
R_{thJC} Max. Thermal Resistance Junction to Case	0.38	$^\circ\text{C}/\text{W}$	DC operation * See Fig. 4	
R_{thCS} Typical Thermal Resistance, Case to Heatsink	0.05	$^\circ\text{C}/\text{W}$	Mounting surface, smooth and greased	
wt Approximate Weight	30 (1.06)	g (oz.)		
T Mounting Torque	Min.	3 (26.5)	Non-lubricated threads	
	Max.	4 (35.4)		
	Terminal Torque	Min.		3.4 (30)
		Max.		5 (44.2)
Case Style	HALF PAK Module			

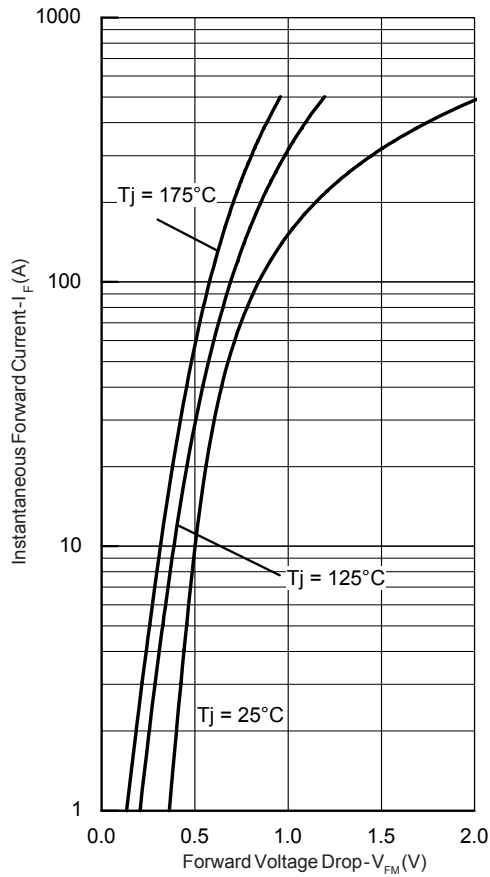


Fig. 1 - Max. Forward Voltage Drop Characteristics

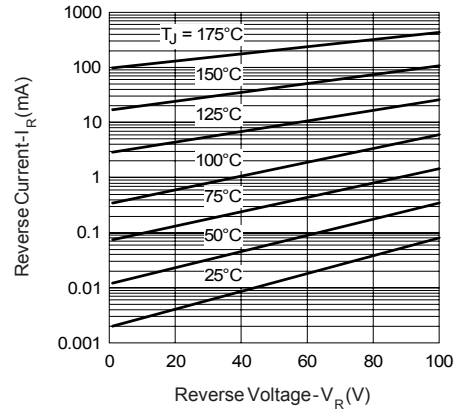


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage

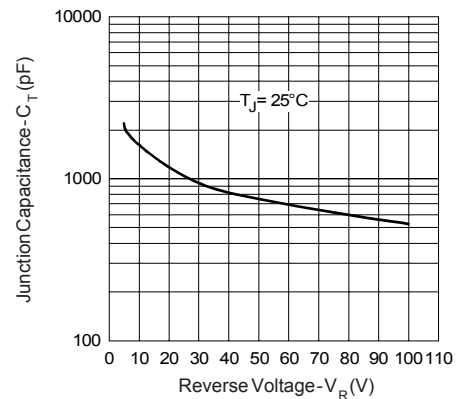


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

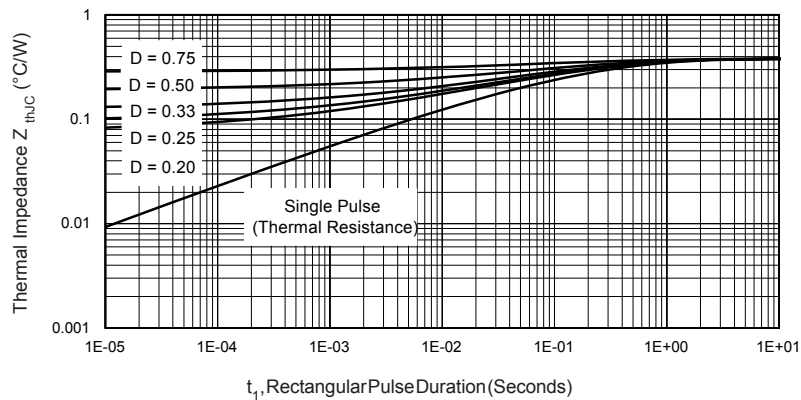


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics

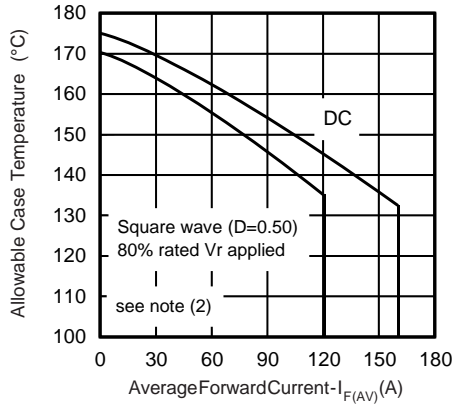


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current

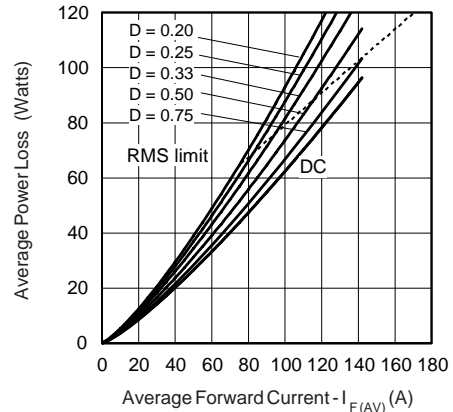


Fig. 6 - Forward Power Loss Characteristics

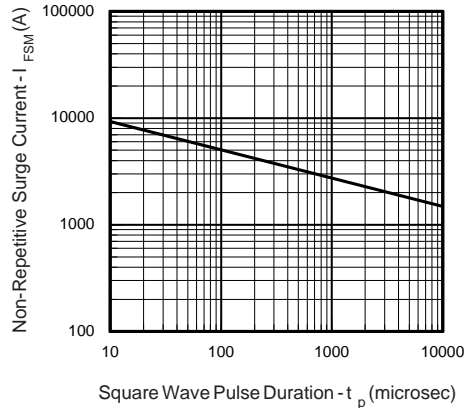


Fig. 7 - Max. Non-Repetitive Surge Current

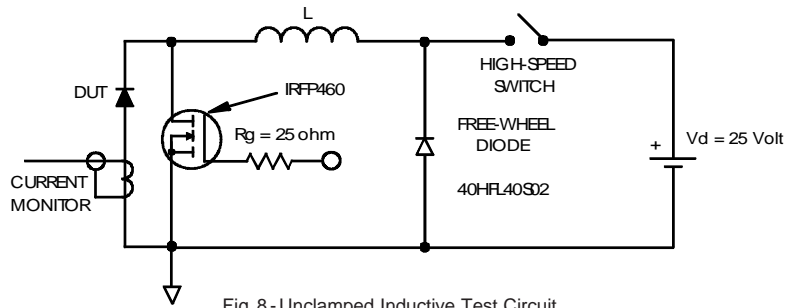



Fig. 8 - Unclamped Inductive Test Circuit

(2) Formula used: $T_c = T_j - (P_d + P_{d_{REV}}) \times R_{thJC}$

$P_d = \text{Forward Power Loss} = I_{F(AV)} \times V_{FM} @ (I_{F(AV)}/D)$ (see Fig. 6);

$P_{d_{REV}} = \text{Inverse Power Loss} = V_{R1} \times I_R (1-D)$; $I_R @ V_{R1} = \text{rated } V_R$

Outline Table

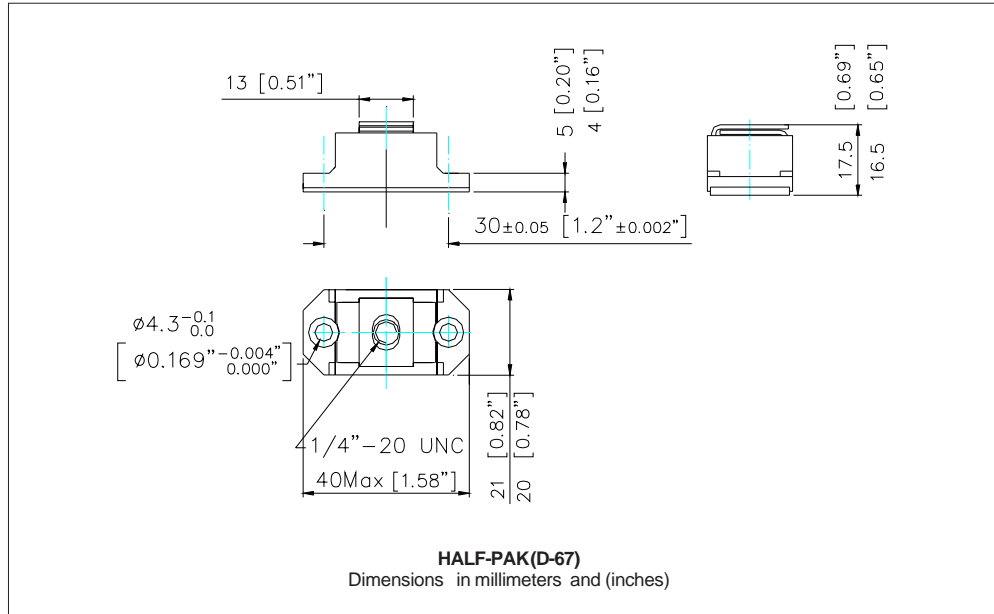

Ordering Information Table

Device Code	12	3	N	Q	100	PbF
	①	②	③	④	⑤	⑥
	1	-	Average Current Rating (x 10)	2	-	Product Silicon Identification
	3	-	N = Not Isolated	4	-	Q = Schottky Rectifier Diode
	5	-	Voltage Rating (100 = 100V)	6	-	Lead-Free

123NQ100PbF

Bulletin PD-21144 rev. A 10/06

International
IOR Rectifier

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level and Lead-Free.
Qualification Standards can be found on IR's Web site.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 10/06