
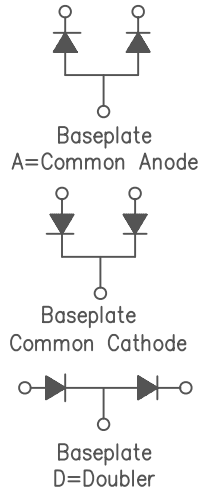


Schottky PowerMod

CPT40080 – CPT400100

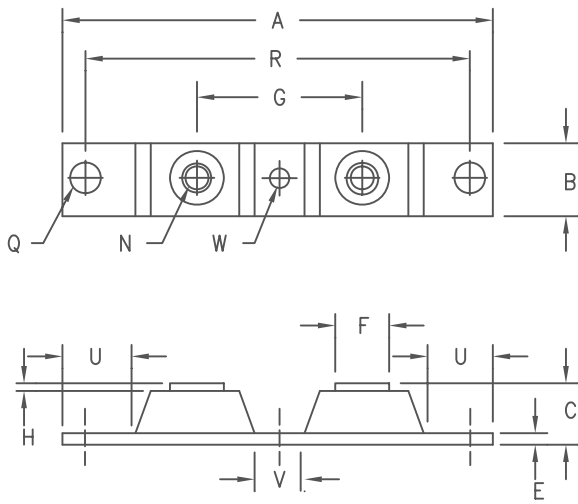

Notes:
Baseplate: Nickel plated copper

Dim.	Inches		Millimeters		Notes
	Min.	Max.	Min.	Max.	
A	---	3.630	---	92.20	
B	0.700	0.800	17.78	20.32	
C	---	0.630	---	16.00	
E	0.120	0.130	3.05	3.30	
F	0.490	0.510	12.45	12.95	
G	1.375 BSC		34.92 BSC		
H	0.010	---	0.25	---	
N	---	---	---	---	1/4-20
Q	0.275	0.290	6.99	7.37	Dia.
R	3.150 BSC		80.01 BSC		
U	0.600	---	15.24	---	
V	0.312	0.340	7.92	8.64	
W	0.180	0.195	4.57	4.95	Dia.

Microsemi Catalog Number	Industry Part Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
CPT40080*	403CNQ080 MBR40080CT	80V	80V
CPT40090*		90V	90V
CPT400100*	403CNQ100 MBRP400100CTL MBR400100CT	100V	100V

*Add Suffix A for Common Anode, D for Doubler

- Schottky Barrier Rectifier
- Guard Ring Protection
- 400 Amperes/80-100 Volts
- 175°C Junction Temperature
- Reverse Energy Tested

Electrical Characteristics

Average forward current per pkg	$I_F(AV)$ 400 Amps	$T_C = 121^\circ C$, Square wave, $R_{\theta JC} = 0.16^\circ C/W$
Average forward current per leg	$I_F(AV)$ 200 Amps	$T_C = 121^\circ C$, Square wave, $R_{\theta JC} = 0.32^\circ C/W$
Maximum surge current per leg	I_{FSM} 3000 Amps	8.3ms, half sine, $T_J = 175^\circ C$
Maximum repetitive reverse current per leg	$I_R(OV)$ 2 Amps	$f = 1$ KHZ, $25^\circ C$, 1 usec square wave
Max peak forward voltage per leg	V_{FM} .89 Volts	$I_{FM} = 200A: T_J = 25^\circ C^*$
Max peak forward voltage per leg	V_{FM} .69 Volts	$I_{FM} = 200A: T_J = 175^\circ C^*$
Max peak reverse current per leg	I_{RM} 50 mA	$V_{RRM, T_J = 125^\circ C^*$
Max peak reverse current per leg	I_{RM} 5.0 mA	$V_{RRM, T_J = 25^\circ C}$
Typical junction capacitance per leg	C_J 4400 pF	$V_R = 5.0V, T_C = 25^\circ C$

*Pulse test: Pulse width 300 usec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T_{STG}	$-55^\circ C$ to $175^\circ C$
Operating junction temp range	T_J	$-55^\circ C$ to $175^\circ C$
Max thermal resistance per leg	$R_{\theta JC}$	$0.32^\circ C/W$ Junction to case
Max thermal resistance per pkg	$R_{\theta JC}$	$0.16^\circ C/W$ Junction to case
Typical thermal resistance (greased)	$R_{\theta CS}$	$0.08^\circ C/W$ Case to sink
Terminal Torque		35-50 inch pounds
Mounting Base Torque (outside holes)		30-40 inch pounds
Mounting Base Torque (center hole) center hole must be torqued first		8-10 inch pounds
Weight		2.8 ounces (77 grams) typical



SCOTTSDALE

8700 East Thomas Road, P.O. Box 1390
Scottsdale, AZ 85252
PH: (480) 941-6300
FAX: (480) 947-1503
www.microsemi.com

05-10-07 Rev. 6

CPT40080 – CPT400100

Figure 1
Typical Forward Characteristics – Per Leg

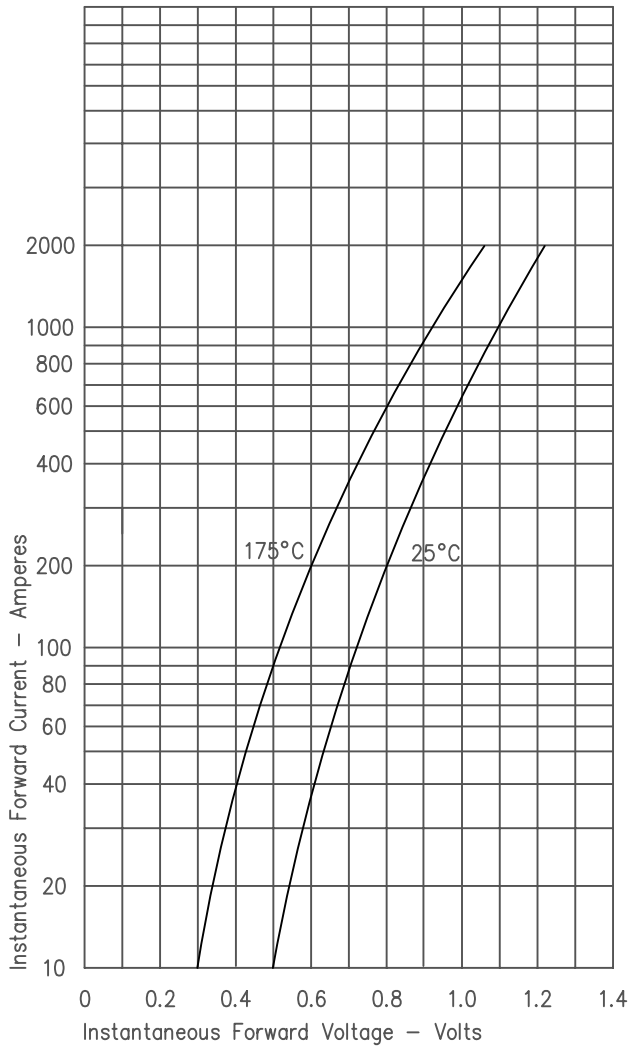


Figure 3
Typical Junction Capacitance – Per Leg

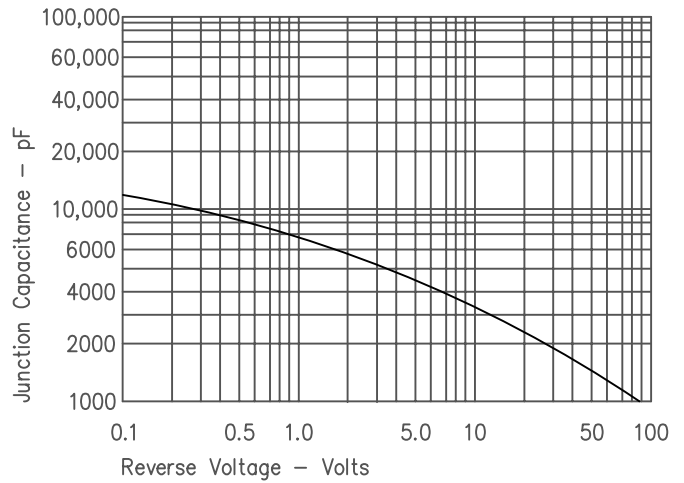


Figure 4
Forward Current Derating – Per Leg

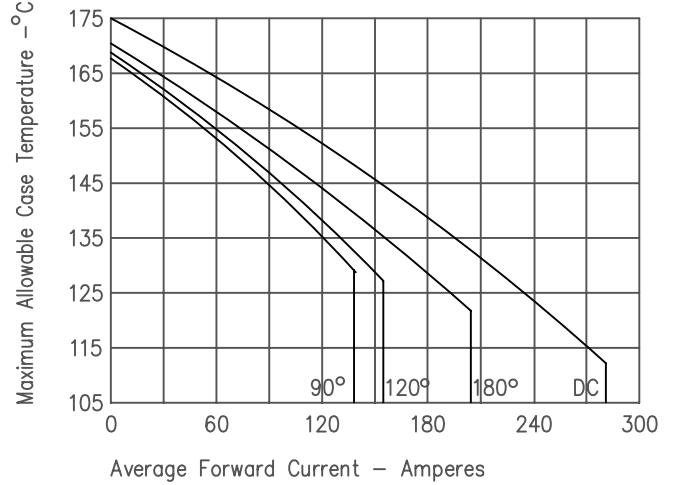


Figure 2
Typical Reverse Characteristics – Per Leg

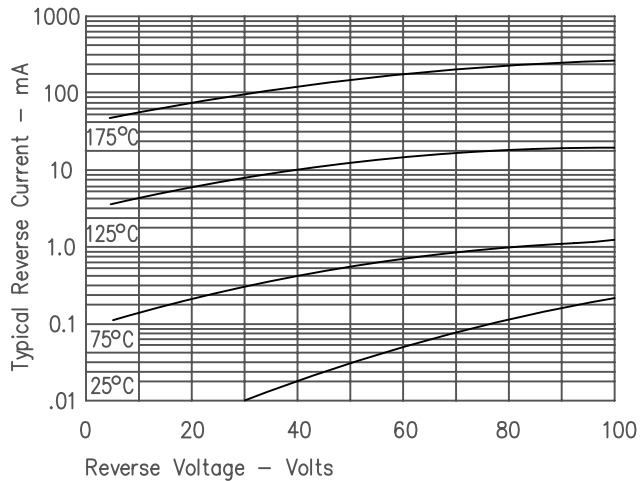


Figure 5
Maximum Forward Power Dissipation – Per Leg

