

Surface mount diode

Schottky barrier rectifiers diodes

SK 12...SK 110

Forward Current: 1 A

Reverse Voltage: 20 to 100 V

Features

- Max. solder temperature: 260°C
- Plastic material has UL classification 94V-0

Mechanical Data

- Plastic case DO-214AC / SMA
- Weight approx.: 0,07 g
- Terminals: plated terminals solderable per MIL-STD-750
- Mounting position: any
- Standard packaging: 7500 pieces per reel

1) Max. temperature of the terminals $T_T = 100\text{ °C}$

2) $I_F = 1\text{ A}$, $T_A = 25\text{ °C}$


3) $T_A = 25\text{ °C}$



4) Mounted on P.C. board with 25 mm² copper pads at each termina

Type	Polarity color band	Repetitive peak reverse voltage V_{RRM} V	Surge peak reverse voltage V_{RSM} V	Maximum forward voltage $T_j = 25\text{ °C}$ $I_F = 1\text{ A}$ V_F ²⁾ V	Maximum reverse recovery time $I_F = -\text{A}$ $I_R = -\text{A}$ $I_{RR} = -\text{A}$ t_{rr} ns
SK 12	-	20	20	0,5	-
SK 13	-	30	30	0,5	-
SK 14	-	40	40	0,5	-
SK 15	-	50	50	0,7	-
SK 16	-	60	60	0,7	-
SK 18	-	80	80	0,85	-
SK 110	-	100	100	0,85	-

Absolute Maximum Ratings		$T_c = 25\text{ °C}$, unless otherwise specified	
Symbol	Conditions	Values	Units
I_{FAV}	Max. averaged fwd. current, R-load, $T_T = 100\text{ °C}$	1	A
I_{FRM}	Repetitive peak forward current $f > 15\text{ Hz}$ ¹⁾	6	A
I_{FSM}	Peak fwd. surge current 50 Hz half sinus-wave ³⁾	30	A
I^2t	Rating for fusing, $t < 10\text{ ms}$ ³⁾	4,5	A ² s
R_{thA}	Max. thermal resistance junction to ambient ⁴⁾	70	K/W
R_{thT}	Max. thermal resistance junction to terminals	30	K/W
T_j	Operating junction temperature	-50...+150	°C
T_s	Storage temperature	-50...+150	°C

Characteristics		$T_c = 25\text{ °C}$, unless otherwise specified	
Symbol	Conditions	Values	Units
I_R	Maximum leakage current, $T_j = 25\text{ °C}$; $V_R = V_{RRM}$ $T_j = 100\text{ °C}$; $V_R = V_{RRM}$	<0,5 <5,0	mA mA
C_j	Typical junction capacitance (at MHz and applied reverse voltage of V)	-	pF
Q_{rr}	Reverse recovery charge ($U_R = V$; $I_F = A$; $dI_F/dt = A/ms$)	-	µC
E_{RSM}	Non repetitive peak reverse avalanche energy ($I_R = mA$; $T_j = \text{°C}$; inductive load switched off)	-	mJ

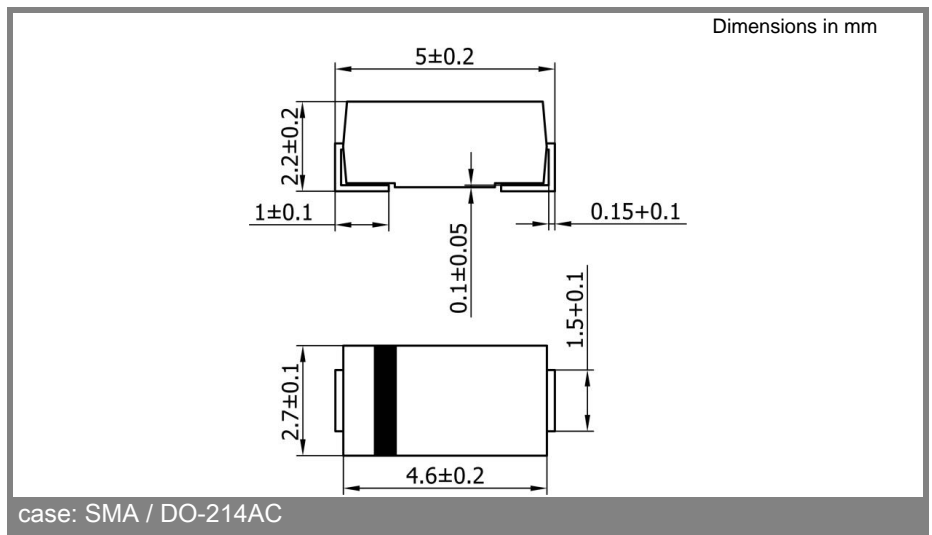

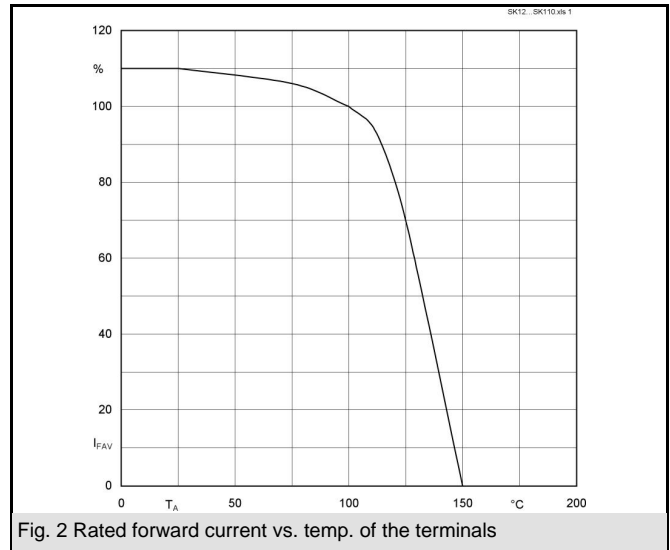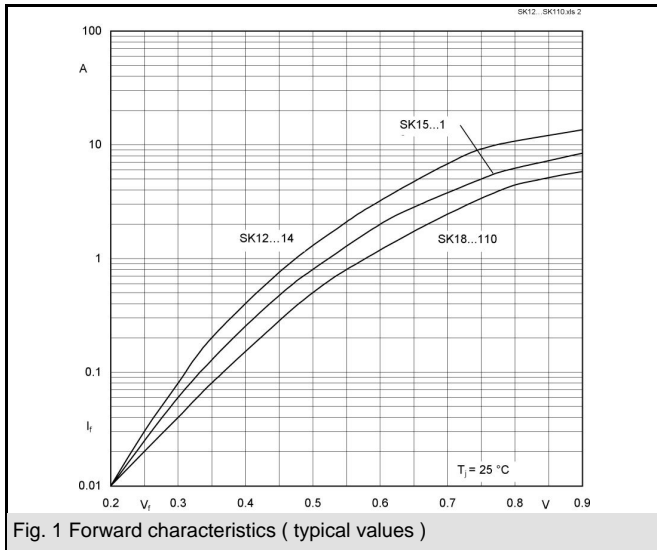

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com