


## Advanced Specification 42W DC/DC Power Module 48 V Input; 1.2V Output

- High Efficiency 89% Typ
- Fast Dynamic Response, 100us,  
+/- 150 mV<sub>peak</sub> Typ
- Heatsinks available as an option for extended operation
- Low Output Ripple, 60mV<sub>p-p</sub> Typ
- High power density, 60 W/in<sup>3</sup>
- Wide input voltage range (36-75V) according to ETSI Specifications
- Industry standard footprint & pin-out
- 1,500 Vdc isolation voltage
- Max case temperature +100°C
- UL 1950/UL<sub>C</sub> 1950 Recognized Pending
- Demonstrated compliance with isolation requirements equivalent to Basic Isolation per UL60 950
- TUV to EN60 950 Type Approved Pending

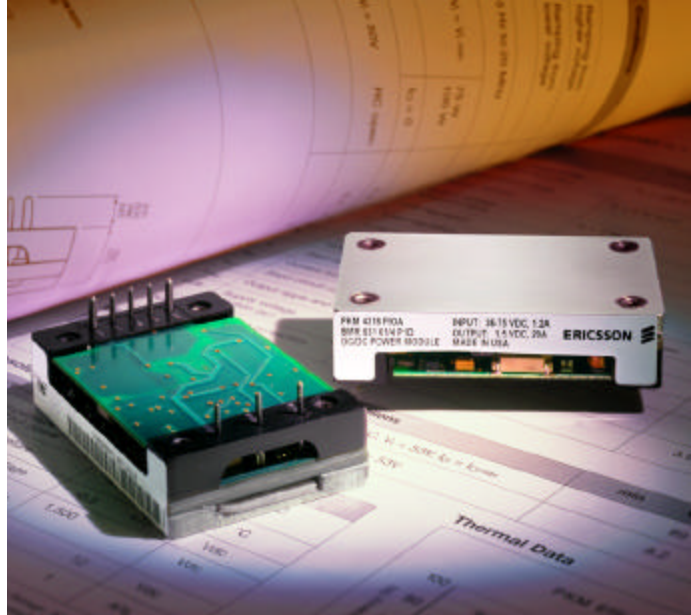

The PKM 4000A series of DC/DC power modules represents another Ericsson "industry first" achievement in the continued development of our "third generation" of high density, high efficiency DC/DC power modules in an industry standard quarter brick package with unparalleled performance. The PKM 4318A PIOB module is a new addition to the PKM 4000A series family specifically for low voltage silicon devices in a one step conversion at 89% typical efficiency. These breakthrough features have been achieved by using the most advanced patented topology, utilizing integrated magnetics and synchronous rectification on a low resistivity multilayer PCB.

The product features fast dynamic response times and low output ripple, which are important parameters when supplying low voltage logics. The PKM 4000A series is especially suited for limited board

space and high dynamic load applications. Ericsson's PKM 4000A Power Modules address the converging "New Telecoms" market by specifying the input voltage range in accordance with ETSI specifications. Included in the PKM 4000A series are over-voltage protection, under voltage protection, over temperature protection, soft-start, short circuit protection, and industry standard output trim adjustment. The PKM 4000A Series also offers the flexibility of using an optional heatsink when needed, enabling reduced airflow, extended reliability, and higher ambient temperature operation.

These modules are manufactured using highly automated manufacturing lines with a world-class quality commitment which is reflected in our standard five-year warranty. Ericsson Inc., Microelectronics has been an ISO 9001 certified supplier since 1991.



*For a complete product program please reference the back cover.*

# General

## Connections

Pin	Designation	Function
1	- IN	Negative Input
2	ON/OFF	Remote control (primary). To turn on and turn off the output.
3	+ IN	Positive Input.
4	- OUT	Negative Output.
5	- SEN	Negative Remote Sense
6	Trim	Output Voltage Adjust
7	+ SEN	Positive Remote Sense
8	+ OUT	positive Output

## Weight

Maximum 55 g

## Case

Aluminum baseplate with metal standoffs.

## Pins

Pin material: Brass

Pin plating: Tin/Lead over Nickel.


## Input $T_C < T_{C\ max}$

Characteristics		Conditions	min	typ	max	Unit
$V_I$	Input voltage range <sup>1)</sup>		36	75		Vdc
$V_{I\ off}$	Turn-off input voltage	Ramping from higher voltage	31	33		Vdc
$V_{I\ on}$	Turn-on input voltage	Ramping from lower voltage		34	36	Vdc
$C_I$	Input capacitance			2.8		$\mu$ F
$I_{I\ ac}$	Reflected ripple current	5 Hz to 20 MHz		20		$mA_{p-p}$
$I_{I\ max}$	Maximum input current	$V_I = V_{I\ min}, V_I = 53V$ PKM 4318A PIOB			1.44	A
$P_{Ii}$	Input idling power	$I_O = 0, V_I = 53V$		2.6	4.6	W
PRC	Input stand-by power (turned off with RC)	$V_I = 53V, RC\ open$		0.4	0.6	W
VTRIM	Maximum input				6	Vdc

### Note:

1) The input voltage range 36...75 V meets the requirements in the European Telecom Standard prETS 300 132-2 for Normal input voltage range in 48 V and 60 V DC power systems, -40.5...-57.0 V and -50.0...-72.0 V respectively.

## Mechanical Data

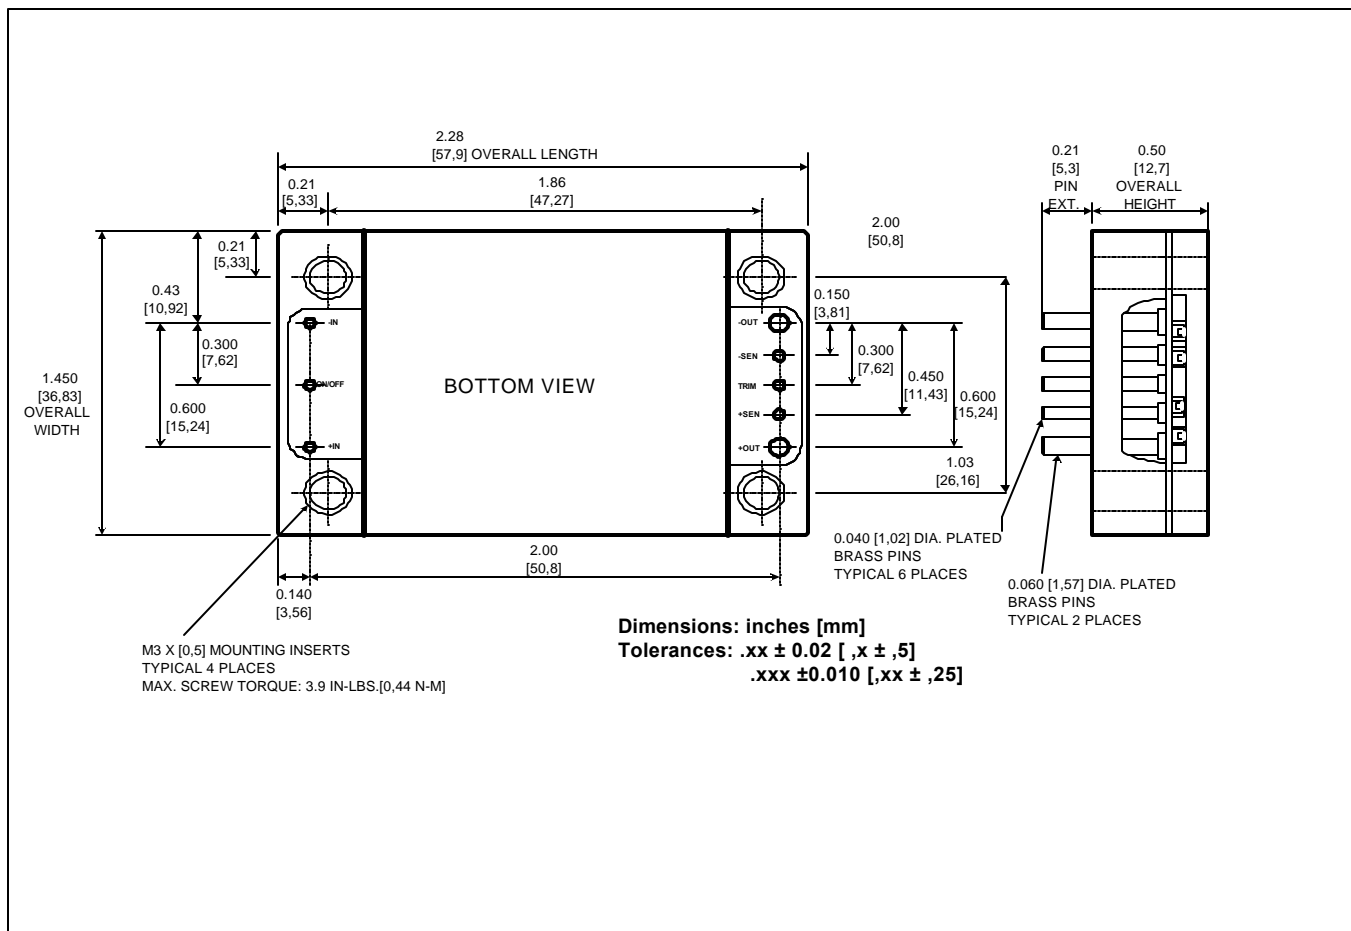

# PKM 4318A PIOB (42W)

$T_C = -40 \dots +100^\circ\text{C}$ ,  $V_I = 36 \dots 75\text{V}$  unless otherwise specified.

## Output

Characteristics		Conditions	Output			Unit
			min	typ	max	
$V_{O1}$	Output voltage initial setting and accuracy	$T_C = +25^\circ\text{C}$ , $V_I = 53\text{V}$ , $I_O = I_{Omax}$	1.19	1.2	1.22	V
	Output adjust range	$I_O = I_{Omax}$	0.96		1.3	V
$V_O$	Output voltage tolerance band	$I_O = 0$ to $I_{Omax}$	1.16		1.24	V
	Line regulation	$I_O = I_{Omax}$		3	10	mV
	Load regulation	$V_I = 53\text{V}$ , $I_O = 0$ to $I_{Omax}$ ,		3	10	mV
$V_{tr}$	Load transient voltage deviation	Load step = $0.25 \times I_{Omax}$ $di/dt = 1\text{A}/\mu\text{s}$		+/-150		mV
$t_{tr}$	Load transient recovery time			100		$\mu\text{s}$
$t_s$	Start-up time	From $V_I$ connection to $V_O = 0.9 \times V_{Onom}$		25	40	ms
$I_O$	Output current		0		35	A
$P_{Omax}$	Max output power	At $V_O = V_{Onom}$			42	W
$I_{lim}$	Current limit threshold	$V_O = 0.96 V_{Onom}$ @ $T_C < 100^\circ\text{C}$	37	38	43	A
$I_{sc}$	Short circuit current			39	44	A
$V_{Oac}$	Output ripple & noise	$I_O = I_{Omax}$ , $f < 20\text{MHz}$		60	100	mV <sub>p-p</sub>
SVR	Supply voltage rejection (ac)	$f < 1\text{kHz}$	-53			dB
OVP	Over voltage protection	$V_I = 50\text{V}$	1.8	2.0	2.24	V

## Miscellaneous


Characteristics		Conditions	min	typ	max	Unit
$\eta$	Efficiency	$I_O = I_{Omax}$ , $V_I = 53\text{V}$ , $T_C = +25^\circ\text{C}$		89		%
$P_d$	Power dissipation'	$I_O = I_{Omax}$ , $V_I = 53\text{V}$ , $T_C = +25^\circ\text{C}$		5.2		W
$f_s$	Switching frequency	$I_O = 0 \dots 1.0 \times I_{Omax}$		200		kHz

## Absolute Maximum Ratings

Characteristics		min	max	Unit	
$T_C$	Maximum Operating Case Temperature	-40	+100	$^\circ\text{C}$	
$T_S$	Storage temperature	-40	+125	$^\circ\text{C}$	
$V_I$	Input voltage	-0.5	Continuous	+80	Vdc
Vdc			Transient (100ms)	+100	Vdc
$V_{iso}$	Isolation voltage (input to output test voltage)	1,500		Vdc	
$V_{rc}$	Remote control voltage		12	Vdc	
$I^2t$	Inrush transient		1	A <sup>2</sup> s	

Stress in excess of Absolute Maximum Ratings may cause permanent damage. Absolute Maximum Ratings, sometimes referred to as "no destruction limits," are normally tested with one parameter at a time exceeding the limits of output data or electrical characteristics. If exposed to stress above these limits, function and performance may degrade in an unspecified manner.

## Thermal Data

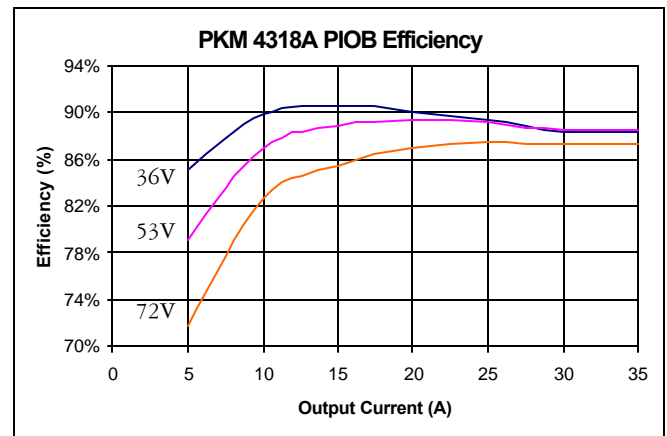

## Product Program

$V_I$	$V_O/I_O$ max	$P_O$ max	Ordering No.
48/60 V	1.2V/35A	42 W	PKM 4318A PIOB

The PKM 4318A PIOB DC/DC power modules will be available with the different options listed in the Product Options Table

Please check with the factory for availability.

## Product Options

Option	Suffix	Example
Negative remote on/off logic, Industry Standard trim (i.e. $V_o$ Adjust)	-	PKM 4318A PIOB
Positive remote on/off logic	P	PKM 4318A PIPOB
Lead length 0.145"± 0.010"	LA	PKM 4318A PIOBLA
Additional Insulation Pad	C	PKM 4318A PIOBC

Example of Combined Options:

PKM 4318A PIOBLAC - 0.145" lead length with additional insulation pad.

Information given in this Advanced Specification is believed to be accurate and reliable. No responsibility is assumed for the consequences of its use for any infringement of patents or other rights of third parties that may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Ericsson Microelectronics. These products are sold only according to Ericsson Microelectronics' general conditions of sale, unless otherwise confirmed in writing. Specifications are subject to change without notice.

Ericsson Inc., Microelectronics  
1700 International Pkwy., Suite 200  
Richardson, Texas 75081  
Phone: 877-ERICMIC  
www.ericsson.com/microelectronics

For sales contacts, please refer to our website  
or call: 877-374-2642 or fax: 972-583-8355

The latest and most complete information can  
be found on our website!

Advanced Specification

AE/LZT 108 5517 R1

© Ericsson Inc., Microelectronics, January 2002