


## **DIODE (ISOLATED MOLD TYPE)**

# DG20AA

UL-E76102(M)

**DG20AA** is a medium power isolated module diode suitable for wide range of industrial and home electronics use. **DG20AA** is highly reliable by glass pasivation.

- $I_{F(AV)} = 20A$ ,  $V_{RRM} = 1600V$
  - Tab terminals for easy wiring.

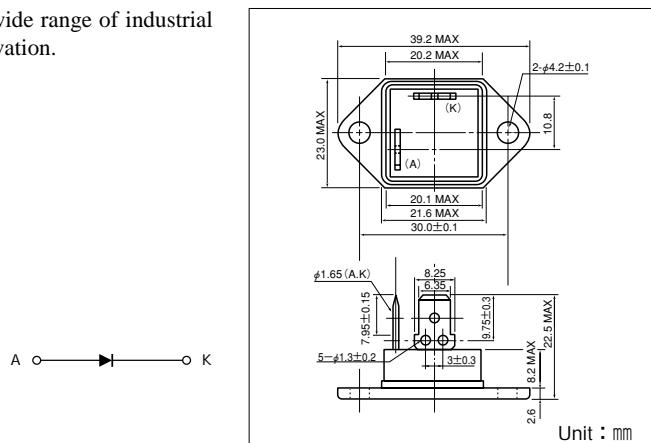

## ■ Maximum Ratings

(T<sub>j</sub>=25°C unless otherwise specified)

Symbol	Item	Ratings				Unit
		DG20AA40	DG20AA80	DG20AA120	DG20AA160	
V <sub>RRM</sub>	Repetitive Peak Reverse Voltage	400	800	1200	1600	V
V <sub>RSM</sub>	Non-Repetitive Peak Reverse Voltage	480	960	1300	1700	V

Symbol	Item	Conditions	Ratings	Unit
I <sub>F(AV)</sub>	Average Forward Current	Single phase, half wave, 180° conduction, T <sub>c</sub> : 101°C	20	A
I <sub>F(RMS)</sub>	R.M.S. Forward Current	Single phase, half wave, 180° conduction, T <sub>c</sub> : 101°C	31	A
I <sub>FSM</sub>	Surge Forward Current	½ cycle, 50Hz/60Hz, peak value, non-repetitive	410/450	A
I <sup>2</sup> t	I <sup>2</sup> t	Value for one cycle of surge current	840	A <sup>2</sup> S
T <sub>j</sub>	Junction Temperature		-40 to +150	°C
T <sub>stg</sub>	Storage Temperature		-40 to +125	°C
V <sub>iso</sub>	Isolation Breakdown Voltage (R.M.S.)	A.C.1 minute	2500	°C
	Mounting Torque (M4)	Recommended Value 1.0-1.4 (10-14)	1.5 (15)	N·m (kgf·cm)
	Mass		23	g

## ■ Electrical Characteristics

Symbol	Item	Conditions	Ratings	Unit
I <sub>RRM</sub>	Repetitive Peak Reverse Current, max.	at V <sub>DRM</sub> , single phase, half wave, T <sub>j</sub> =125°C	8	mA
V <sub>FM</sub>	Forward Voltage Drop, max.	Forward current 65A, T <sub>j</sub> =25°C, Inst. measurement	1.65	V
R <sub>th(j-c)</sub>	Thermal Impedance, max.	Junction to case	1.60	°C/W

