

Solid-state Relay G3NE

Compact, Low-cost, SSR Switching 5 to 20 A

- Wide load voltage range: 75 to 264 VAC. Both 100-V and 200-V loads can be handled with the same model.
- Dedicated, compact aluminum PCB and power elements used.
- Built-in varistor effectively absorbs external surges.
- Quick-connect #110 input terminals and #250 output connections.
- UL, CSA, and IEC/EN (TÜV) approval obtained for “-US” models.



Ordering Information

List of Models

| Isolation | Zero cross function | Indicator | Rated output load | Rated input voltage | Model |
|------------|---------------------|-----------|------------------------|---------------------|------------------------------------------------|
| Phototriac | Yes | No | 5 A at 100 to 240 VAC | 5, 12, 24 VDC | G3NE-205T G3NE-205T-US G3NE-205T-2-US |
| | | | 10 A at 100 to 240 VAC | | G3NE-210T G3NE-210T-US G3NE-210T-2-US |
| | | | 20 A at 100 to 240 VAC | | G3NE-220T G3NE-220T-US G3NE-220T-2-US |
| | No | | 5 A at 100 to 240 VAC | | G3NE-205TL G3NE-205TL-US G3NE-205TL-2-US |
| | | | 10 A at 100 to 240 VAC | | G3NE-210TL G3NE-210TL-US G3NE-210TL-2-US |
| | | | 20 A at 100 to 240 VAC | | G3NE-220TL G3NE-220TL-US G3NE-220TL-2-US |

Note: When ordering, specify the input voltage.

Accessories (Order Separately) Heat Sinks

The following heat sinks are thin and can be DIN-track mounted. See *Dimensions* for details.

| Model | Applicable SSR |
|-----------|-----------------------------------------|
| Y92B-N50 | G3NE-205T(L)(-2)(-US)/-210T(L)(-2)(-US) |
| Y92B-N100 | G3NE-220T(L)(-2)(-US) |

Specifications

Ratings

Input

| Rated voltage | Operating voltage | Voltage level | | Input impedance | |
|---------------|-------------------|---------------|--------------|--------------------------|-----------------------------|
| | | Must operate | Must release | With zero cross function | Without zero cross function |
| 5 VDC | 4 to 6 VDC | 4 VDC max. | 1 VDC min. | 250 Ω±20% | 300 Ω±20% |
| 12 VDC | 9.6 to 14.4 VDC | 9.6 VDC max. | | 600 Ω±20% | 800 Ω±20% |
| 24 VDC | 19.2 to 28.8 VDC | 19.2 VDC max. | | 1.6 kΩ±20% | |

Note: Each model has 5-VDC, 12-VDC, and 24-VDC input versions.

SSR

Output

| Model | Applicable load | | | | |
|-----------------------|--------------------|--------------------|-------------------------------|-------------------|------------------------|
| | Rated load voltage | Load voltage range | Load current (See note 1.) | | Inrush current |
| | | | With heat sink | Without heat sink | |
| G3NE-205T(L)-(-2)(US) | 100 to 240 VAC | 75 to 264 VAC | 0.1 to 5 A | 0.1 to 5 A | 60 A (60 Hz, 1 cycle) |
| G3NE-210T(L)-(-2)(US) | | | 0.1 to 10 A (See note 2.) | 0.1 to 5 A | 150 A (60 Hz, 1 cycle) |
| G3NE-220T(L)-(-2)(US) | | | 0.1 to 20 A (See note 2.) | 0.1 to 5 A | 220 A (60 Hz, 1 cycle) |

Note: 1. The load current varies depending on the ambient temperature. Refer to *Load Current vs. Ambient Temperature* under *Engineering Data* for details.


2. These values apply when using a dedicated radiator or a radiation plate of specified size.

■ Characteristics

| Item | G3NE-2□□T(-2)(US) | G3NE-2□□TL(-2)(US) |
|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------|--------------------|
| Operate time | 1/2 of load power source cycle + 1 ms max. | 1 ms max. |
| Release time | 1/2 of load power source cycle + 1 ms max. | |
| Output ON voltage drop | 1.6 V (RMS) max. | |
| Leakage current | 2 mA max. (at 100 VAC) 5 mA max. (at 200 VAC) | |
| Insulation resistance | 100 MΩ min. (at 500 VDC) | |
| Dielectric strength | 2,000 VAC, 50/60 Hz for 1 min | |
| Vibration resistance | Destruction: 10 to 55 to 10 Hz, 0.75-mm single amplitude (1.5-mm double amplitude) | |
| Shock resistance | Destruction: 1,000 m/s ² | |
| Ambient temperature | Operating: -30°C to 80°C (with no icing or condensation) Storage: -30°C to 100°C (with no icing or condensation) | |
| Ambient humidity | Operating: 45% to 85% | |
| Approved standards (only for -US models) | UL508 File No.E64562/CSA C22.2 (No.0, No.14) File No. LR35535 TUV R9051064 (VDE0435) (EN60950) | |
| Weight | Approx. 37 g | |

Engineering Data


Load Current vs. Ambient Temperature

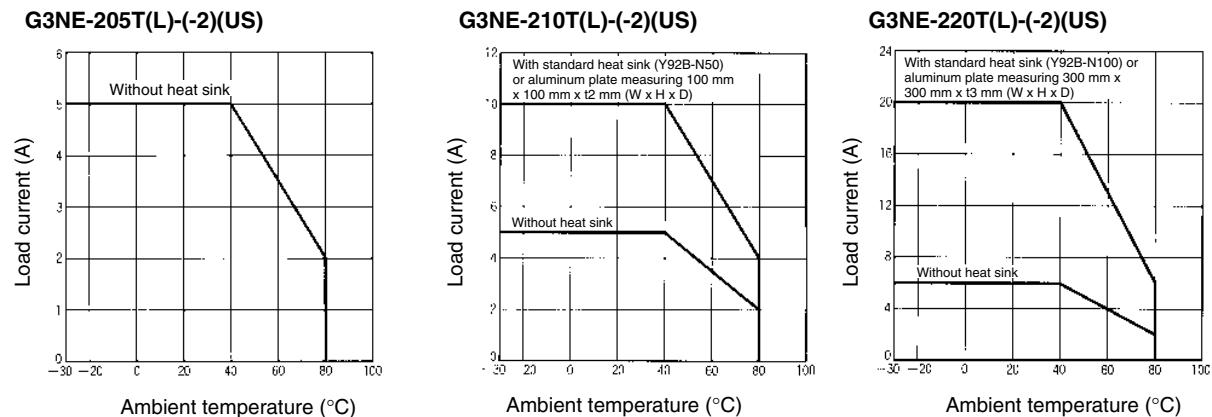


Inrush Current Resistivity: Non-repetitive

Note: Keep the inrush current to half the rated value if it occurs repetitively.


G3NE-205T(L)-(-2)(US)

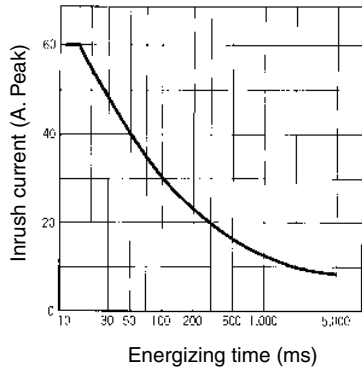

G3NE-210T(L)-(-2)(US)

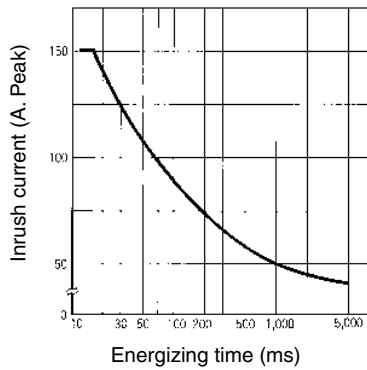


G3NE-220T(L)-(-2)(US)

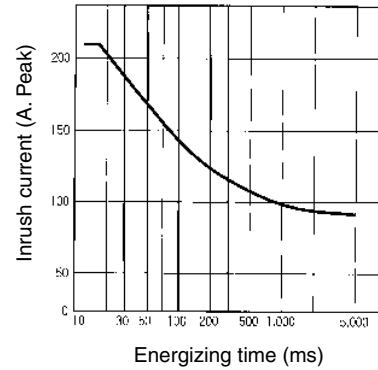

Dimensions


Note: All units are in millimeters unless otherwise indicated.

G3NE-205T(L)/210T(L)/220T(L)-(-2)(US)

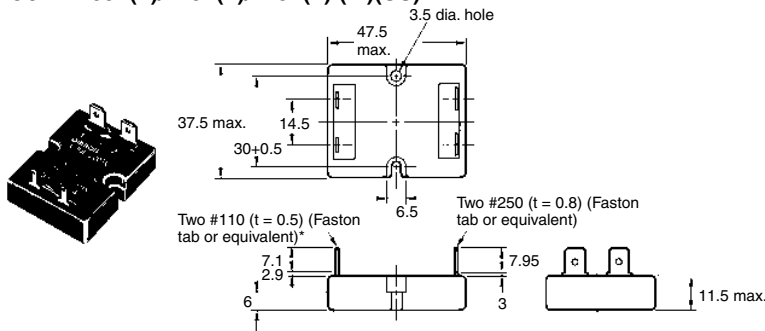


* G3NE-2□□T(L)-2-US: Two, #187 (t=0.5) (Faston tab or equivalent)


Terminal Arrangement/ Internal Connections (Top View)

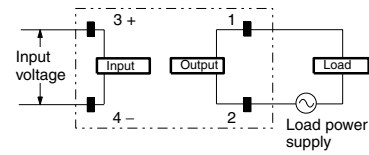


Mounting Holes




Heat Sink Y92B-N50

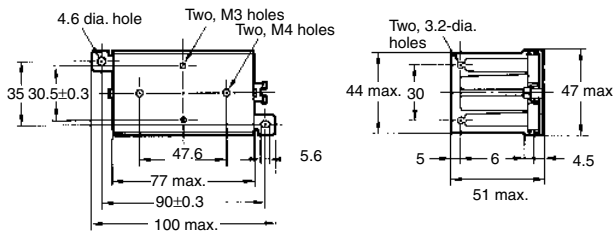


Mounting Holes

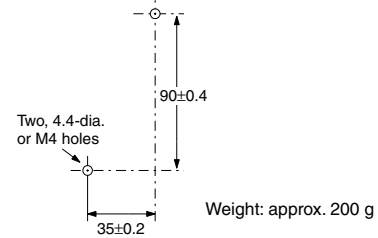

Y92B-N100

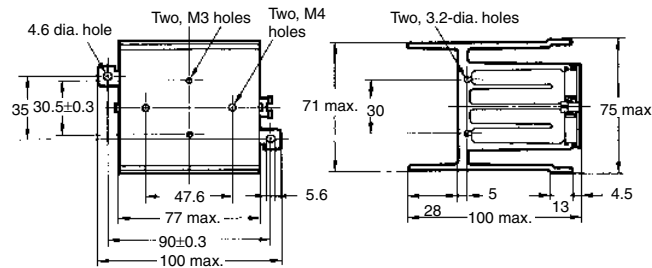

Mounting Holes

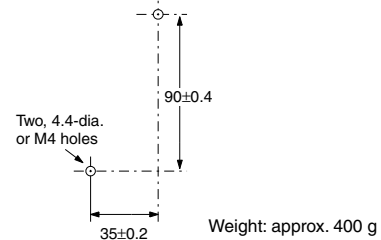

Precautions

Refer to the *Technical Information for SSRs* (Cat. No. J137) for general precautions.

■ Correct Use

Do not apply excessive force to the terminals. Exercise care when pulling or inserting the terminal clips for the Quick Connector (QC).

When attaching a heat sink to the G3NE, in order to facilitate heat dissipation, apply heat conductive grease on the heat sink. Tighten the mounting screws of the heat sink with a torque of 0.59 to 0.98 N·m.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Cat. No. K062-E1-03

In the interest of product improvement, specifications are subject to change without notice.