

# 1.5A Low Dropout Voltage Regulator

## FEATURES

- Guaranteed 1.5A Output Current
- Three Terminal Adjustable or Fixed 2.5V, 3.3V and 5.0V
- Low Quiescent Current
- Low Dropout Voltage of 1.1V @ 1.5A
- 0.1% Line and 0.1% Load Regulation
- Stable with 10uF Ceramic Capacitor
- Overcurrent and Thermal Protection
- Available Packages: TO-252, TO-220, and TO-263
- Similar to Industry Standard LT1086/LT1586

## APPLICATIONS

- Desktop PCs, Servers
- Powering VGA and Sound Cards
- Cordless Phones
- Battery Chargers
- Adjustable Power Supplies
- Portable Instrumentation
- SMPS Post-Regulator
- Constant Current Regulators
- Disk Drives

Refer to Page 5 for Pinouts


Now Available in Lead Free Packaging

## DESCRIPTION

The SPX2815 is a low power positive-voltage regulator designed to satisfy moderate power requirements with a cost effective, small footprint solution. This device is an excellent choice for use in battery-powered applications and portable computers. The SPX2815 features very low quiescent current and a low dropout voltage of 1.1V at a full load. As output current decreases, quiescent current flows into the load, increasing efficiency. SPX2815 is available in adjustable or fixed 2.5V, 3.3V and 5.0V output voltages.

The SPX2815 is offered in several 3-pin surface mount packages: TO-252, TO-220 and TO-263. An output capacitor of 10µF ceramic or tantalum provides unconditional stability.

## FUNCTIONAL DIAGRAM (Adjustable)

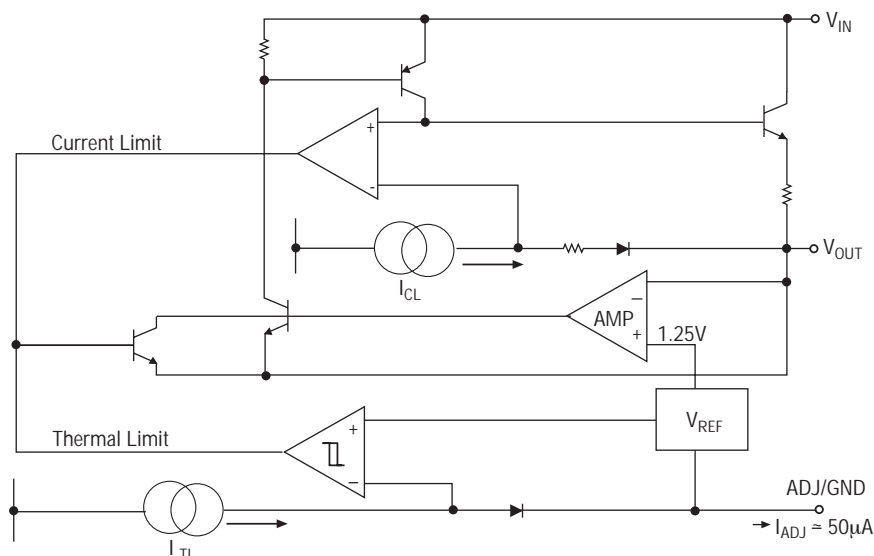

## ABSOLUTE MAXIMUM RATINGS

Power Dissipation.....Internally Limited  
 Lead Temperature (soldering, 5 seconds) .....260°C  
 Storage Temperature Range.....-65°C to +150°C

Operating Junction Temperature Range.....-40°C to +125°C  
 Input Supply Voltage ..... +10V  
 Input to Output Voltage ..... +8.8V  
 ESD Rating ..... 2kV min

## ELECTRICAL CHARACTERISTICS

at  $V_{IN} = V_{OUT} + 1.5V$ ,  $T_A = 25^\circ C$ ,  $C_{IN} = C_{OUT} = 10\mu F$ ,  $I_{OUT} = 10mA$ , unless otherwise specified. The **Boldface** applies over the full operating temperature range.

| PARAMETER                            | MIN                   | TYP                               | MAX                   | MIN                   | TYP                               | MAX                   | UNITS         | CONDITIONS   |
|--------------------------------------|-----------------------|-----------------------------------|-----------------------|-----------------------|-----------------------------------|-----------------------|---------------|--|
| <b>2.5V Version</b>                  | <b>SPX2815A</b>       |                                   |                       | <b>SPX2815</b>        |                                   |                       |               |  |
| Output Voltage                       | 2.475<br><b>2.450</b> | 2.500                             | 2.525<br><b>2.550</b> | 2.450<br><b>2.425</b> | 2.500                             | 2.550<br><b>2.575</b> | V             | $I_{OUT} = 10mA$ , $V_{IN} = 4.5V$<br>$10mA \leq I_{OUT} \leq 1.5A$ , $4.25V \leq V_{IN} \leq 10V$   |
| <b>3.30V Version</b>                 |                       |                                   |                       |                       |                                   |                       |               |  |
| Output Voltage                       | 3.267<br><b>3.234</b> | 3.300                             | 3.333<br><b>3.366</b> | 3.234<br><b>3.201</b> | 3.300                             | 3.366<br><b>3.399</b> | V             | $I_{OUT} = 10mA$ , $V_{IN} = 5V$<br>$10mA \leq I_{OUT} \leq 1.5A$ , $4.75V \leq V_{IN} \leq 10V$   |
| <b>5.0V Version</b>                  |                       |                                   |                       |                       |                                   |                       |               |  |
| Output Voltage                       | 4.950<br><b>4.900</b> | 5.000                             | 5.050<br><b>5.100</b> | 4.900<br><b>4.850</b> | 5.000                             | 5.100<br><b>5.150</b> | V             | $I_{OUT} = 10mA$ , $V_{IN} = 7V$<br>$10mA \leq I_{OUT} \leq 1.5A$ , $6.50V \leq V_{IN} \leq 10V$   |
| <b>All Voltage Options</b>           |                       |                                   |                       |                       |                                   |                       |               |  |
| Reference Voltage                    | 1.238<br><b>1.225</b> | 1.250                             | 1.262<br><b>1.275</b> | 1.225<br><b>1.212</b> | 1.250                             | 1.275<br><b>1.287</b> | V             | $I_{OUT} = 10mA$ , $(V_{IN} - V_{OUT}) = 2V$<br>$10mA \leq I_{OUT} \leq 1.5A$ , $1.5V \leq (V_{IN} - V_{OUT}) \leq 10V$  |
| Output Voltage Temperature Stability |                       | 0.3                               |                       |                       | 0.5                               |                       | %             |  |
| Line Regulation                      |                       | 0.1<br>0.1<br>0.1                 | 0.2<br>0.2<br>0.2     |                       | 0.1<br>0.1<br>0.1                 | 0.2<br>0.2<br>0.2     | %             | $4.25V \leq V_{IN} \leq 10V$ , $V_{OUT} = 2.5V$ , $I_{OUT} = 10mA$<br>$4.75V \leq V_{IN} \leq 10V$ , $V_{OUT} = 3.3V$ , $I_{OUT} = 10mA$<br>$6.50V \leq V_{IN} \leq 10V$ , $V_{OUT} = 5.0V$ , $I_{OUT} = 10mA$ |
| Load Regulation                      |                       | 0.1<br>0.1<br>0.1                 | 0.3<br>0.3<br>0.3     |                       | 0.1<br>0.1<br>0.1                 | 0.3<br>0.3<br>0.3     | %             | $10mA \leq I_{OUT} \leq 1.5A$ , $V_{OUT} = 2.5V$<br>$10mA \leq I_{OUT} \leq 1.5A$ , $V_{OUT} = 3.3V$<br>$10mA \leq I_{OUT} \leq 1.5A$ , $V_{OUT} = 5.0V$   |
| Dropout Voltage (Note 2)             |                       | 1.00<br>1.10                      | 1.2                   |                       | 1.00<br>1.10                      | 1.2                   | V             | $I_{OUT} = 0.5A$<br>$I_{OUT} = 1.5A$   |
| Quiescent Current                    |                       | 4                                 | 10                    |                       | 4                                 | 10                    | mA            | Fixed voltage versions   |
| Adjust Pin Current                   |                       | 50                                | <b>120</b>            |                       | 50                                | <b>120</b>            | $\mu A$       |  |
| Current Limit                        | 2.5                   |                                   |                       | 2.5                   |                                   |                       | A             | $(V_{IN} - V_{OUT}) = 5V$  |
| Thermal Regulation                   |                       | 0.01                              | 0.1                   |                       | 0.01                              | 0.1                   | %/W           | 25°C, 30mS pulse   |
| Ripple Rejection                     | 60                    | 75                                |                       | 60                    | 75                                |                       | dB            | $f_{RIPPLE} = 120Hz$ , $(V_{IN} - V_{OUT}) = 2V$ ,<br>$V_{RIPPLE} = 1V_{PP}$   |
| Long Term Stability                  |                       | 0.03                              |                       |                       | 0.03                              |                       | %             | 125°C, 1000Hrs   |
| RMS Output Noise                     |                       | 0.003                             |                       |                       | 0.003                             |                       | %             | % of $V_{OUT}$ , $10Hz \leq f \leq 10kHz$  |
| Thermal Resistance                   |                       | 3<br>29.3<br>3<br>31.4<br>6<br>50 |                       |                       | 3<br>29.3<br>3<br>31.4<br>6<br>50 |                       | $^{\circ}C/W$ | TO-220 Junction to Case, at Tab<br>TO-220 Junction to Ambient<br>TO-263 Junction to Case, at Tab<br>TO-263 Junction to Ambient<br>TO-252 Junction to Case, at Tab<br>TO-252 Junction to Ambient                |

## TYPICAL PERFORMANCE CHARACTERISTICS

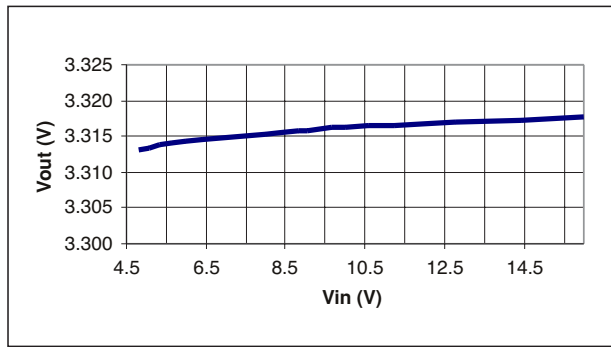


Figure 1. Line Regulation for SPX2815U-3.3;  $I_{OUT}=10mA$

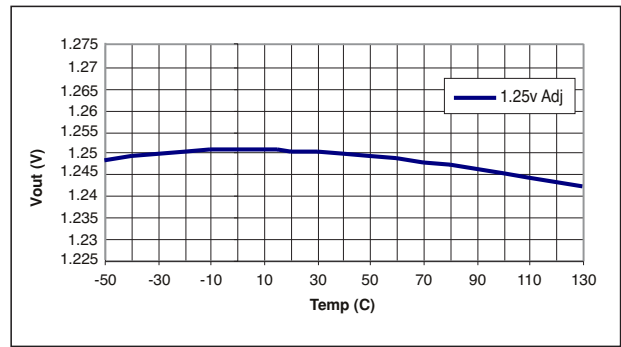


Figure 2.  $V_{OUT}$  vs Temperature,  $V_{IN}=2.5V$ ,  $I_{OUT}=10mA$

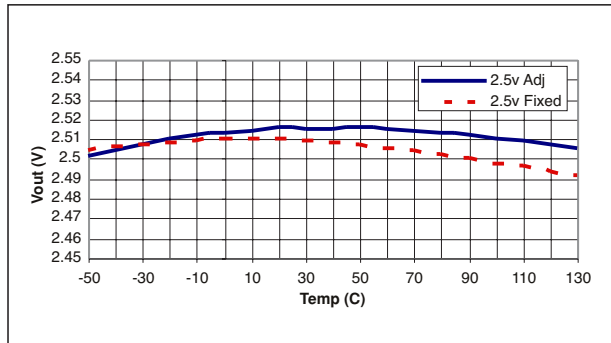


Figure 3.  $V_{IN}=4.0V$ ,  $I_{OUT}=10mA$

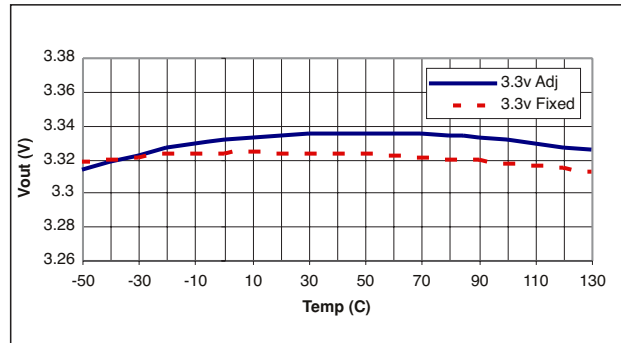


Figure 4.  $V_{IN}=5.0V$ ,  $I_{OUT}=10mA$

## APPLICATION INFORMATION

### Output Capacitor

To ensure the stability of the SPX2815, an output capacitor of at least  $10\mu F$  (ceramic or tantalum) or  $22\mu F$  (aluminum) is required. The value may change based on the application requirements of the output load or temperature range. The value of Equivalent Series Resistance (ESR) can vary based on the type of capacitor used in the applications to guarantee stability. The recommended value for ESR is  $0.5\Omega$  or less. A larger value of output capacitance (up to  $100\mu F$ ) can improve the load transient response.

### Soldering Methods

The SPX2815 die is attached to the heatsink lead which exits opposite the input, output, and ground pins.

### Thermal Characteristics

The SPX2815 features internal thermal limiting to protect the device during overload condi-

tions. Special care needs to be taken during continuous load conditions such that the maximum junction temperature does not exceed  $125^{\circ}C$ . Thermal protection is activated at  $>179^{\circ}C$  and deactivated at  $<165^{\circ}C$ .

The thermal interaction from other components in the application can affect the thermal resistance of the SPX2815. The actual thermal resistance can be determined with experimentation.

SPX2815 power dissipation is calculated as follows:

$$P_D = (V_{IN} - V_{OUT})(I_{OUT})$$

Maximum Junction Temperature range:

$$T_J = T_A(\max) + P_D * \theta_{JA} \text{ (thermal resistance, junction-to-ambient)}$$

Maximum junction temperature must not exceed  $125^{\circ}C$ .

### Ripple Rejection

Ripple rejection can be improved by adding a capacitor between the ADJ pin and ground as shown in Figure 8. When ADJ pin bypassing is used, the value of the output capacitor required increases to its maximum. If the ADJ pin is not bypassed, the value of the output capacitor can be lowered to 22μF for an electrolytic aluminum capacitor or 10μF for a solid tantalum capacitor (Fig 7). However, the value of the ADJ-bypass capacitor should be chosen with respect to the following equation:

$$C = \frac{1}{(6.28 * F_R * R_1)}$$

Where

- C = value of the capacitor in Farads (select an equal or larger standard value),
- F<sub>R</sub> = ripple frequency in Hz,
- R<sub>1</sub> = value of resistor R1 in Ohms.

If an ADJ-bypass capacitor is used, the amplitude of the output ripple will be independent of the output voltage. If an ADJ-bypass capacitor is not used, the output ripple will be proportional to the ratio of the output voltage to the reference voltage:

$$M = V_{OUT} / V_{REF}$$

Where M = multiplier for the ripple seen when the ADJ pin is optimally bypassed.

$$V_{REF} = 1.25V$$

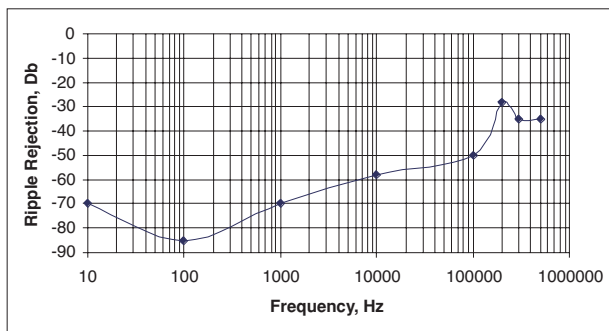


Figure 5. Ripple Rejection; Vin=3.3V, Vout=1.8V (adj.), Iload=200mA

Ripple rejection for the adjustable version is shown in Figure 5.

### Output Voltage

The output of the adjustable regulator can be set to any voltage between 1.25V and 15V. The value of V<sub>OUT</sub> can be quickly approximated using the formula

$$V_{OUT} = 1.25 * (R_1 + R_2) / R_1$$

A small correction to this formula is required depending on the values of resistors R<sub>1</sub> and R<sub>2</sub>, since the adjustable pin current (approx 50μA) flows through R<sub>2</sub>. When I<sub>ADJ</sub> is taken into account, the formula becomes

$$V_{OUT} = V_{REF} (1 + (R_2 / R_1)) + I_{ADJ} * R_2$$

where

$$V_{REF} = 1.25V$$

### Layout Considerations

Parasitic line resistance can degrade load regulation. In order to avoid this, connect R<sub>1</sub> directly to V<sub>OUT</sub> as illustrated in Figure 13. For the same reason, R<sub>2</sub> should be connected to the negative side of the load.

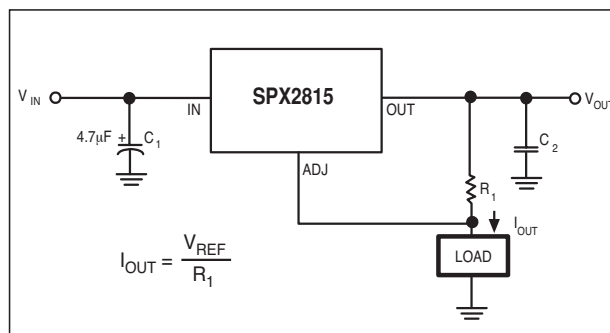


Figure 6. Current Source

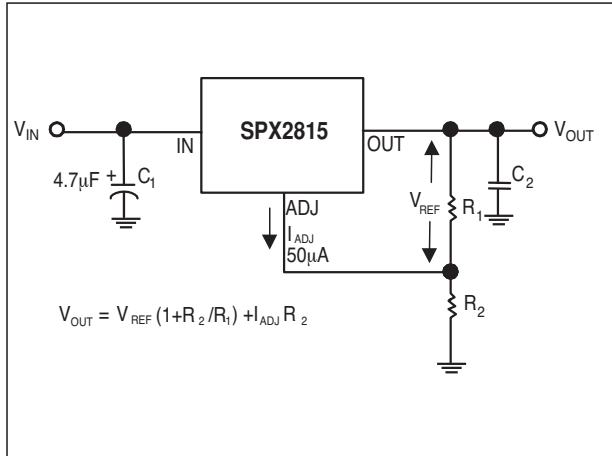


Figure 7. Typical Adjustable Regulator

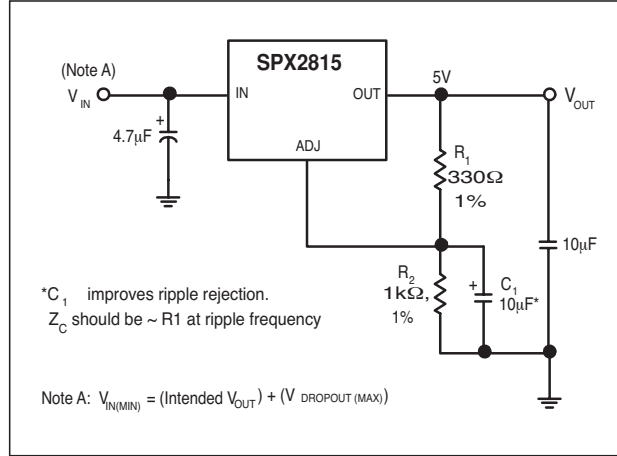


Figure 8. Improving Ripple Rejection

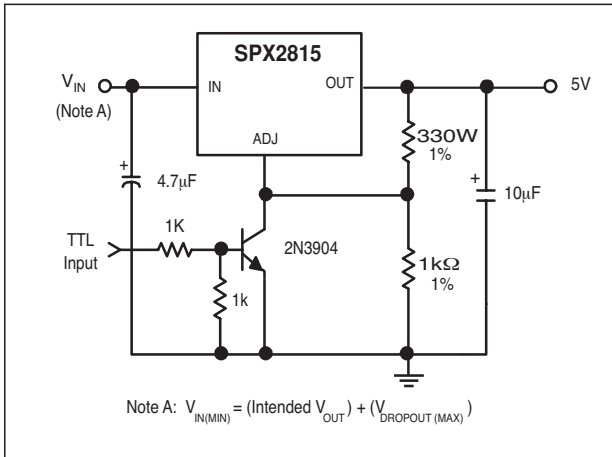


Figure 9. 5V Regulator with Shutdown






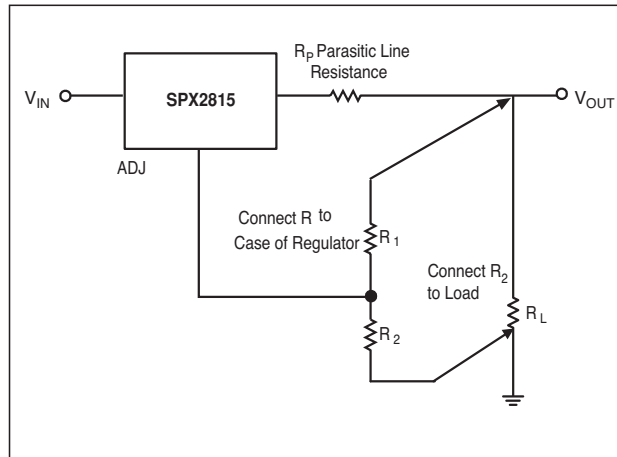


Figure 10. Recommended Connections for Best Results




PINOUTS

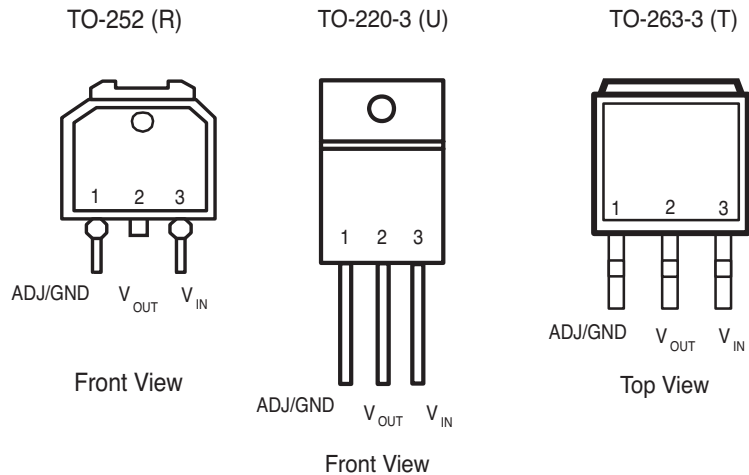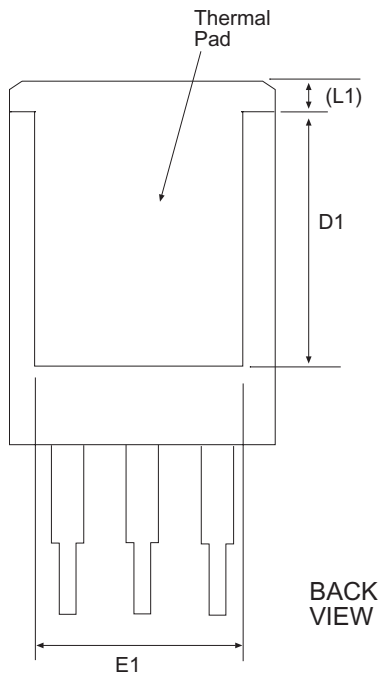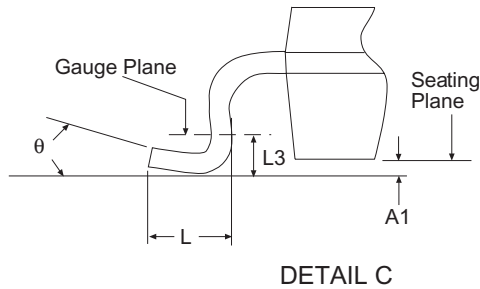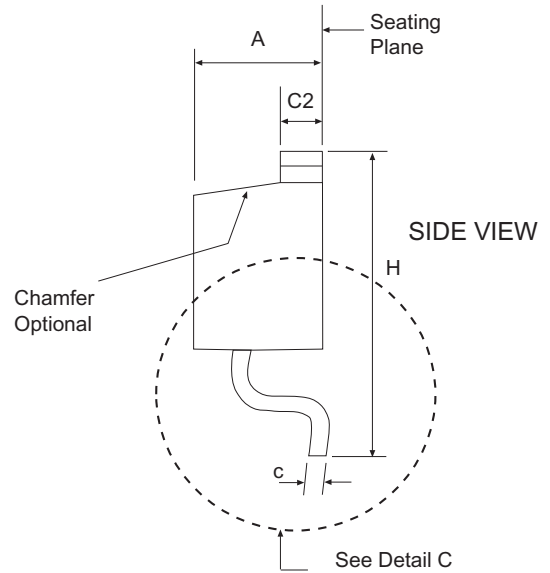


Note: Tab is connected to Pin 2 (Vout)

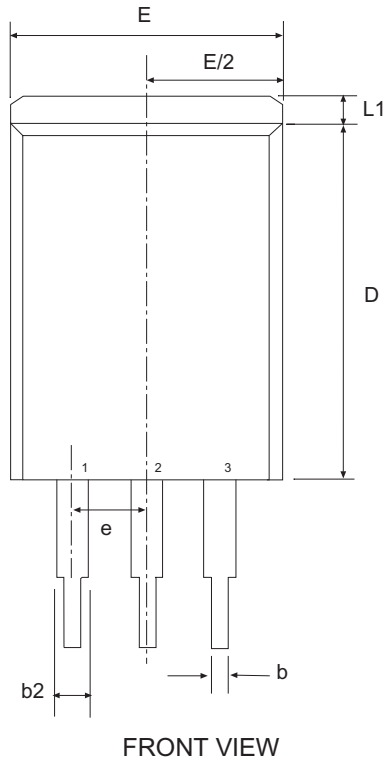

| 3 Pin TO-263 JEDEC TO-263   |                                 |     | Variation AA |  |     |       |
|-----------------------------|---------------------------------|-----|--------------|--|-----|-------|
| SYMBOL                      | Inches<br>Controlling Dimension |     |              | Millimeters<br>Conversion Factor:<br>1 Inch = 25.40 mm |     |       |
|                             | MIN                             | NOM | MAX          | MIN  | NOM | MAX   |
| A                           | 0.160                           | -   | 0.190        | 4.06   | -   | 4.83  |
| A1                          | 0.000                           | -   | 0.010        | 0.00   | -   | 0.25  |
| b                           | 0.020                           | -   | 0.039        | 0.51   | -   | 0.99  |
| b2                          | 0.045                           | -   | 0.070        | 1.14   | -   | 1.78  |
| c                           | 0.015                           | -   | 0.029        | 0.38   | -   | 0.74  |
| c2                          | 0.045                           | -   | 0.065        | 1.14   | -   | 1.65  |
| D                           | 0.330                           | -   | 0.380        | 8.38   | -   | 9.65  |
| D1                          | 0.270                           | -   | -            | 6.86   | -   | -     |
| E                           | 0.380                           | -   | 0.420        | 9.65   | -   | 10.67 |
| E1                          | 0.245                           | -   | -            | 6.22   | -   | -     |
| e                           | .100 BSC                        |     |              | 2.54 BSC   |     |       |
| H                           | 0.575                           | -   | 0.625        | 14.61  | -   | 15.88 |
| L                           | 0.070                           | -   | 0.110        | 1.78   | -   | 2.79  |
| L1                          | -                               | -   | 0.066        | -  | -   | 1.68  |
| L3                          | .010 BSC                        |     |              | 0.25 BSC   |     |       |
| θ                           | 0°                              | -   | 8°           | 0°   | -   | 8°    |
| SIPEX Pkg Signoff Date/Rev: |                                 |     |              | JL Aug5-05 / Rev A                                     |     |       |

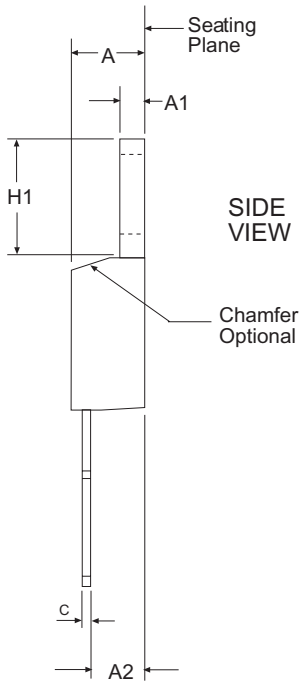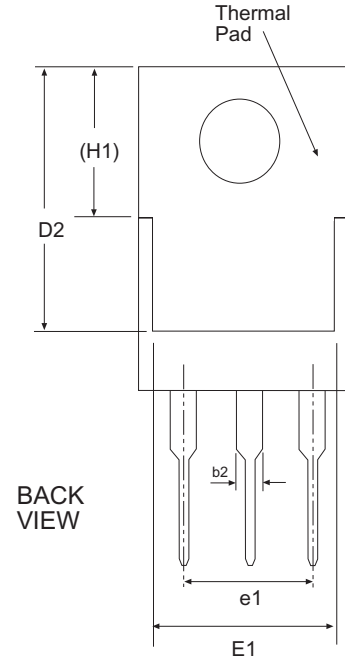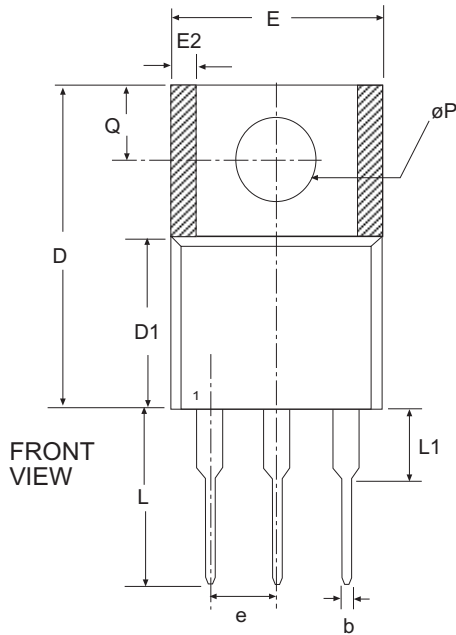

| SYMBOL                      | 3 Pin TO-220                                   |       |       | JEDEC TO-220  |      |       | Variation AB       |     |     |
|-----------------------------|--|-------|-------|---|------|-------|--------------------|-----|-----|
|                             | Dimensions in Inches:<br>Controlling Dimension |       |       | Dimensions in Millimeters:<br>Conversion Factor:<br>1 Inch = 25.40 mm |      |       |                    |     |     |
|                             | MIN  | NOM   | MAX   | MIN   | NOM  | MAX   | MIN                | NOM | MAX |
| A                           | 0.140  | -     | 0.190 | 3.56  | -    | 4.83  |                    |     |     |
| A1                          | 0.020  | -     | 0.055 | 0.51  | -    | 1.27  |                    |     |     |
| A2                          | 0.080  | -     | 0.115 | 2.03  | -    | 2.79  |                    |     |     |
| b                           | 0.015  | 0.027 | 0.040 | 0.25  | 0.51 | 1.02  |                    |     |     |
| b2                          | 0.045  | 0.057 | 0.070 | 1.14  | 1.45 | 1.78  |                    |     |     |
| c                           | 0.014  | -     | 0.024 | 0.25  | -    | 0.51  |                    |     |     |
| D                           | 0.560  | -     | 0.650 | 14.22   | -    | 16.51 |                    |     |     |
| D1                          | 0.330  | -     | 0.355 | 8.38  | -    | 8.89  |                    |     |     |
| D2                          | 0.480  | -     | 0.507 | 12.19   | -    | 12.70 |                    |     |     |
| E                           | 0.380  | -     | 0.420 | 9.65  | -    | 10.67 |                    |     |     |
| E1                          | 0.270  | -     | 0.350 | 6.86  | -    | 8.89  |                    |     |     |
| E2                          | -  | -     | 0.030 | -   | -    | 0.76  |                    |     |     |
| e                           | .100 BSC                                       |       |       | 2.54 BSC  |      |       |                    |     |     |
| e1                          | .200 BSC                                       |       |       | 5.08 BSC  |      |       |                    |     |     |
| H1                          | 0.230  | -     | 0.270 | 5.84  | -    | 6.86  |                    |     |     |
| L                           | 0.500  | -     | 0.580 | 12.70   | -    | 14.73 |                    |     |     |
| L1                          | -  | -     | 0.250 | -   | -    | 6.35  |                    |     |     |
| $\phi P$                    | 0.139  | -     | 0.161 | 3.30  | -    | 4.06  |                    |     |     |
| Q                           | 0.100  | -     | 0.135 | 2.54  | -    | 3.30  |                    |     |     |
| SIPEX Pkg Signoff Date/Rev: |  |       |       |   |      |       | JL Aug4-05 / Rev A |     |     |

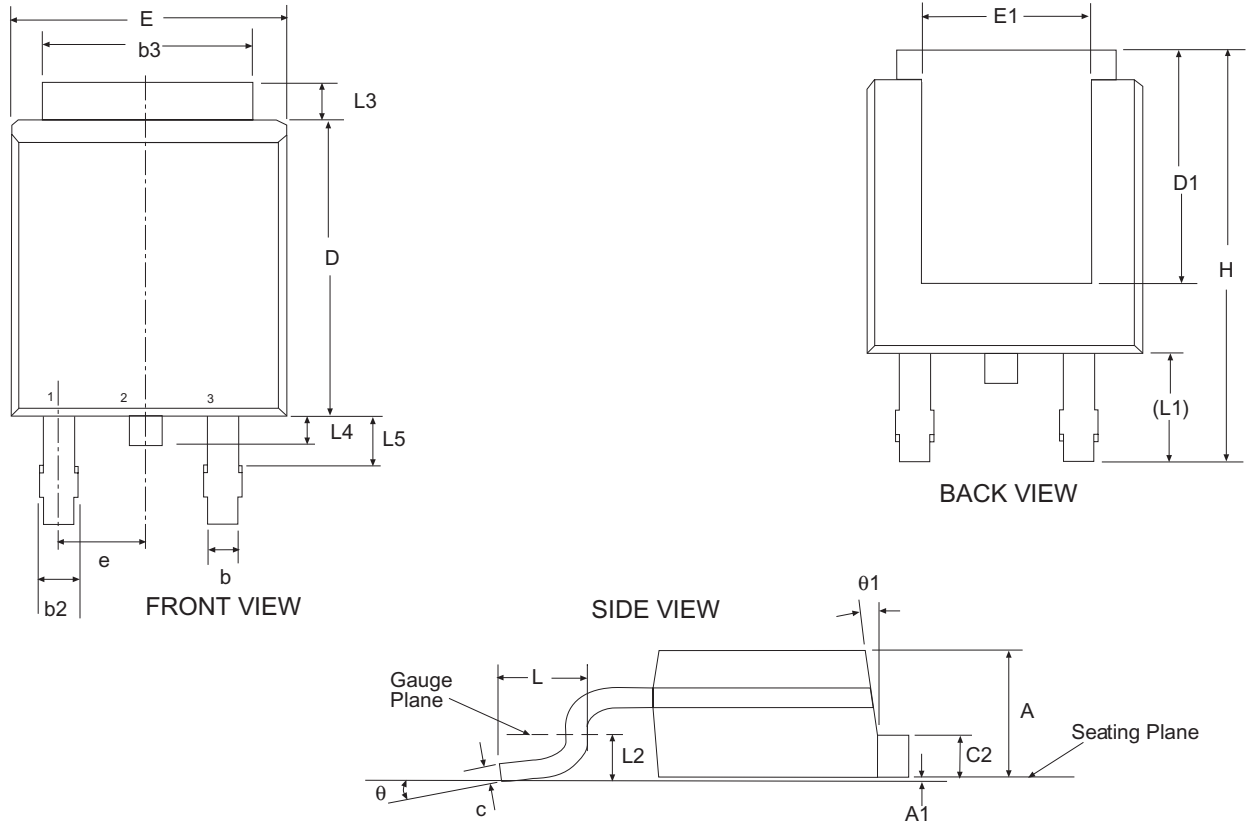

| 3 Pin TO-252                |  | JEDEC TO-252 |       | Variation AA   |      |       |
|-----------------------------|--|--------------|-------|--|------|-------|
| SYMBOL                      | Dimensions in Inches:<br>Controlling Dimension |              |       | Dimensions in Millimeters<br>Conversion Factor:<br>1 Inch = 25.40 mm |      |       |
|                             | MIN  | NOM          | MAX   | MIN  | NOM  | MAX   |
| A                           | 0.086  | -            | 0.094 | 2.18   | -    | 2.39  |
| A1                          | -  | -            | 0.005 | -  | -    | 0.13  |
| b                           | 0.025  | -            | 0.035 | 0.64   | -    | 0.89  |
| b2                          | 0.030  | -            | 0.045 | 0.76   | -    | 1.14  |
| b3                          | 0.195  | -            | 0.215 | 4.95   | -    | 5.46  |
| c                           | 0.018  | -            | 0.024 | 0.46   | -    | 0.61  |
| c2                          | 0.018  | -            | 0.035 | 0.46   | -    | 0.89  |
| D                           | 0.235  | 0.240        | 0.245 | 5.97   | 6.10 | 6.22  |
| D1                          | 0.205  | -            | -     | 5.21   | -    | -     |
| E                           | 0.250  | -            | 0.265 | 6.35   | -    | 6.73  |
| E1                          | 0.170  | -            | -     | 4.32   | -    | -     |
| e                           | .090 BSC                                       |              |       | 2.29 BSC   |      |       |
| H                           | 0.370  | -            | 0.410 | 9.4  | -    | 10.41 |
| L                           | 0.055  | 0.060        | 0.070 | 1.4  | 1.52 | 1.78  |
| L1                          | .108 REF                                       |              |       | 2.74 REF   |      |       |
| L2                          | .020 BSC                                       |              |       | 0.51 BSC   |      |       |
| L3                          | 0.035  | -            | 0.050 | 0.89   | -    | 1.27  |
| L4                          | -  | -            | 0.040 | -  | -    | 1.02  |
| L5                          | 0.045  | -            | 0.060 | 1.14   | -    | 1.52  |
| $\theta$                    | 0°   | -            | 10°   | 0°   | -    | 10°   |
| $\theta$ 1                  | 0°   | -            | 15°   | 0°   | -    | 15°   |
| SIPEX Pkg Signoff Date/Rev: |  |              |       | JL Aug4-05/Rev A   |      |       |



## ORDERING INFORMATION

| PART NUMBERS           | ACC.     | TOP MARK             | OUTPUT VOLTAGE | PACKAGE       |
|------------------------|----------|----------------------|----------------|---------------|
| SPX2815AR .....        | 1% ..... | SPX2815ARYYWW.....   | Adj .....      | 3 lead TO-252 |
| SPX2815AR/TR .....     | 1% ..... | SPX2815ARYYWW.....   | Adj .....      | 3 lead TO-252 |
| SPX2815AR-2-5 .....    | 1% ..... | SPX2815AR25YYWW..... | 2.5V .....     | 3 lead TO-252 |
| SPX2815AR-2-5/TR ..... | 1% ..... | SPX2815AR25YYWW..... | 2.5V .....     | 3 lead TO-252 |
| SPX2815AR-3-3 .....    | 1% ..... | SPX2815AR33YYWW..... | 3.3V .....     | 3 lead TO-252 |
| SPX2815AR-3-3/TR ..... | 1% ..... | SPX2815AR33YYWW..... | 3.3V .....     | 3 lead TO-252 |
| SPX2815AR-5-0 .....    | 1% ..... | SPX2815AR50YYWW..... | 5.0V .....     | 3 lead TO-252 |
| SPX2815AR-5-0/TR ..... | 1% ..... | SPX2815AR50YYWW..... | 5.0V .....     | 3 lead TO-252 |
| SPX2815AT .....        | 1% ..... | SPX2815ATYYWW.....   | Adj .....      | 3 lead TO-263 |
| SPX2815AT/TR .....     | 1% ..... | SPX2815ATYYWW.....   | Adj .....      | 3 lead TO-263 |
| SPX2815AT-2-5 .....    | 1% ..... | SPX2815AT25YYWW..... | 2.5V .....     | 3 lead TO-263 |
| SPX2815AT-2-5/TR ..... | 1% ..... | SPX2815AT25YYWW..... | 2.5V .....     | 3 lead TO-263 |
| SPX2815AT-3-3 .....    | 1% ..... | SPX2815AT33YYWW..... | 3.3V .....     | 3 lead TO-263 |
| SPX2815AT-3-3/TR ..... | 1% ..... | SPX2815AT33YYWW..... | 3.3V .....     | 3 lead TO-263 |
| SPX2815AT-5-0 .....    | 1% ..... | SPX2815AT50YYWW..... | 5.0V .....     | 3 lead TO-263 |
| SPX2815AT-5-0/TR ..... | 1% ..... | SPX2815AT50YYWW..... | 5.0V .....     | 3 lead TO-263 |
| SPX2815AU .....        | 1% ..... | SPX2815AUYYWW.....   | Adj .....      | 3 lead TO-220 |
| SPX2815AU-2-5 .....    | 1% ..... | SPX2815AU25YYWW..... | 2.5V .....     | 3 lead TO-220 |
| SPX2815AU-3-3 .....    | 1% ..... | SPX2815AU33YYWW..... | 3.3V .....     | 3 lead TO-220 |
| SPX2815AU-5-0 .....    | 1% ..... | SPX2815AU50YYWW..... | 5.0V .....     | 3 lead TO-220 |

Available in lead free packaging. To order add “-L” suffix to part number.

Example: SPX2815AU-5-0 = standard; SPX2815AU-L -5-0/TR = lead free.

Pack quantity is 500 for TO-263 and 2,000 for TO-252.

/TR = Tape and Reel



Solved By Sipex™

### Sipex Corporation

#### Headquarters and Sales Office

233 South Hillview Drive  
Milpitas, CA 95035  
TEL: (408) 934-7500  
FAX: (408) 935-7600

Sipex Corporation reserves the right to make changes to any products described herein. Sipex does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others.

|                       |    |       |                               |               |
|-----------------------|----|-------|-------------------------------|---------------|
| SPX2815R .....        | 2% | ..... | SPX2815RYYWW.....Adj .....    | 3 lead TO-252 |
| SPX2815R/TR .....     | 2% | ..... | SPX2815RYYWW.....Adj .....    | 3 lead TO-252 |
| SPX2815R-2-5 .....    | 2% | ..... | SPX2815R25YYWW.....2.5V ..... | 3 lead TO-252 |
| SPX2815R-2-5/TR ..... | 2% | ..... | SPX2815R25YYWW.....2.5V ..... | 3 lead TO-252 |
| SPX2815R-3-3 .....    | 2% | ..... | SPX2815R33YYWW.....3.3V ..... | 3 lead TO-252 |
| SPX2815R-3-3/TR ..... | 2% | ..... | SPX2815R33YYWW.....3.3V ..... | 3 lead TO-252 |
| SPX2815R-5-0 .....    | 2% | ..... | SPX2815R50YYWW.....5.0V ..... | 3 lead TO-252 |
| SPX2815R-5-0/TR ..... | 2% | ..... | SPX2815R50YYWW.....5.0V ..... | 3 lead TO-252 |
| SPX2815T .....        | 2% | ..... | SPX2815TYYWW.....Adj .....    | 3 lead TO-263 |
| SPX2815T/TR .....     | 2% | ..... | SPX2815TYYWW.....Adj .....    | 3 lead TO-263 |
| SPX2815T-2-5 .....    | 2% | ..... | SPX2815T25YYWW.....2.5V ..... | 3 lead TO-263 |
| SPX2815T-2-5/TR ..... | 2% | ..... | SPX2815T25YYWW.....2.5V ..... | 3 lead TO-263 |
| SPX2815T-3-3 .....    | 2% | ..... | SPX2815T33YYWW.....3.3V ..... | 3 lead TO-263 |
| SPX2815T-3-3/TR ..... | 2% | ..... | SPX2815T33YYWW.....3.3V ..... | 3 lead TO-263 |
| SPX2815T-5-0 .....    | 2% | ..... | SPX2815T50YYWW.....5.0V ..... | 3 lead TO-263 |
| SPX2815T-5-0/TR ..... | 2% | ..... | SPX2815T50YYWW.....5.0V ..... | 3 lead TO-263 |
| SPX2815U .....        | 2% | ..... | SPX2815UYYYWW.....Adj .....   | 3 lead TO-220 |
| SPX2815U-2-5 .....    | 2% | ..... | SPX2815U25YYWW.....2.5V ..... | 3 lead TO-220 |
| SPX2815U-3-3 .....    | 2% | ..... | SPX2815U33YYWW.....3.3V ..... | 3 lead TO-220 |
| SPX2815U-5-0 .....    | 2% | ..... | SPX2815U50YYWW.....5.0V ..... | 3 lead TO-220 |

**Available in lead free packaging. To order add “-L” suffix to part number.**

**Example: SPX2815U-5-0 = standard; SPX2815U-L -5-0/TR = lead free.**

Pack quantity is 500 for TO-263 and 2,000 for TO-252.

/TR = Tape and Reel



**Sipex Corporation**

**Headquarters and  
Sales Office**

233 South Hillview Drive  
Milpitas, CA 95035  
TEL: (408) 934-7500  
FAX: (408) 935-7600

Sipex Corporation reserves the right to make changes to any products described herein. Sipex does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others.