


Features

1.6(L)x0.8(W)x0.6(H)mm Size
 InGaAlP Technology
 High Luminous Intensity
 Low Power Consumption
 Suitable for Backlighting

Applications

Mobile Phone
 Portable VCR
 Camera
 General Backlighting

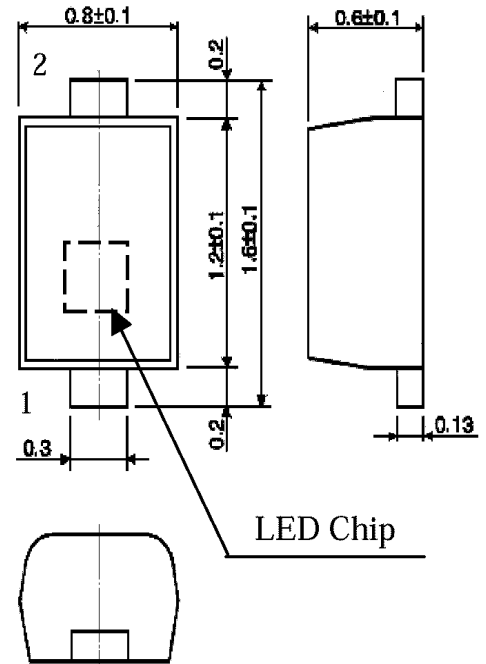

1.CATHODE

2.ANODE

TOLERANCE: ± 0.1 mm

Series Line-Up

Part Number	Color	Material
TLGU1020	Ultra Bright Yellow Green	InGaAlP
TLOU1020	Ultra Bright Orange	InGaAlP
TLPGU1020	Ultra Pure Green	InGaAlP
TLSU1020	Ultra High Efficiency Red	InGaAlP
TLYU1020	Ultra Bright Yellow	InGaAlP

Maximum Ratings (Ta=25°C)

Part Number	Forward Current I _F	Reverse Voltage V _R	Power Dissipation P _D	Operating Temperature T _{opr}	Storage Temperature T _{stg}
TLGU1020	25	4	60.00	-40 ~ +100	-40 ~ +100
TLOU1020	25	4	60.00	-40 ~ +100	-40 ~ +100
TLPGU1020	25	4	60.00	-40 ~ +100	-40 ~ +100
TLSU1020	25	4	60.00	-40 ~ +100	-40 ~ +100
TLYU1020	25	4	60.00	-40 ~ +100	-40 ~ +100
Unit	mA	V	mW	°C	°C

Company Headquarters
 3 Norhway Lane North
 Latham, New York 12110
 Toll Free: 800.984.5337
 Fax: 518.785.4725




Web: www.marktechopt.com | Email: info@marktechopt.com

West Coast Sales Office
 950 South Coast Drive, Suite 265
 Costa Mesa, California 92626
 Toll Free: 800.984.5337
 Fax: 714.850.9314

Electrical and Optical Characteristics (Ta=25°C)

Part Number	PWL nm λ_P	Material	View Angle $2\theta_{1/2}$	Luminous Intensity I_v				Forward Voltage V_F				Rev Current I_R	
				min.	typ.	max.	IF@	min.	typ.	max.	IF@	max.	VR@
TLGU1020	574	InGaAlP	165° x 140°	8.50	18.00	-	20mA	-	2.10	2.40	20mA	10	4V
TLOU1020	612	InGaAlP	165° x 140°	27.20	85.00	-	20mA	-	2.10	2.40	20mA	10	4V
TLPGU1020	562	InGaAlP	165° x 140°	1.53	4.00	-	20mA	-	2.10	2.40	20mA	10	4V
TLSU1020	636	InGaAlP	165° x 140°	27.20	70.00	-	20mA	-	2.10	2.40	20mA	10	4V
TLYU1020	590	InGaAlP	165° x 140°	27.20	60.00	-	20mA	-	2.10	2.40	20mA	10	4V
-	nm	-	deg	mcd				-	V		-	μA	-

Recommended soldering pattern

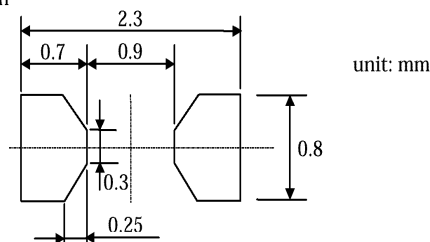

NOTICE:

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
- In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

Company Headquarters
 3 Norhway Lane North
 Latham, New York 12110
 Toll Free: 800.984.5337
 Fax: 518.785.4725


 Web: www.marktechopto.com | Email: info@marktechopto.com

West Coast Sales Office
 950 South Coast Drive, Suite 265
 Costa Mesa, California 92626
 Toll Free: 800.984.5337
 Fax: 714.850.9314

PACKAGING

This LED device is packed in an aluminum envelope with silica-gel to avoid moisture absorption. The optical characteristics may be affected by exposure to moisture in the air before soldering and should be stored under the following conditions.

Temperature : 5~30°C
Relative humidity : 60% max.
Time : 168h


Baking is required if the device has been stored unopened for more than 6 months or if the aluminum envelope has been opened for more than 168h.

Recommended baking condition is 60°C for 12 hours minimum in a dry atmosphere.


SOLDERING

Reflow soldering

Temperature profile

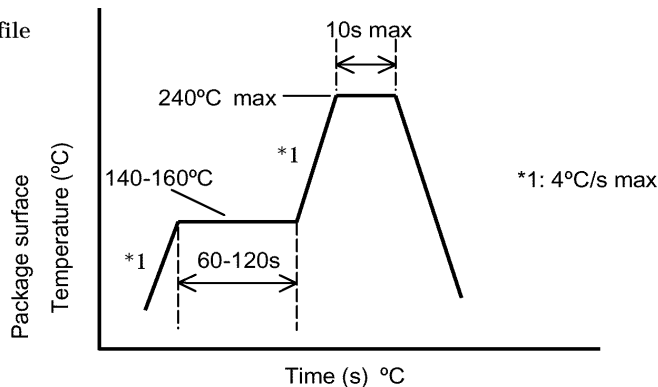

Recommended soldering pattern

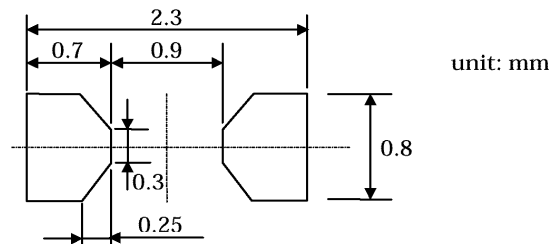

Please perform the first reflow soldering within 168h after opening the package with reference to the above temperature profile.

Second time reflow soldering

In the case of a second time reflow soldering, it should be performed within 168h after first reflow under the above conditions.

Storage conditions before second reflow soldering : 30°C, 60%RH or lower

Do not perform flow soldering.

Recommended for manual soldering

Soldering iron : Less than 25W
Temperature : Lower than 30°C
Time : Within 3s(Up to 1 time per place)






Company Headquarters
3 Norway Lane North
Latham, New York 12110
Toll Free: 800.984.5337
Fax: 518.785.4725

Marktech
Optoelectronics

Web: www.marktechopt.com | Email: info@marktechopt.com

West Coast Sales Office
950 South Coast Drive, Suite 265
Costa Mesa, California 92626
Toll Free: 800.984.5337
Fax: 714.850.9314

TLGU1020 Graphs

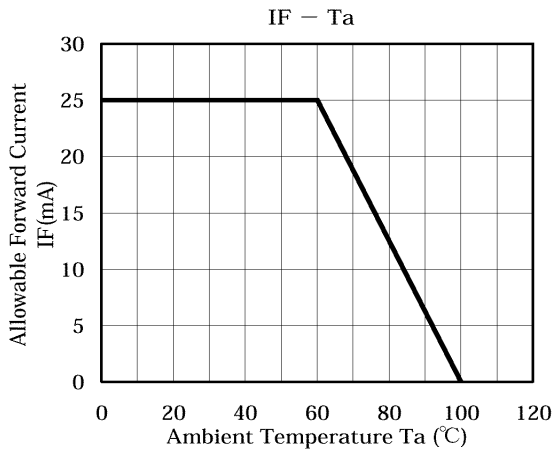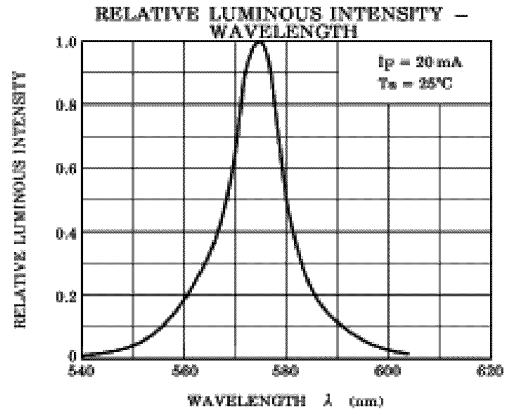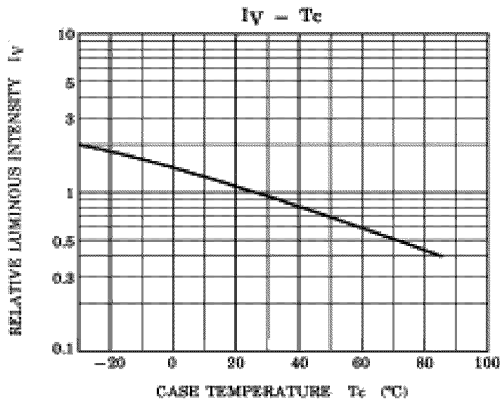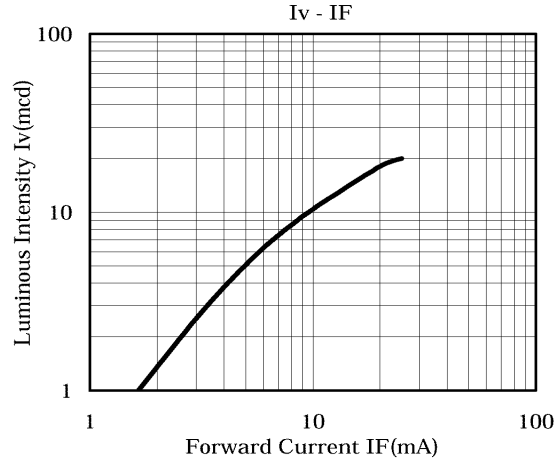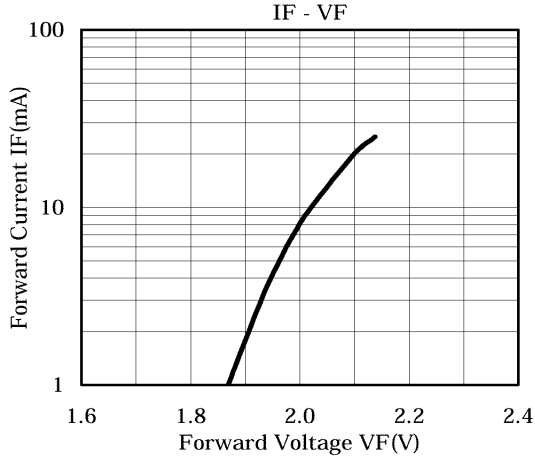






Company Headquarters
 3 Norway Lane North
 Latham, New York 12110
 Toll Free: 800.984.5337
 Fax: 518.785.4725

Marktech
 Optoelectronics

Web: www.marktechopt.com | Email: info@marktechopt.com

West Coast Sales Office
 950 South Coast Drive, Suite 265
 Costa Mesa, California 92626
 Toll Free: 800.984.5337
 Fax: 714.850.9314

TLOU1020 Graphs

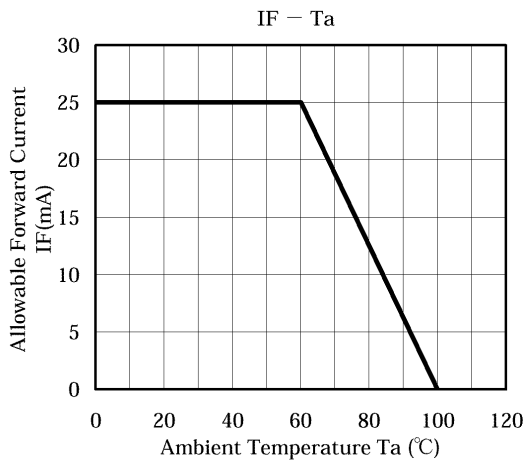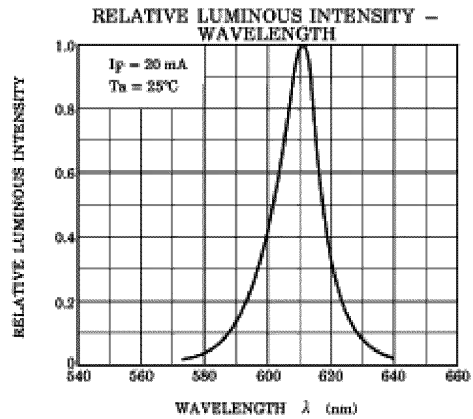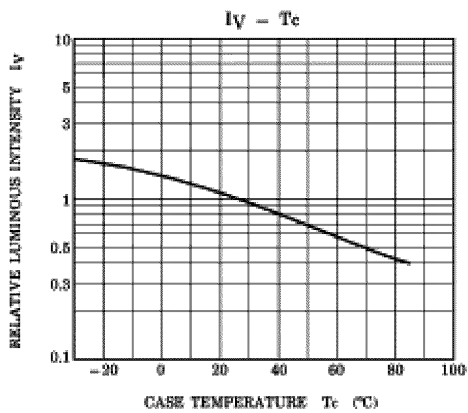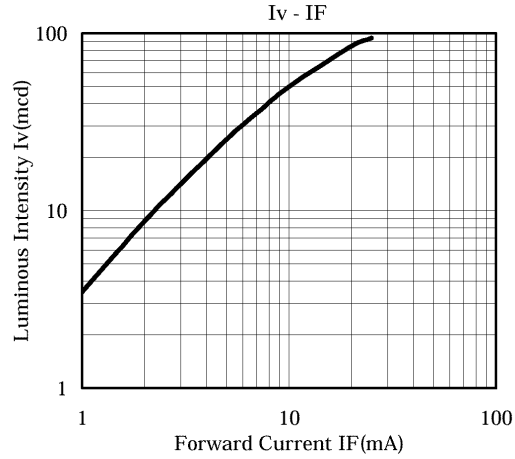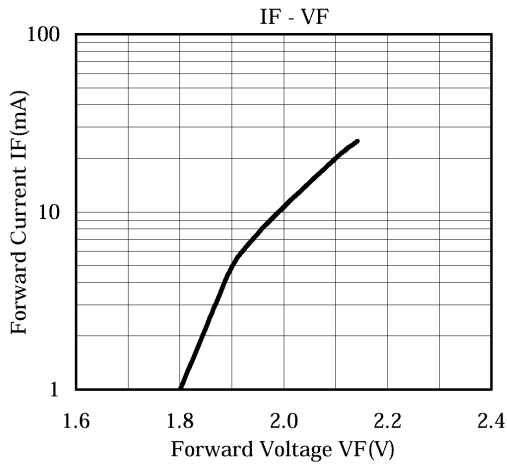






Company Headquarters
 3 Norway Lane North
 Latham, New York 12110
 Toll Free: 800.984.5337
 Fax: 518.785.4725

Marktech
 Optoelectronics

Web: www.marktechopt.com | Email: info@marktechopt.com

West Coast Sales Office
 950 South Coast Drive, Suite 265
 Costa Mesa, California 92626
 Toll Free: 800.984.5337
 Fax: 714.850.9314

TLPGU1020 Graphs

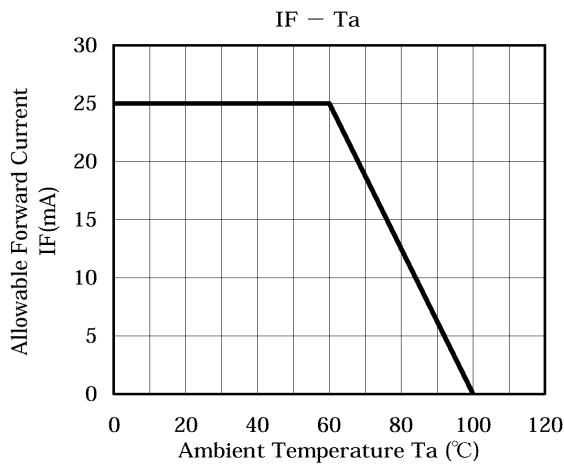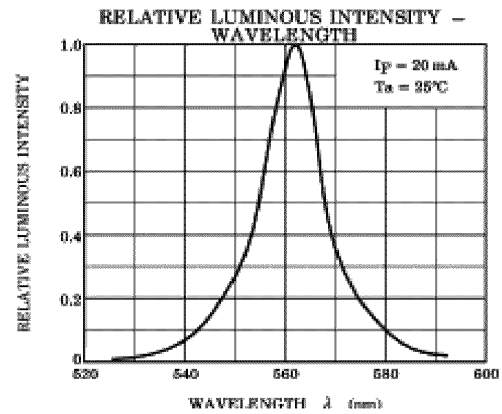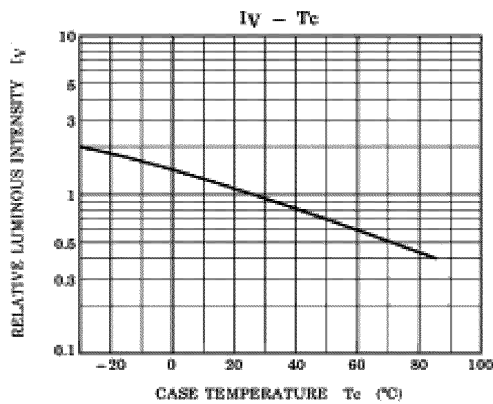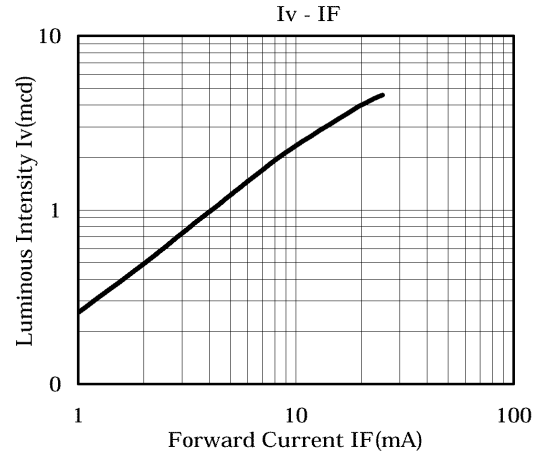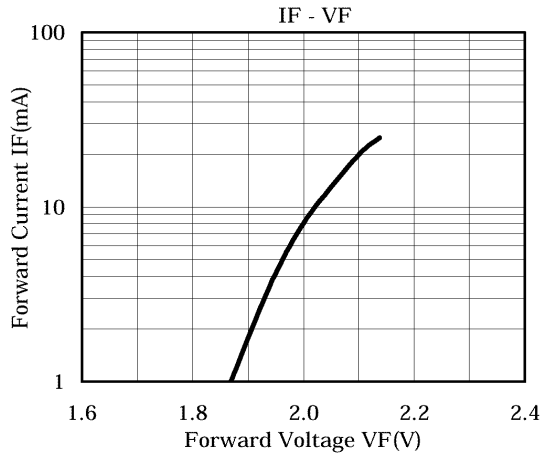






Company Headquarters
 3 Norhway Lane North
 Latham, New York 12110
 Toll Free: 800.984.5337
 Fax: 518.785.4725

Marktech
 Optoelectronics

Web: www.marktechopt.com | Email: info@marktechopt.com

West Coast Sales Office
 950 South Coast Drive, Suite 265
 Costa Mesa, California 92626
 Toll Free: 800.984.5337
 Fax: 714.850.9314

TLxU1020 Graphs

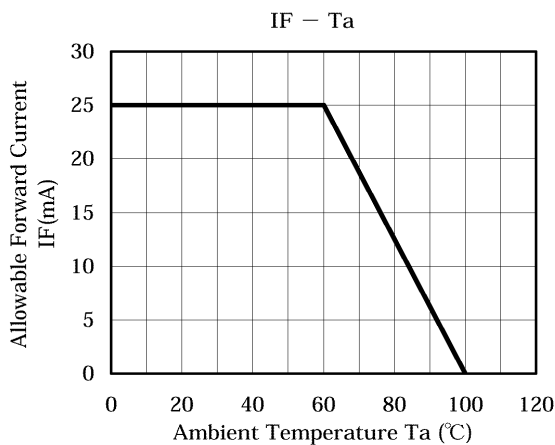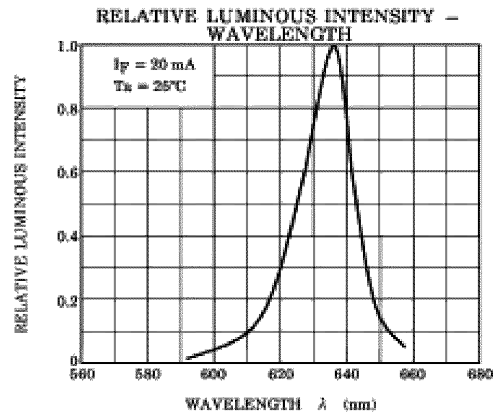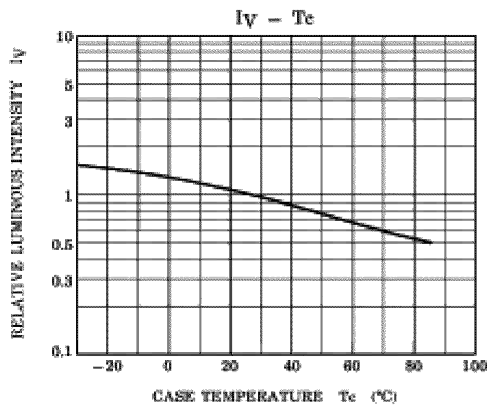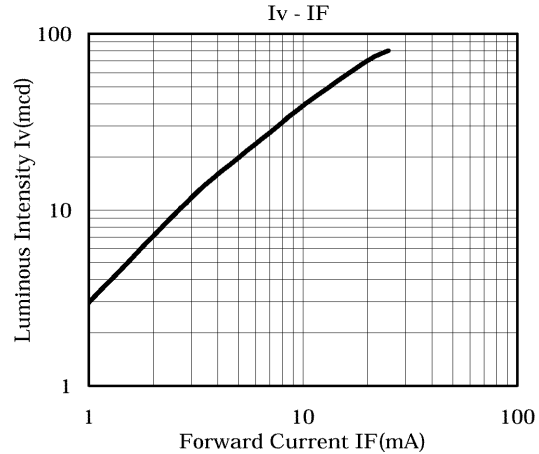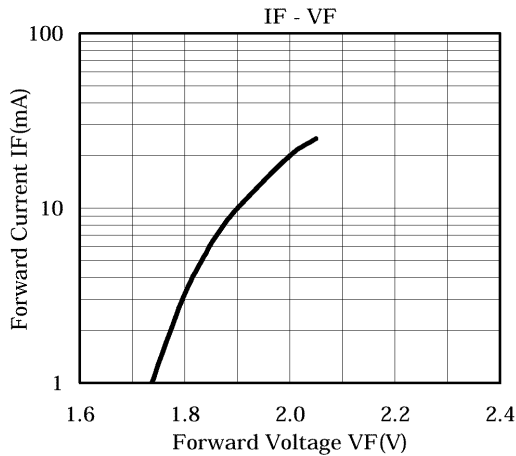






Company Headquarters
 3 Norway Lane North
 Latham, New York 12110
 Toll Free: 800.984.5337
 Fax: 518.785.4725

Marktech
 Optoelectronics

Web: www.marktechopt.com | Email: info@marktechopt.com

West Coast Sales Office
 950 South Coast Drive, Suite 265
 Costa Mesa, California 92626
 Toll Free: 800.984.5337
 Fax: 714.850.9314

TLYU1020 Graphs

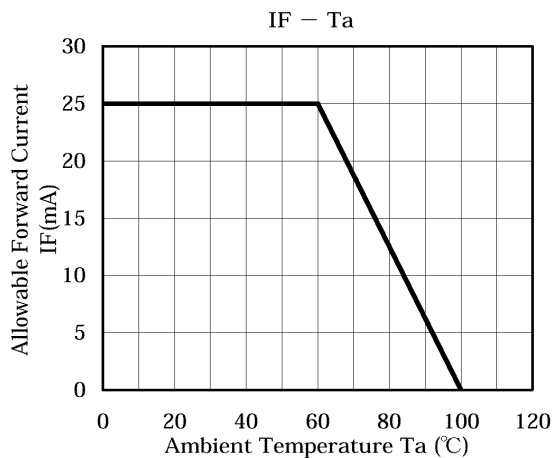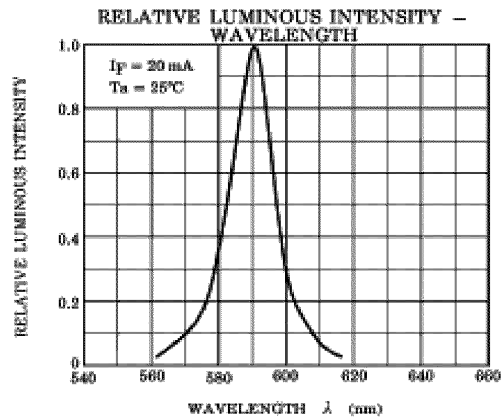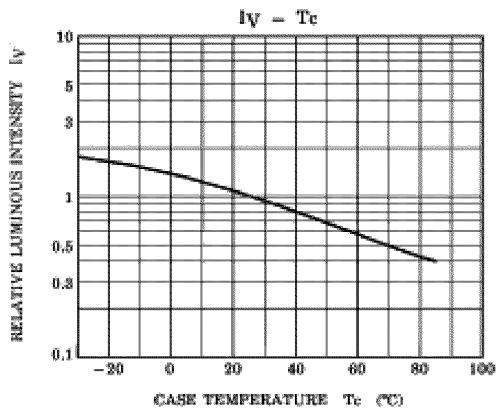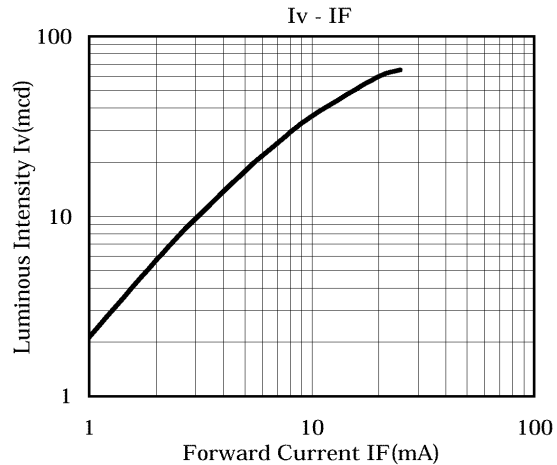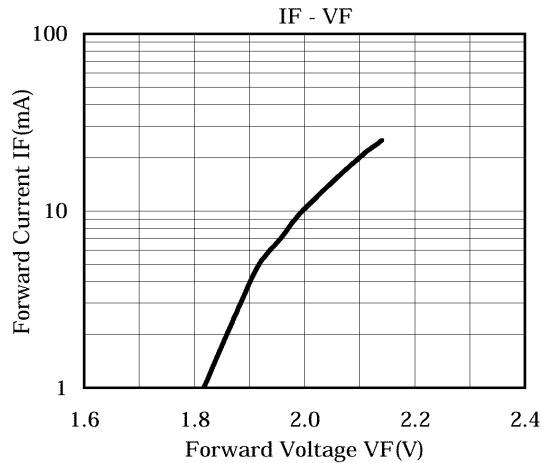


Company Headquarters
 3 Norhway Lane North
 Latham, New York 12110
 Toll Free: 800.984.5337
 Fax: 518.785.4725

Marktech
 Optoelectronics

Web: www.marktechopt.com | Email: info@marktechopt.com

West Coast Sales Office
 950 South Coast Drive, Suite 265
 Costa Mesa, California 92626
 Toll Free: 800.984.5337
 Fax: 714.850.9314

TLxU1020 Radiation Pattern Graphs

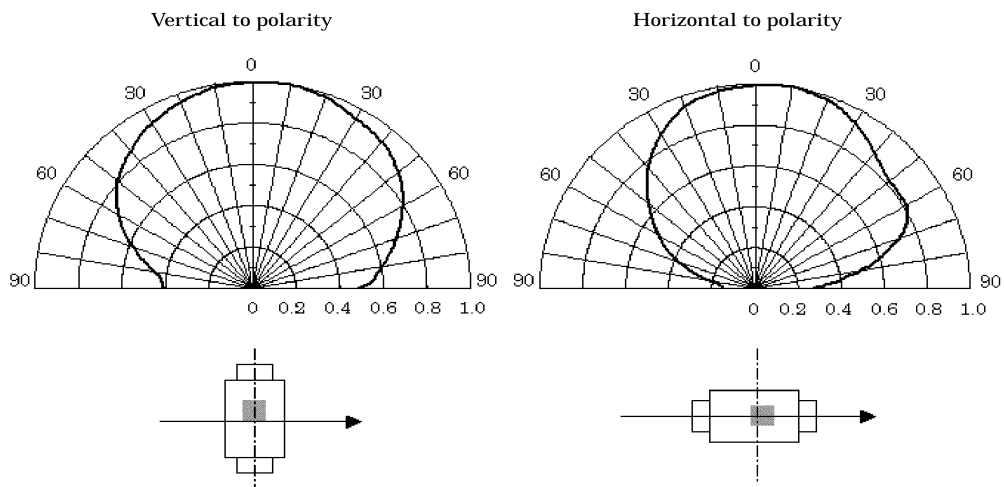

Company Headquarters
3 Norway Lane North
Latham, New York 12110
Toll Free: 800.984.5337
Fax: 518.785.4725

 **Marktech**
Optoelectronics

Web: www.marktechopto.com | Email: info@marktechopto.com

West Coast Sales Office
950 South Coast Drive, Suite 265
Costa Mesa, California 92626
Toll Free: 800.984.5337
Fax: 714.850.9314