

# Am29861 - 64

High Performance Bus Transceivers

## DISTINCTIVE CHARACTERISTICS

- High-speed symmetrical bidirectional transceivers
  - Noninverting  $t_{PD} = 5.0\text{ns typ}$
  - Inverting  $t_{PD} = 4.5\text{ns typ}$
- 200mV minimum input hysteresis on input data ports
- Three-state outputs glitch-free during power-up and down. Outputs have Schottky clamp to ground
- 48mA commercial  $I_{OL}$ , 32mA military  $I_{OL}$
- Low input/output capacitance
- $I_{OH}$  specified 2.0V and 2.4V


## GENERAL DESCRIPTION

The Am29860 Series bus transceivers provide high performance bus interface buffering for wide data/address paths or buses carrying parity. The Am29863/64 9-bit transceivers have NOR-ed output enables for maximum control flexibility. All transceiver data inputs have 200mV minimum input hysteresis to provide improved noise rejection.

All of the Am29800 high performance interface family are designed for high capacitance load drive capability while providing low capacitance bus loading at both inputs and outputs. All inputs are Schottky diode inputs, and all outputs are designed for low capacitance bus loading in the high impedance state.

## BLOCK DIAGRAM

### Am29861/Am29862 10-BIT TRANSCEIVERS

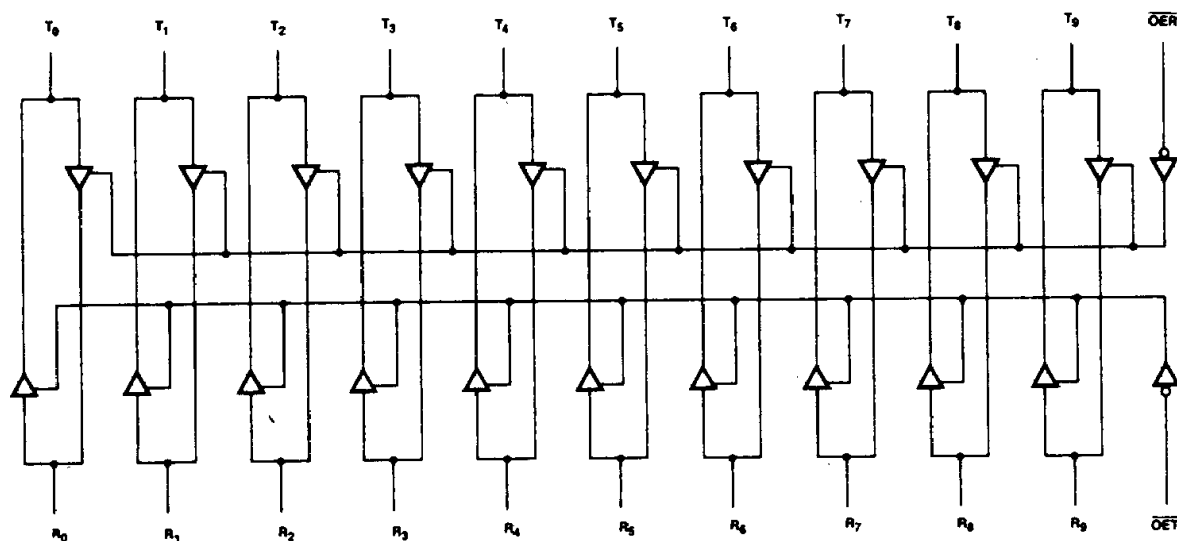


BD001060

8


### CONNECTION DIAGRAM Top View

#### Am29861/Am29862 10-BIT TRANSCEIVERS

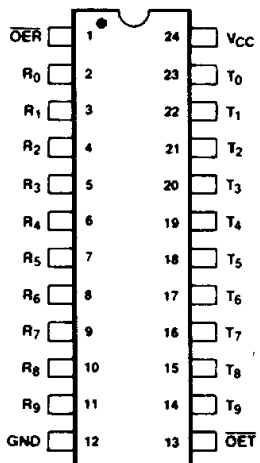

CD001150

### LOGIC SYMBOL




Am29861 (NONINVERTING)

LS000370

### ORDERING INFORMATION

AMD products are available in several packages and operating ranges. The order number is formed by a combination of the following: Device number, speed option (if applicable), package type, operating range and screening option (if desired).

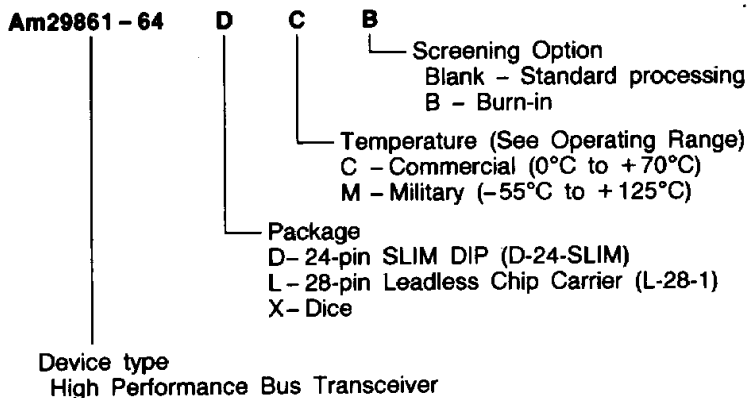


Valid Combinations	
Am29861	DC, DCB, DM, DMB
Am29862	LC, LCB, LM, LMB
Am29863	
Am29864	XC, XM

#### Valid Combinations

Consult the AMD sales office in your area to determine if a device is currently available in the combination you wish.


**CONNECTION DIAGRAM  
Top View**

**Am29863/Am29864 9-BIT TRANSCEIVERS**

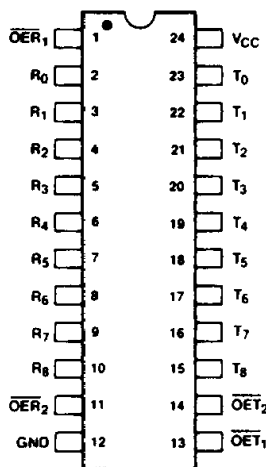

GD001140

**LOGIC SYMBOL**



Am29863 (NONINVERTING)  
LS000380

## PIN DESCRIPTION

Pin No.	Name	I/O	Description
<b>Am29861/Am29862</b>			
1	$\overline{OER}$	I	When LOW in conjunction with $\overline{OET}$ HIGH activates the RECEIVE mode.
13	$\overline{OET}$	I	When LOW in conjunction with $\overline{OER}$ HIGH activates the TRANSMIT mode.
	$R_i$	I/O	10-bit RECEIVE input/output.
	$T_i$	I/O	10-bit TRANSMIT input/output.
<b>Am29863/Am29864</b>			
	$\overline{OER}_i$	I	When both are LOW in conjunction with any $\overline{OET}_i$ HIGH indicates the RECEIVE mode.
	$\overline{OET}_i$	I	When both are LOW in conjunction with any $\overline{OER}_i$ HIGH indicates the TRANSMIT mode.
	$R_i$	I/O	9-bit RECEIVE input/output.
	$T_i$	I/O	9-bit TRANSMIT input/output.

## FUNCTION TABLES

**Am29861/Am2983 (Noninverting)**

Inputs				Outputs		Function
$\overline{OET}$	$\overline{OER}$	$R_i$	$T_i$	$R_i$	$T_i$	
L	H	L	N/A	N/A	L	Transmitting
L	H	H	N/A	N/A	H	Transmitting
H	L	N/A	L	L	N/A	Receiving
H	L	N/A	H	H	N/A	Receiving
H	H	X	X	Z	Z	Hi-Z


**Am29862/Am29864 (Inverting)**

Inputs				Outputs		Function
$\overline{OET}$	$\overline{OER}$	$R_i$	$\overline{T}_i$	$R_i$	$\overline{T}_i$	
L	H	L	N/A	N/A	H	Transmitting
L	H	H	N/A	N/A	L	Transmitting
H	L	N/A	L	H	N/A	Receiving
H	L	N/A	H	L	N/A	Receiving
H	H	X	X	Z	Z	Hi-Z

H = HIGH  
L = LOW  
Z = High Impedance

X = Don't Care  
N/A = Not Applicable

**Am29863/Am29864  
9-BIT TRANSCEIVERS**

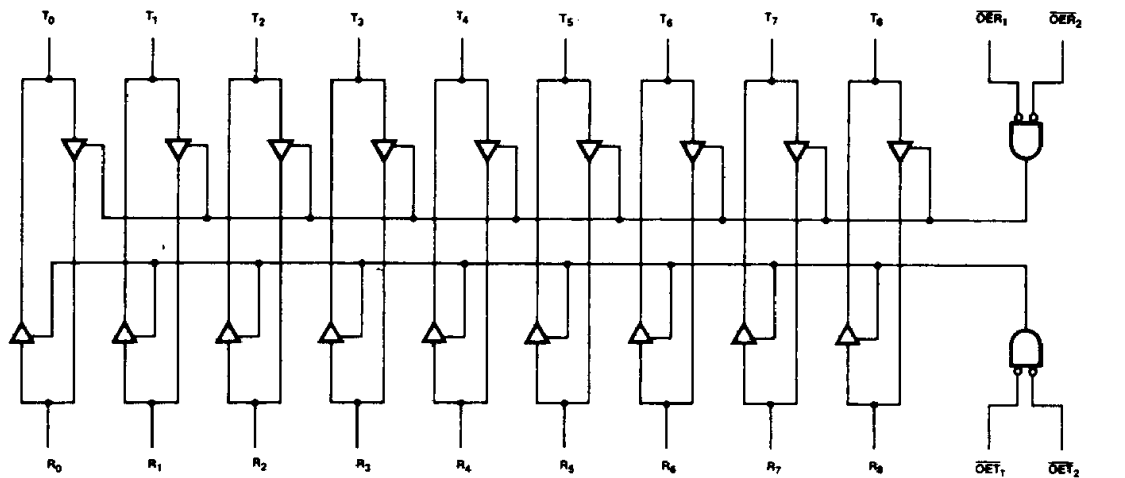

BD001070

**ABSOLUTE MAXIMUM RATINGS**

Storage Temperature .....	-65°C to +150°C
Ambient Temperature with Power Applied .....	-55°C to +125°C
Supply Voltage to Ground Potential Continuous .....	-0.5V to +7.0V
DC Voltage Applied to Output for High Output State .....	-1.5V to $V_{CCmax}$
DC Input voltage .....	-0.5V to +5.5V
DC Output Current, Into Outputs .....	100mA
DC Input Current .....	-30mA to +5.0mA

Stresses above those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent device failure. Functionality at or above these limits is not implied. Exposure to absolute maximum ratings for extended periods may affect device reliability.

**OPERATING RANGES**

## Commercial (C) Devices

Temperature .....	0°C to +70°C
Supply Voltage .....	+4.75V to +5.25V

## Military (M) Devices


Temperature .....	-55°C to +125°C
Supply Voltage .....	+4.5V to +5.5V

Operating ranges define those limits over which the functionality of the device is guaranteed.

**DC CHARACTERISTICS** over operating range unless otherwise specified

Parameter	Description	Test Conditions	Min	Typ	Max	Units	
V <sub>OH</sub>	Output HIGH Voltage	V <sub>CC</sub> = MIN V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub>	I <sub>OH</sub> = -15mA	2.4			V
			I <sub>OH</sub> = -24mA	2.0			
V <sub>OL</sub>	Output LOW Voltage	V <sub>CC</sub> = MIN V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub>	MIL, I <sub>OL</sub> = 32mA			0.5	V
			COM'L, I <sub>OL</sub> = 48mA			0.5	
V <sub>IH</sub>	Input HIGH Level	Guaranteed input logical HIGH voltage for all inputs	2.0			V	
V <sub>IL</sub>	Input LOW Level	Guaranteed input logical LOW voltage for all inputs			0.8	V	
V <sub>I</sub>	Input Clamp Voltage	V <sub>CC</sub> = MIN, I <sub>IN</sub> = -18mA			-1.2	V	
V <sub>HYST</sub>	Input Hysteresis	Tested output is connected to AC load test circuit	200			mV	
I <sub>IL</sub>	Input LOW Current	V <sub>CC</sub> = MAX, V <sub>IN</sub> = 0.4V			-1.0	mA	
I <sub>IH</sub>	Input HIGH Current	V <sub>CC</sub> = MAX, V <sub>IN</sub> = 2.7V			50	μA	
I <sub>I</sub>	Input HIGH Current	V <sub>CC</sub> = MAX, V <sub>IN</sub> = 5.5V			1.0	mA	
I <sub>OZH</sub>	Output Off-State Output Current (HI-Z)	V <sub>CC</sub> = MAX, V <sub>O</sub> = 2.4V			50	μA	
I <sub>OZL</sub>	Output Off-State Output Current (HI-Z)	V <sub>CC</sub> = MAX, V <sub>O</sub> = 0.4V			-1.0	mA	
I <sub>SC</sub>	Output Short Circuit Current	V <sub>CC</sub> = MAX	-75		-250	mA	
I <sub>CC</sub>	Supply Current	V <sub>CC</sub> = MAX Outputs Open	Over Temperature Range			160	mA
			+70°C			150	
			+125°C			140	

## SWITCHING TEST CIRCUIT

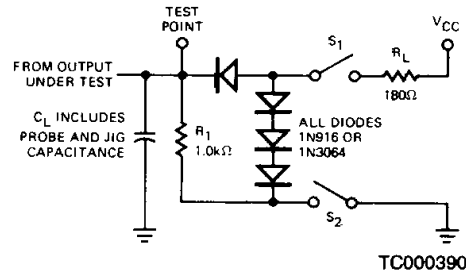

Note: Pulse Generator for All Pulses: Rate  $\leq 10\text{MHz}$ ;  $Z_0 = 50\Omega$ ;  $t_r \leq 2.5\text{ns}$ ;  $t_f \leq 2.5\text{ns}$ .

SWITCHING CHARACTERISTICS ( $T_A = +25^\circ\text{C}$ ,  $V_{CC} = 5.0\text{V}$ )


Parameters	Description	Test Conditions	Min	Typ	Max	Units
$t_{PLH}$	Propagation Delay from $R_i$ to $T_i$ or $T_i$ to $R_i$ Am29861/Am29863 (Noninverting)	$C_L = 50\text{pF}$		4.8	6.0	ns
$t_{PHL}$				5.2	6.2	ns
$t_{PLH}$		$C_L = 300\text{pF}$		8	11	ns
$t_{PHL}$				11	14	ns
$t_{PLH}$	Propagation Delay from $R_i$ to $\bar{T}_i$ or $\bar{T}_i$ to $R_i$ Am29862/Am29864 (Inverting)	$C_L = 50\text{pF}$		4.0	5.2	ns
$t_{PHL}$				4.9	5.9	ns
$t_{PLH}$		$C_L = 300\text{pF}$		7.3	10	ns
$t_{PHL}$				10.5	12.9	ns
$t_{ZH}$	Output Enable Time $\overline{\text{OET}}$ to $T_i$ and $\overline{\text{OER}}$ to $R_i$	$C_L = 50\text{pF}$		6.5	12	ns
$t_{ZL}$				9.5	12	ns
$t_{ZH}$		$C_L = 300\text{pF}$		11	17	ns
$t_{ZL}$				17	21	ns
$t_{HZ}$	Output Disable Time $\text{OET}$ to $T_i$ and $\text{OER}$ to $R_i$	$C_L = 5\text{pF}$		3.5	8.0	ns
$t_{LZ}$				3.5	8.0	ns
$t_{HZ}$		$C_L = 50\text{pF}$		11.2	16	ns
$t_{LZ}$				4.5	9.0	ns

## SWITCHING CHARACTERISTICS over operating range unless otherwise specified


Parameters	Description	Test Conditions	COMMERCIAL		MILITARY		Units
			Min	Max	Min	Max	
$t_{PLH}$	Propagation Delay from $R_i$ to $T_i$ or $T_i$ to $R_i$ Am29861/Am29863 (Noninverting)	$C_L = 50\text{pF}$		8		10	ns
$t_{PHL}$				8		10	ns
$t_{PLH}$		$C_L = 300\text{pF}$		15		17	ns
$t_{PHL}$				15		17	ns
$t_{PLH}$	Propagation Delay from $R_i$ to $\bar{T}_i$ or $\bar{T}_i$ to $R_i$ Am29862/Am29864 (Inverting)	$C_L = 50\text{pF}$		7.0		9.0	ns
$t_{PHL}$				7.5		9.5	ns
$t_{PLH}$		$C_L = 300\text{pF}$		14		16	ns
$t_{PHL}$				14		16	ns
$t_{ZH}$	Output Enable Time $\overline{\text{OET}}$ to $T_i$ or $\overline{\text{OER}}$ to $R_i$	$C_L = 50\text{pF}$		15		17	ns
$t_{ZL}$				15		17	ns
$t_{ZH}$		$C_L = 300\text{pF}$		20		22	ns
$t_{ZL}$				23		25	ns
$t_{HZ}$	Output Disable Time $\overline{\text{OET}}$ to $T_i$ or $\overline{\text{OER}}$ to $R_i$	$C_L = 5\text{pF}$		9		10	ns
$t_{LZ}$				9		10	ns
$t_{HZ}$		$C_L = 50\text{pF}$		17		19	ns
$t_{LZ}$				12		12	ns

## SWITCHING WAVEFORMS

## PROPAGATION DELAY

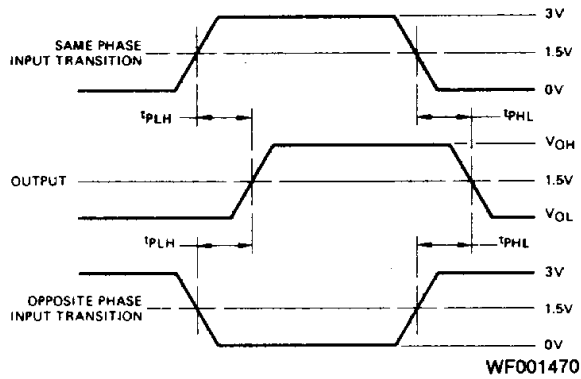

## ENABLE AND DISABLE TIMES

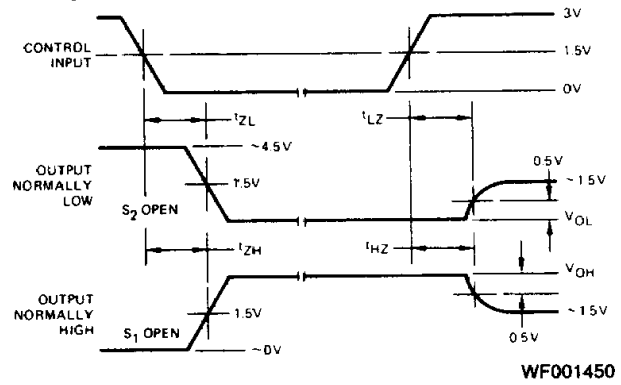

- Notes: 1. Diagram shown for Input Control Enable-LOW and Input Control Disable-HIGH.  
2.  $S_1$  and  $S_2$  of Load Circuit are closed except where shown.