


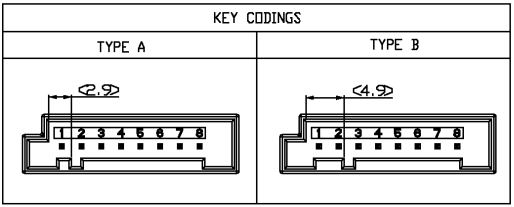

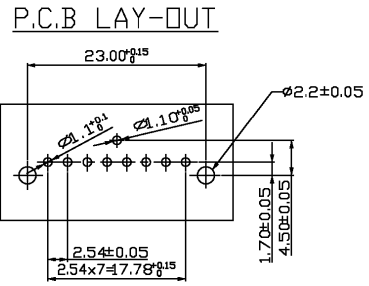




LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
A1		REVISED (ECR-05-018779)	02.JAN.06	CH	JK



ISOMETRIC VIEW



SECTION A-A



- NOTES
 1. PULL-OUT FORCE OF THE CONTACT : Min 25N WHEN V=25mm/min
 2. BE MATED WITH PLUG HSG (P/N : 1743282) SMOOTHLY
 3. GENERAL TOLERANCE : ±0.3, ±3°

NO	DESCRIPTION	CODE	P/N	MATERIAL	COLOR/FINISH	ASSY P/N
2	063 SQUARE CONTACT PIN		0-368314-1	PHOSPHOR BRONZE	TIN	0-1743386-1
1	HEADER HSG	B	1-1743387-6	PBT-GF15	RED	1-1743386-2
1	HEADER HSG	B	1-1743387-3	PBT-GF15	GRAY	1-1743386-3
1	HEADER HSG	B	1-1743387-2	PBT-GF15	BLACK	1-1743386-5
1	HEADER HSG	A	0-1743387-1	PBT-GF15	NATURAL	1-1743386-6

DIMENSIONS: MM 3rd ANGLE PROJECTION MATERIAL: SEE TABLE FINISH: ±		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		DWN OR FILE CHK IN DIE APVD IN DIE PRODUCT SPEC APPLICATION SPEC WEIGHT		tyco Electronics AMP KOREA Kyungsan, Korea NAME: MQS PIN HEADER ASS'Y 8POS(V-TYPE) SIZE: A3 CAGE CODE: 00779 DRAWING NO: 1743386 RESTRICTED TO: 1743386	
SCALE: 2:1				SHEET: 1 OF 1		REV: A1	