

4



3

2

1


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
C2		REVISED PER ECO-11-005140	28MAR11	RK	HMR

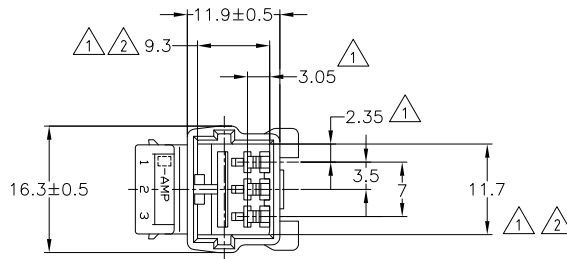

- MUST BE KEPT BETWEEN **-A-** AND 2
- TO BE MATED WITH PLUG HOUSING SMOOTHLY
- APPLIED TAB CONTACT; P/N 173633 AND 173645
- APPLIED PLUG HOUSING; P/N 174921 etc

- A-** 面より 2mm の範囲で測定
- 相手ハウジングと所定の昨日を満足して嵌合できること
- 内装するリセプタクルコンタクトは型番 173633、173645
- 嵌合相手ハウジング型番 174921 他

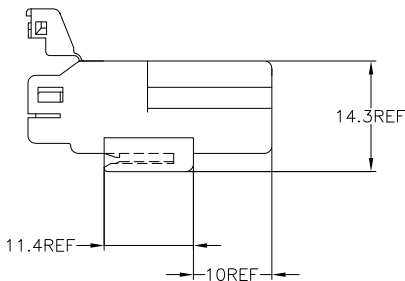

V-2	白 (WHITE)	1-174928-1
HB	黄 (YELLOW)	174928-7
	灰 (GRAY)	174928-6
	青 (BLUE)	174928-5
	緑 (GREEN)	174928-4
	黒 (BLACK)	174928-2
使用材料難燃グレード (FLAMMABILITY OF MATERIAL)	白 (WHITE)	174928-1
	色 (COLOR)	型番 (PART NUMBER)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN S.FUJITA OSDEC08	OSDEC08
		CHK K.BETSUI OSDEC08	OSDEC08
		APVD K.BETSUI OSDEC08	NAME
		PRODUCT SPEC	
		APPLICATION SPEC	
		WEIGHT	
MATERIAL PBT	FINISH	SIZE A3	CAGE CODE 00779
		DRAWING NO	C=174928
		CUSTOMER DRAWING	RESTRICTED TO
		SCALE 2:1	SHEET 1 OF 1
			REV C2

TOLERANCES UNLESS OTHERWISE SPECIFIED:

10 ₃	±0.2
30 ₃	>10 ±0.25
	>30 ±0.3
	ANGLE ±3°