THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,1997 .
© COPYRIGHT 1997 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST
DS	

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REVISED (FC00-0026-03)	17,FEB,03	HS	CS
	B	REVISED (FC00-0058-03)	21,APR,03	YD	CS
	C	REVISED (FC00-0135-03)	19,SEP,03	JW	CS

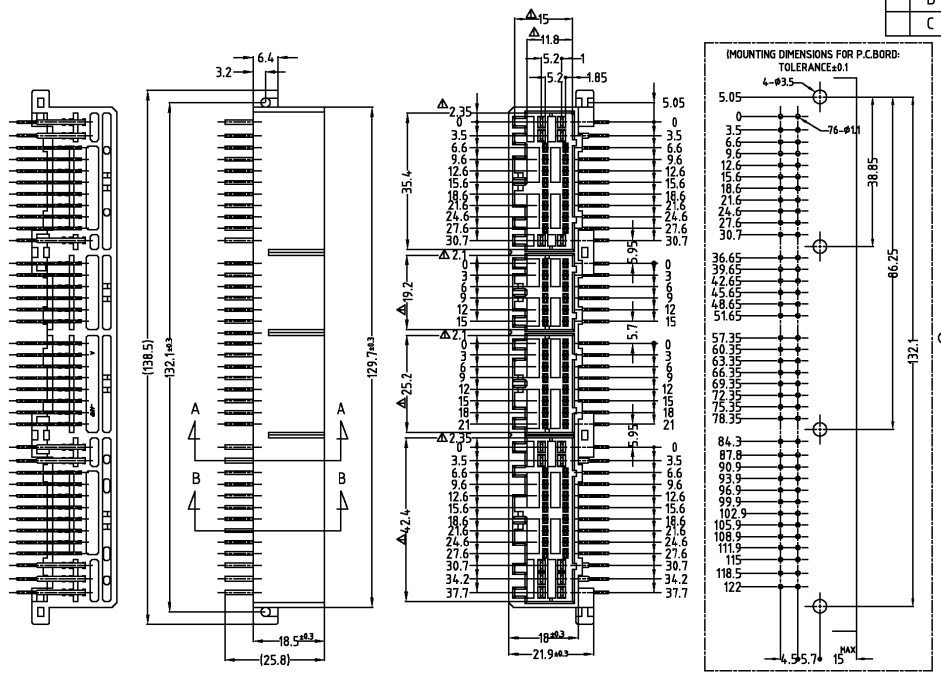

NOTE
1. MUST BE KEPT BETWEEN -X- AND 2.
2. TO BE MATED WITH THE PLUG HSG SMOOTHLY.
3. RECOMMENDED MOUNTING SCREW, 3mmDIA, 5mm LENGTH(MAX.) PAN HEAD, CLASS 2 TAPPING SCREW SPECIFIED IN JIS B1115,B1122(TIGHENING TORQUE, 4Kg-cm MAX.)
4. CIRCUIT NUMBER.

5. TIN PLATING AT SOLDERING AREA ONLY BASE MATERIAL IS PRE-TIN.

PART NO.	DESCRIPTION
368428-1	76P CAP ASS'Y

B	.070 TAB(L)	1-173739-7	11	GOLD	1
B	.070 TAB(S)	1-173739-6	14	GOLD	1
B	.040 TAB(S)	4-173738-1	56,60	GOLD	A2
B	.040 TAB(L)	4-173738-0	49,50,53,68	GOLD	A4
B	.070 TAB(L)	1-173739-5	1~5,12,13	TIN	A7
B	.070 TAB(S)	1-173739-4	6~10,15,16	TIN	A7
B	.040 TAB(S)	3-173738-8	25~32,41~48,55,57~59,69~76	TIN	A28
B	.040 TAB(L)	3-173738-7	17~24,33~40,51,52,54,61~67	TIN	A26
	76P CAP HSG	174914-6	-	GRAY	1
	DESCRIPTION	PART NO.	CIRCUIT NO. 6	COLOR/FINISH	Q'TY

THIS DRAWING IS CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS: MM
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 <XX<10 ± 0.2; 10<XX<30 ± 0.25; 30<XX ± 0.3; ANGLES ± 3°
3rd ANGLE PROJECTION
MATERIAL: PBT G15
FINISH: SEE TABLE

DWN YD LEE
CHK BM JANG
APVD CS LEE
PRODUCT SPEC ---
APPLICATION SPEC ---
WEIGHT ---

tyco Electronics
AMP KOREA. kyungsan, korea

NAME: .040/.070 76P CAP ASS'Y HYBRID I/O CONNECTOR

SIZE	CAGE CODE	DRAWING NO
A3	00779	C- 368428

SCALE 1 : 1 SHEET 1 OF 1 REV C

AMP 1470-19 REV 09MAY94

Downloaded from Elcodis.com electronic components distributor