THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
© COPYRIGHT — By —
ALL RIGHTS RESERVED

LOC	DIST
J	—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	N5	REVISED ECR-11-010934	11JUL11	TS	KB

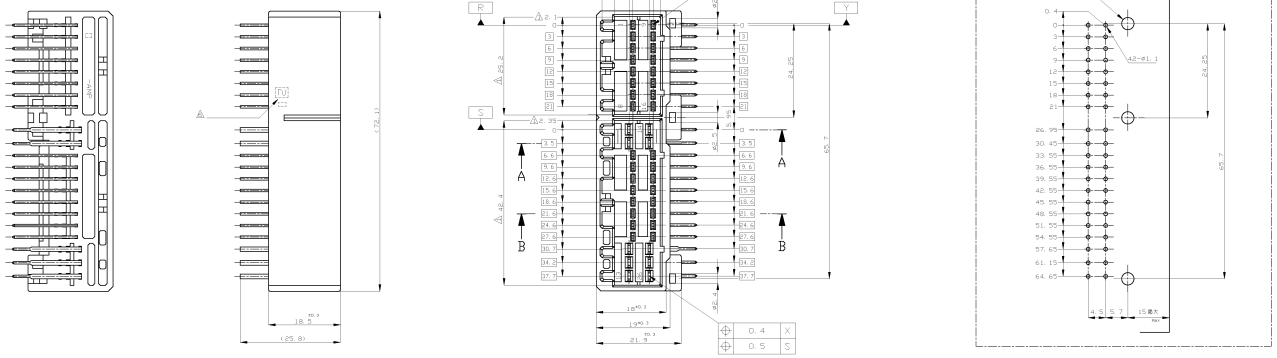

△Z 面から2mmの範囲で測定
2. 嵌合相手ハウジング型 : 174514, 174516, 917981, 917992
3. 推奨取付ねじ : #5 B115, B1122 タッピングねじ, なべ2種
　　締め堅さ 長さ 6mm以下 (締付けトルク : 0.4N-m (4kg-cm) 以下)
　↳ 適用製品規格書番号 : 108-5289, 5342
△4 回路番号 :
　　パワー回路 ①~⑨
　　シグナル回路 ①~㊷



△5 適用製品型番のプリフィックス及びIDマークを
　　カラーキットマークにて表示

△1 MUST BE KEPT BETWEEN △Z AND 2
2 THE MATING PLUG HSG PART NUMBER) 174514, 174516, 917981, 917992
3 RECOMMENDED MOUNTING SCREW(3mmDIA, 6mmLENGTH MAX.)
　PAN HEAD, CLASS 2 TAPPING SCREW SPECIFIED IN JIS
　B1115, B1122
　(TIGHTENING TORQUE : 0.4N-m{ 4kg-cm} MAX.)
4 APPLICABLE PRODUCT SPEC NO ( ) 108-5280, 108-5342
△3 CIRCUIT NUMBER
　　POWER CIRCUIT NO. ①~⑨
　　SIGNAL CIRCUIT NO. ①~㊷
△5 INDICATED PREFIX AND ID MARK OF PRODUCT P/N BY COLOR HOT MARK



断面 A-A
(SECT A-A)



断面 B-B
(SECT B-B)

SN						
10	SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 10		㉑~㉚ ㉞~㊷	WHITE 白色	5-5175446-1
9	TIN-LEAD	SELECTIVE GOLD × 2		⑲ ⑳	GRAY 灰色	9-175446-6
8	TIN-LEAD	SELECTIVE GOLD × 16		⑪~⑱	GRAY 灰色	8-175446-6
8	TIN-LEAD	SELECTIVE GOLD × 16		⑪~⑱	BLACK 黒色	8-175446-2
8	TIN-LEAD	SELECTIVE GOLD × 16		⑪~⑱	WHITE 白色	8-175446-1
7	TIN-LEAD	SELECTIVE GOLD × 3		㉑ ㉒ ㉜	BLUE 青色	7-175446-5
6	TIN-LEAD	SELECTIVE GOLD × 17	⑨	㉓~㉝	WHITE 白色	6-175446-1
5	TIN-LEAD	SELECTIVE GOLD × 12		㉑~㉜ ㉞~㊷	WHITE 白色	5-175446-1
4	TIN-LEAD	SELECTIVE GOLD × 10	⑲	㉑~㉚ ㉞~㊷	GRAY 灰色	4-175446-6
4	TIN-LEAD	SELECTIVE GOLD × 8		⑨~⑯	WHITE 白色	4-175446-1
3	TIN-LEAD	SELECTIVE GOLD × 6		㉖ ㉗ ㉘ ㉙ ㉚ ㉛	GRAY 灰色	3-175446-6
3	TIN-LEAD	SELECTIVE GOLD × 8		㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚	WHITE 白色	3-175446-1
2	TIN-LEAD	SELECTIVE GOLD × 32		⑪~㉒	GRAY 灰色	2-175446-6
2	TIN-LEAD	SELECTIVE GOLD × 32		⑪~㉒	WHITE 白色	2-175446-1
0	PRE-TINNED				GRAY 灰色	175446-6
1	SELECTIVE-TIN (MATTE) 部分すずめっき	SELECTIVE-TIN (すずめっき) ×42			WHITE 白色	175446-2
0	PRE-TINNED すずめっき ×42				WHITE 白色	175446-1
△6 MARKING マーキング	TOP SURFACE OF TAB 端子表面の上面	TYPE OF TAB 端子形状	POWER CIRCUIT NO. パワー回路	SIGNAL CIRCUIT NO. シグナル回路	HOUSING COLOR ハウジング色	PART NO.
	FINISH OF CONTACT 端子仕上 (金属)		△7 CIRCUIT NO. OF EACH POWER CONTACT 各パワー端子別回路番号			

THIS DRAWING IS A CONTROLLED DOCUMENT

DRN	K.MUKADOSAKI	17MAY05
CHK	T.SHINOHARA	17MAY05
APVD	K.BETSUI	17MAY05

TE Connectivity

NAME 名称	42POSITION CAP HOUSING ASSY 040/070 SERIES HYBRID I/O CONNECTOR
PRODUCT SPEC 製品規格	SEE NOTE 4
APPLICATION SPEC 指示書規格	
WEIGHT	—
CUSTOMER DRAWING	

SIZE	CAGE CODE	DRAWING NO. 番号	REVISION
A1	00779	175446	—
SCALE 尺度 2:1		SHEET 1 OF 1	REV N5

DIMENSIONS 単位: MM

TOLERANCES UNLESS OTHERWISE SPECIFIED 一般公差

0 PLC	X	± —
1 PLC	X	± —
2 PLC	X	± —
3 PLC	X	± —
4 PLC	X	± —
ANGLES	X	± —

GENERAL TOLERANCE

0.4 < I.D. ≤ 3.0	±0.2
3.0 < I.D. ≤ 30	±0.25
30 < I.D. ≤ 100	±0.3
ANGLES	±3°

MATERIAL 材料: HOUSING: PBT CONTACT: BRASS

FINISH 仕上: SEE TABLE 表参照

Downloaded from Elcodis.com electronic components distributor