
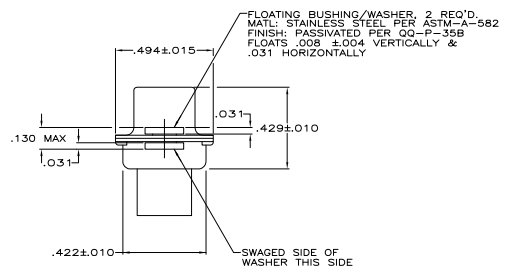
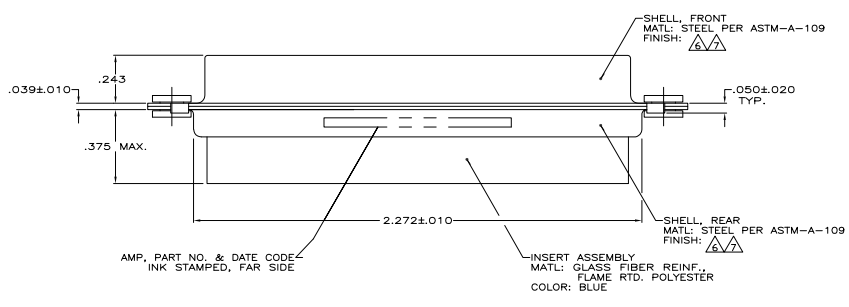


REV	DATE	DESCRIPTION	BY	CHK	APP
DF	DO				
B		REV PER ECU 05-014604			02FEB06 BL CT

1. THIS RECEPTACLE WILL MATE WITH ANY 21C4, SIZE 4 PLUG IN AMPLIMITE SERIES.
 2. MAXIMUM WIRE INSULATION TO BE USED WITH THIS RECEPTACLE IS .068 DOA.
 3. STAINLESS STEEL RETENTION CLIPS (17) ARE INCLUDED IN INSERT ASSEMBLY.
 4. THIS CONNECTOR ACCEPTS SIZE 20 SOCKET SIGNAL CONTACTS.
 5. USE 4 SIZE AND POWER OR COAX SOCKET CONTACTS. CONSULT PRODUCT ENGINEERING FOR MORE DETAILS.
- △ FINISH: CADMIUM PER QQ-P-416.
 △ FINISH: ZINC PLATED PER ASTM-B-633 .000200-.000400 THK WITH SUPPLEMENTARY CHROMATE (Cr3+).

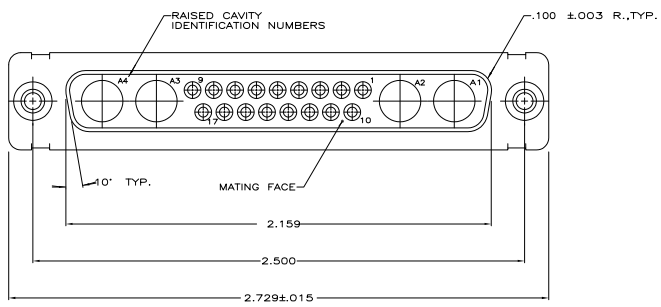

△	5-445726-1
△	445726-1
REMARKS	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		BY: SHELLEY 11-21-88	DATE: 11-23-88	REV: 1	DATE: 11-23-88
DESIGNER: [Signature]		CHKD: [Signature]	APPD: [Signature]	REVISIONS:	
MATERIALS:		SPECIFICATION:		REVISIONS:	
DIMENSIONS:		TOLERANCES:		REVISIONS:	
FINISHES:		TREATMENTS:		REVISIONS:	
MARKINGS:		DRAWING NO:		REVISED TO:	
SEE CALLOUTS		CUSTOMER DRAWING		A1 00779 (G) 445726	