



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISONS	DATE	BY	APP
H	-				
F	LNK				
C	ECR-11-004693		01APR2011	RC	AH

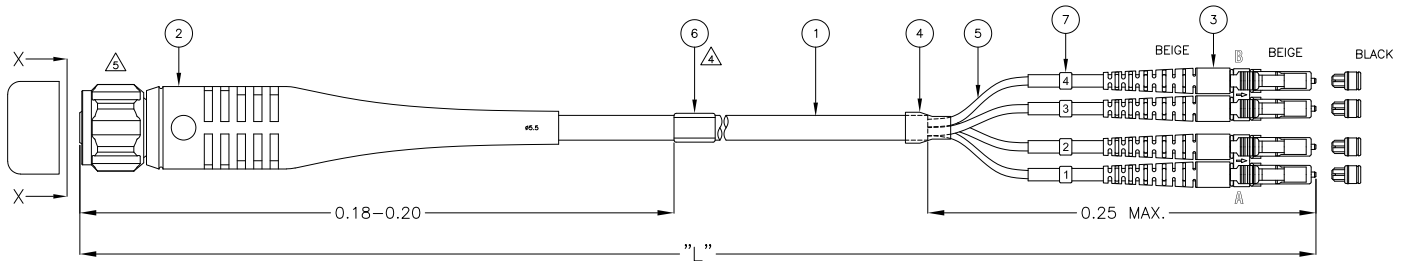

FIBER CONNECTIVITY	
ODC PLUG	LC CONN.
PIN 1	1
PIN 2	2
PIN 3	3
PIN 4	4

LABEL DETAIL:

BAR CODE

UNIQUE SERIAL NUMBER: 280420071111111 1 meter

TE CONNECTIVITY PART NUMBER: 0-1985837-1

ASSEMBLY LENGTH: 1 meter

ORDER NUMBER: 0000056329

STANDARD LENGTHS ACCORDING TO CUSTOMER DRAWING 1920950	
PART NUMBER	"L" (meter)
X-1985837-Y	XY.0

NOTES:

- REFER TO TE CONNECTIVITY CUSTOMER DRAWING 2064160 FOR CABLE ASSEMBLY LOSS AND WAVELENGTHS THAT CABLE ASSEMBLY LOSS WILL BE TESTED TO
 - MINIMUM RETURN LOSS: 20 dB FOR BOTH ODC AND LC DUPLEX CONNECTORS RETURN LOSS WILL BE TESTED AT 850 nm AND 1300 nm WAVELENGTHS
- STANDARD LENGTHS AND LENGTH TOLERANCE ACC. TO TE CONNECTIVITY CUSTOMER DRAWING 1920950
- INFORMATION ON LABEL SEE DETAIL:
- BARCODE
 - UNIQUE SERIAL NUMBER
 - ASSEMBLY LENGTH
 - TE CONNECTIVITY PART NUMBER
 - TE CONNECTIVITY ORDER NUMBER
- ALLOWABLE TORQUE: 1 Nm To 2 Nm WHEN TIGHTENING PLUG NUT

Qty	Description	Item
4	CONNECTIVITY LABEL WITH NUMBERING (1 - 4)	7
1	FOAC INFORMATION LABEL	6
4	FOAC ODC PROTECTIVE TUBING, BLACK	5
1	FOAC HEAT SHRINK TUBING, BLACK	4
2	LC DUPLEX CONNECTOR ASSEMBLY, MULTI MODE, BEIGE	3
1	FOKIT ODC PLUG ASSEMBLY, 4 FIBER, MULTI MODE, VINYL CAP	2
L	FOCAB ODC 5.5 mm 4FOLD, MULTI MODE 50/125, BLACK	1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DRW: R. COOLEN 01MAR2009	TE Connectivity
CHK: A. HENGELMÖLEN 01MAR2009	
APP: A. HENGELMÖLEN	
PRODUCT SPEC:	
APPLICATION SPEC:	
SIZE: A2	CAGE CODE: 00779
WEIGHT:	DRAWING NO: C=1985837
MATERIAL:	RESTRICTED TO:
FINISH:	CUSTOMER DRAWING

SCALE: NTS SHEET: 1 of 1 REV: C

ODC IS A TRADEMARK OF HUBER & SUHNER AG CORPORATION