


- △ MARK 00779, AMP, DATE CODE, AND PART NO ON OPPOSITE SIDE.
- △ HOUSING MATERIAL: POLYPHENYLENE SULFIDE GST-40F PER MIL-M-24519.
- △ CONTACT MATERIAL: BERYLLIUM COPPER ASTM-B-194 OR COPPER-NICKEL-SILICON PER UNS-C70260.
- △ CONTACT FINISH: .000050 [0.00127] MIN GOLD IN CONTACT AREA, .000100 [0.00254] MIN TIN-LEAD ON SOLDER TAILS, OVER .000030 [0.00076] MIN NICKEL ENTIRE CONTACT.
- △ LINES INDICATING EVERY FIVE CAVITIES ON THIS SURFACE EXCEPT END CAVITIES, STARTING FROM POSITION 1.
- △ NUMBERS INDICATING END CAVITIES ON THIS SURFACE .062±.010 [1.57±0.25] HIGH CHARACTERS.
- 7. TESTING: GROUP A AND B PER MIL-C-55302.
- △ LETTERS INDICATING OUTSIDE ROWS ON THIS SURFACE.
- △ CONTACT FINISH: .000050 [0.00127] MIN GOLD OVER .000030 [0.00076] MIN NICKEL OVER ENTIRE CONTACT.

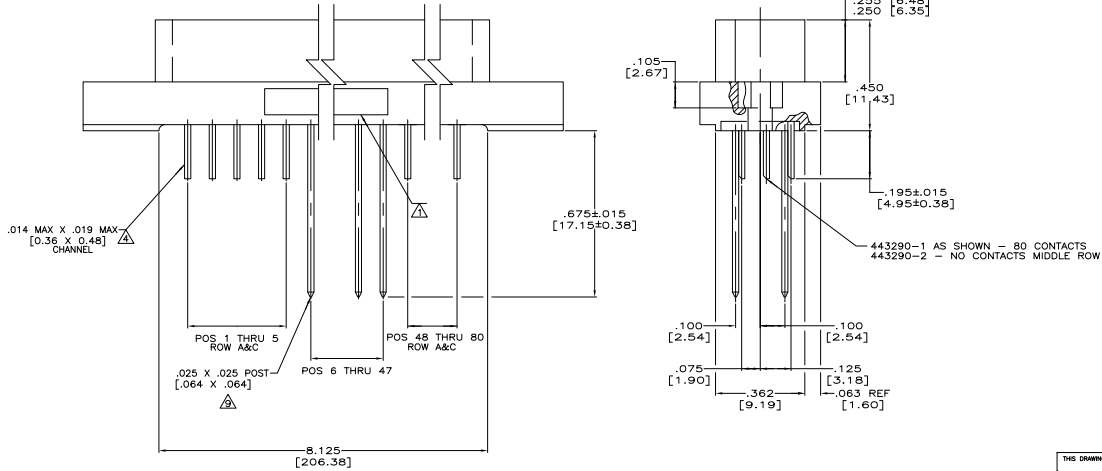

160	I	240	443290-2
240	I	240	443290-1
NO OF CONTACTS	TYPE	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		REV. ALEXANDER 1-5-58		Elytron		Teco Electronics Corporation	
DESIGNED BY J. MILLER 1-5-58		REV. MILLER 1-5-58		RECEPTACLE ASSEMBLY, BOX, 100 C/L, SELECT LEAD		Harrisburg, PA 17102-3608	
NO. OF CONTACTS	TYPE	NO. OF POSN	PART NUMBER	TOLERANCE	UNIT	REVISIONS	REWORKED TO
240	I	240	443290-1	100	0.001	A	00779 (C)-443290
CUSTOMER DRAWING		DATE 5-1		PAGE 1		REV. A	