
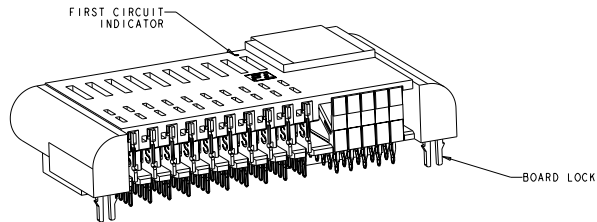


REV	DATE	DESCRIPTION	BY	CHK	APP
E	REV PER ECO-11-006492		SHOPLIN	RG	MS
E1	REV PER ECO-11-019602		SHOPLIN	RG	RP
E2	REV PER ECO-11-022096		SHOPLIN	DL	SZ

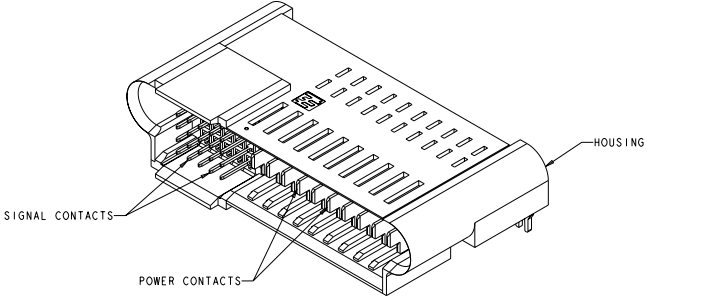




2-1926730-5 SHOWN

- HOUSING: GLASS FILLED LIQUID CRYSTAL POLYMER, COLOR: BLACK, UL 94 V-0 RATED
 SIGNAL CONTACT: PHOSPHOR BRONZE
 SIGNAL OVERMOLD: GLASS FILLED POLYESTER
 POWER CONTACT: COPPER ALLOY
 BOARD LOCKS: PHOSPHOR BRONZE
 - SIGNAL CONTACT: 0.00127mm MIN NICKEL ALL OVER,
 MATING AREA: 0.00076mm MIN GOLD OR 0.00008mm MIN GOLD OVER
 0.00076mm MIN PALLADIUM-NICKEL
 TAIL AREA: 0.0005mm MIN MATTE TIN
 POWER CONTACT: 0.00127mm MIN NICKEL ALL OVER,
 MATING AREA: 0.00076mm MIN GOLD OR
 0.00008mm MIN GOLD OVER 0.00076mm MIN PALLADIUM-NICKEL.
 TAIL AREA: 0.0005mm MIN MATTE TIN
 BOARD LOCKS: 0.00076mm MIN MATTE TIN OVER
 0.00127mm MIN NICKEL.
 - CONTACT MATING AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT,
 TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
 - THIS CONNECTOR EMPLOYS UL RECOGNIZED Z-PACK 2mm HM SIGNAL CONTACTS
- △ DATUMS AND BASIC DIMENSIONS TO BE ESTABLISHED BY CUSTOMER.
 - △ PC BOARD THICKNESS 1.4mm MIN, FOR WAVE SOLDER PC BOARD THICKNESS 2.62 MAX
 - △ SEE APPLICATION SPEC 114-13215 FOR PLATED THROUGH HOLE INFORMATION
 - 8. SEE CUSTOMER DRAWING 1926731 OR 1926733 FOR MATING CONNECTOR
 - △ UNPLATED HOLES

36	20	5	3	33.60	38.71	20S X 6P	1-1926730-0
144	40	23	10	91.10	96.21	40S X 24P	7-1926730-7
96	25	15	4	63.10	68.21	25S X 16P	4-1926730-6
72	15	11	2	48.10	53.21	15S X 12P	3-1926730-0
60	25	9	4	46.60	51.71	25S X 10P	2-1926730-5
48	25	7	4	41.10	46.21	25S X 8P	1-1926730-8
DIM F	DIM E	DIM D	DIM C	DIM B	DIM A	NUMBER OF POSITIONS	PART NUMBER

DATE: 1995-04-10		REV: 1	REV: 2	REV: 3	REV: 4	REV: 5	REV: 6	REV: 7	REV: 8
DRAWN BY: [Signature]		DESIGNED BY: [Signature]	CHECKED BY: [Signature]	APPROVED BY: [Signature]	DATE: 1995-04-10				
PART NUMBER: 2-1926730-5		CUSTOMER DRAWING		PAGE 2 OF 3					

REV		REVISIONS	
NO	DATE	DESCRIPTION	BY
AA	00	SEE SHEET 1	

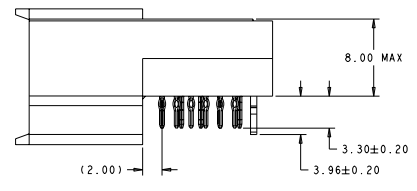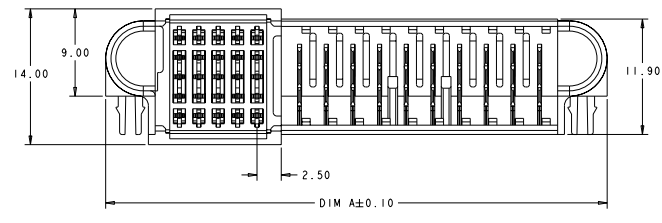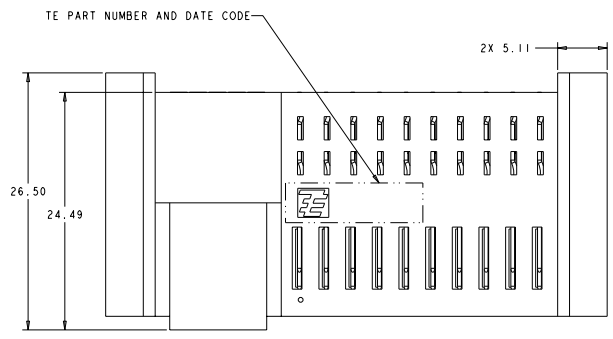

DATE: 08/12/00 BY: J. B. BRESLER CHECKED: J. B. BRESLER APPROVED: J. B. BRESLER TITLE: CUSTOMER DRAWING		DATE: 08/12/00 BY: J. B. BRESLER CHECKED: J. B. BRESLER APPROVED: J. B. BRESLER TITLE: CUSTOMER DRAWING		DATE: 08/12/00 BY: J. B. BRESLER CHECKED: J. B. BRESLER APPROVED: J. B. BRESLER TITLE: CUSTOMER DRAWING	
DATE: 08/12/00 BY: J. B. BRESLER CHECKED: J. B. BRESLER APPROVED: J. B. BRESLER TITLE: CUSTOMER DRAWING		DATE: 08/12/00 BY: J. B. BRESLER CHECKED: J. B. BRESLER APPROVED: J. B. BRESLER TITLE: CUSTOMER DRAWING		DATE: 08/12/00 BY: J. B. BRESLER CHECKED: J. B. BRESLER APPROVED: J. B. BRESLER TITLE: CUSTOMER DRAWING	

TECHNICAL SPECIFICATIONS: 190CT2007
 Type Electronics
 Harrisburg, PA 17105-3600


PLUG ASSEMBLY, RIGHT ANGLE,
 PASSIVE GUIDES, SIGNAL POWER,
 WITH BOARD LOCKS, MINIPLAK HDL

DATE: 08/12/00
 BY: J. B. BRESLER
 CHECKED: J. B. BRESLER
 APPROVED: J. B. BRESLER
 TITLE: CUSTOMER DRAWING

DATE: 08/12/00
 BY: J. B. BRESLER
 CHECKED: J. B. BRESLER
 APPROVED: J. B. BRESLER
 TITLE: CUSTOMER DRAWING

DATE: 08/12/00
 BY: J. B. BRESLER
 CHECKED: J. B. BRESLER
 APPROVED: J. B. BRESLER
 TITLE: CUSTOMER DRAWING

REV		REVISIONS	
NO.	DATE	DESCRIPTION	BY
AA	00	SEE SHEET 1	

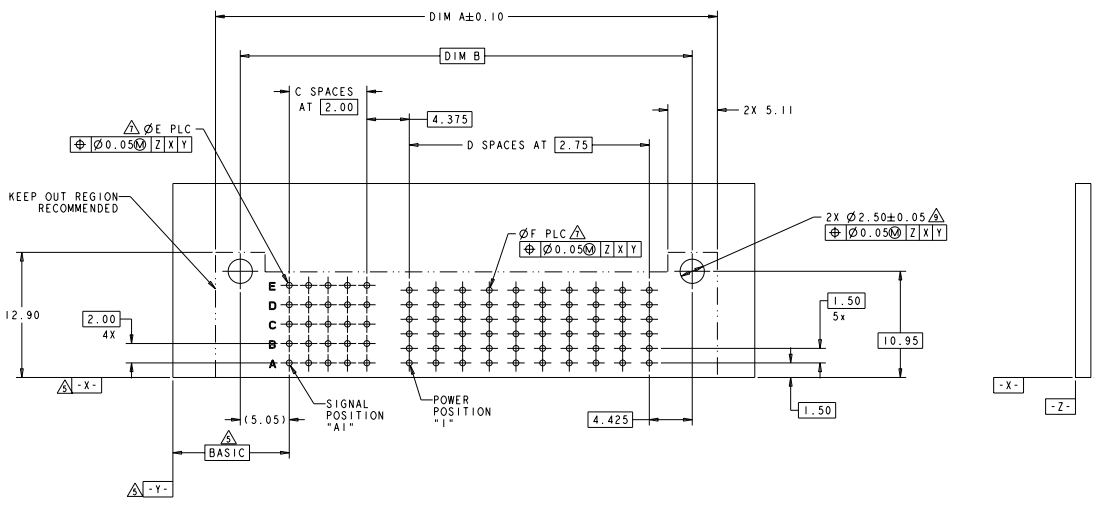

2-1926730-5 SHOWN
RECOMMENDED PRINTED CIRCUIT BOARD LAYOUT
 (AS VIEWED FROM COMPONENT SIDE)

DATE: 11/15/07 DRAWN BY: J. B. BRESLER CHECKED BY: J. B. BRESLER APPROVED BY: J. B. BRESLER TITLE: CUSTOMER DRAWING		DATE: 11/15/07 DRAWN BY: J. B. BRESLER CHECKED BY: J. B. BRESLER APPROVED BY: J. B. BRESLER TITLE: CUSTOMER DRAWING		DATE: 11/15/07 DRAWN BY: J. B. BRESLER CHECKED BY: J. B. BRESLER APPROVED BY: J. B. BRESLER TITLE: CUSTOMER DRAWING	
DATE: 11/15/07 DRAWN BY: J. B. BRESLER CHECKED BY: J. B. BRESLER APPROVED BY: J. B. BRESLER TITLE: CUSTOMER DRAWING		DATE: 11/15/07 DRAWN BY: J. B. BRESLER CHECKED BY: J. B. BRESLER APPROVED BY: J. B. BRESLER TITLE: CUSTOMER DRAWING		DATE: 11/15/07 DRAWN BY: J. B. BRESLER CHECKED BY: J. B. BRESLER APPROVED BY: J. B. BRESLER TITLE: CUSTOMER DRAWING	