



REV	DATE	DESCRIPTION	BY	CHK	APP
AD 39					
CS		REVISED PER ECO-11-010839		25M111	RK HMR

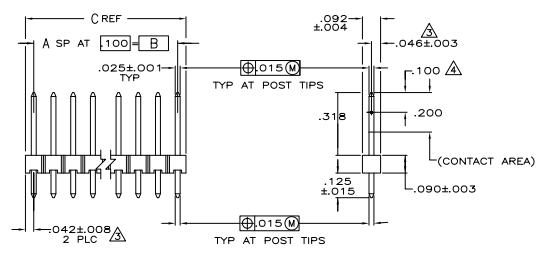

- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
  - TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- △ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
  - △ POINT OF MEASUREMENT FOR PLATING THICKNESS
  - △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI



RECOMMENDED HOLE LAYOUT

REV	DATE	DESCRIPTION	BY	CHK	APP
39					
40					
38					
37					
36					
35					
34					
33					
32					
31					
30					
29					
28					
27					
26					
25					
24					
23					
22					
21					
20					
19					
18					
17					
16					
15					
14					
13					
12					
11					
10					
9					
8					
7					
6					
5					
4					
3					
2					
1					

THIS DRAWING IS A CONTROLLED DOCUMENT.		REV	DATE	DESCRIPTION	BY	CHK	APP
AD 39							
CS				REVISED PER ECO-11-010839		25M111	RK HMR

DESIGNER	DATE	REV	DATE	DESCRIPTION

REV	DATE	DESCRIPTION	BY	CHK	APP
AD 39					
CS		REVISED PER ECO-11-010839		25M111	RK HMR