



THIS DRAWING IS UNPUBLISHED  
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
AD	00				
01		REVISED PER EDD-11-004587			

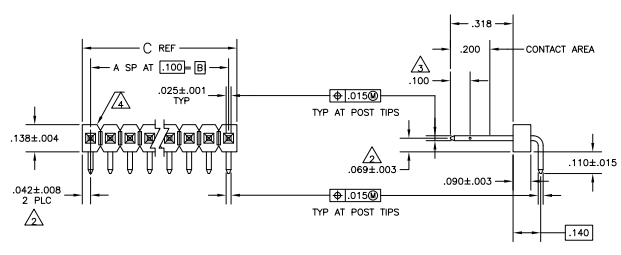

- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS.
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- POINT OF MEASUREMENT FOR PLATING THICKNESS
- BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- FINISH: POSTS - .000015 GOLD ON CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER .000050 NICKEL
- FINISH: POSTS - .000015 GOLD ON CONTACT AREA, .000100-.000200 MATTE TIN ON SOLDER TAIL, ALL OVER .000050 NICKEL
- HIGH TEMPERATURE CONFIGURATION
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

REMARKS	PLATING	C	B	A	NO OF POSN	PART NUMBER
△		3.984	3.900	39	40	9-102974-0
△		3.884	3.800	38	39	3-102974-0
△		3.784	3.700	37	38	8-102974-8
△		3.684	3.600	36	37	6-102974-7
△		3.584	3.500	35	36	8-102974-6
△		3.484	3.400	34	35	8-102974-5
△		3.384	3.300	33	34	3-102974-4
△		3.284	3.200	32	33	6-102974-3
△		3.184	3.100	31	32	6-102974-2
△		3.084	3.000	30	31	8-102974-1
△		2.984	2.900	29	30	6-102974-0
△		2.884	2.800	28	29	7-102974-9
△		2.784	2.700	27	28	7-102974-8
△		2.684	2.600	26	27	7-102974-7
△		2.584	2.500	25	26	7-102974-6
△		2.484	2.400	24	25	7-102974-5
△		2.384	2.300	23	24	7-102974-4
△		2.284	2.200	22	23	7-102974-3
△		2.184	2.100	21	22	2-102974-2
△		2.084	2.000	20	21	7-102974-1
△		1.984	1.900	19	20	7-102974-0
△		1.884	1.800	18	19	6-102974-9
△		1.784	1.700	17	18	6-102974-8
△		1.684	1.600	16	17	6-102974-7
△		1.584	1.500	15	16	6-102974-6
△		1.484	1.400	14	15	6-102974-5
△		1.384	1.300	13	14	6-102974-4
△		1.284	1.200	12	13	6-102974-3
△		1.184	1.100	11	12	6-102974-2
△		1.084	1.000	10	11	6-102974-1
OBSOLETE		.984	.900	9	10	6-102974-0
OBSOLETE		.884	.800	8	9	5-102974-9
OBSOLETE		.784	.700	7	8	5-102974-8
OBSOLETE		.684	.600	6	7	5-102974-7
OBSOLETE		.584	.500	5	6	5-102974-6
OBSOLETE		.484	.400	4	5	5-102974-5
△		.384	.300	3	4	5-102974-4
△		.284	.200	2	3	5-102974-3
△		.184	.100	1	2	5-102974-2
OBSOLETE		.084	---	1	1	6-102974-1

REMARKS	PLATING	C	B	A	NO OF POSN	PART NUMBER
△		3.984	3.900	39	40	4-102974-0
△		3.884	3.800	38	39	3-102974-9
△		3.784	3.700	37	38	3-102974-8
△		3.684	3.600	36	37	3-102974-7
△		3.584	3.500	35	36	3-102974-6
△		3.484	3.400	34	35	3-102974-5
△		3.384	3.300	33	34	3-102974-4
△		3.284	3.200	32	33	3-102974-3
△		3.184	3.100	31	32	3-102974-2
△		3.084	3.000	30	31	3-102974-1
△		2.984	2.900	29	30	3-102974-0
△		2.884	2.800	28	29	2-102974-9
△		2.784	2.700	27	28	2-102974-8
△		2.684	2.600	26	27	2-102974-7
△		2.584	2.500	25	26	2-102974-6
△		2.484	2.400	24	25	2-102974-5
△		2.384	2.300	23	24	2-102974-4
△		2.284	2.200	22	23	2-102974-3
△		2.184	2.100	21	22	2-102974-2
△		2.084	2.000	20	21	2-102974-1
△		1.984	1.900	19	20	2-102974-0
△		1.884	1.800	18	19	1-102974-9
△		1.784	1.700	17	18	1-102974-8
△		1.684	1.600	16	17	1-102974-7
△		1.584	1.500	15	16	1-102974-6
△		1.484	1.400	14	15	1-102974-5
△		1.384	1.300	13	14	1-102974-4
△		1.284	1.200	12	13	1-102974-3
△		1.184	1.100	11	12	1-102974-2
△		1.084	1.000	10	11	1-102974-1
OBSOLETE		.984	.900	9	10	1-102974-0
OBSOLETE		.884	.800	8	9	4-102974-9
OBSOLETE		.784	.700	7	8	4-102974-8
△ SUP BY 5-102974-7		.684	.600	6	7	4-102974-7
OBSOLETE		.584	.500	5	6	102974-6
OBSOLETE		.484	.400	4	5	4-102974-5
△ SUP BY 5-102974-3		.384	.300	3	4	102974-4
OBSOLETE		.284	.200	2	3	4-102974-3
OBSOLETE		.184	.100	1	2	102974-2
OBSOLETE		.084	---	1	1	4-102974-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

TE Connectivity  
 TE Connectivity  
 TE Connectivity

HEADER ASSY, MOD II,  
 BREAKAWAY, SINGLE ROW, .100  
 RIGHT ANGLE, W/.025 SD POSTS

SIZE: A1 00779 G=102974

CUSTOMER DRAWING