

4



3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	BY	APD
		H2		REVISED PER ECO-11-004587	11MAR11	RK	HMR

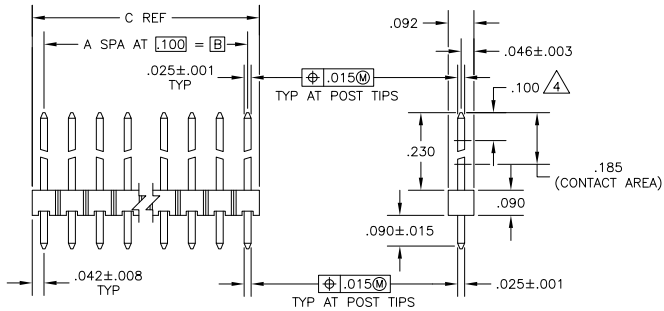

RECOMMENDED HOLE LAYOUT

- 1 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 2 ASSEMBLIES MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 3 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 4 .000030 GOLD ON THE CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON THE SOLDER TAIL, ALL OVER .000050 NICKEL
- 5 PARTS PACKAGED IN SINGLE TUBES.
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

REV	DESCRIPTION	DATE	BY	APD		
6	OBSOLETE	3.984	3.900	39	40	4-103747-1
5	OBSOLETE	3.884	3.800	38	39	3-103747-0
4	OBSOLETE	3.784	3.700	37	38	3-103747-8
3	OBSOLETE	3.684	3.600	36	37	3-103747-7
2	SUPERCEDED BY 6-146285-3	3.584	3.500	35	36	3-103747-6
1	OBSOLETE	3.484	3.400	34	35	3-103747-5
0	OBSOLETE	3.284	3.300	32	33	3-103747-4
-1	OBSOLETE	3.284	3.200	32	33	3-103747-3
-2	OBSOLETE	3.184	3.100	31	32	3-103747-2
-3	OBSOLETE	3.084	3.000	30	31	3-103747-1
-4	OBSOLETE	2.984	2.900	29	30	3-103747-0
-5	OBSOLETE	2.884	2.800	28	29	2-103747-9
-6	OBSOLETE	2.784	2.700	27	28	2-103747-8
-7	OBSOLETE	2.684	2.600	26	27	2-103747-7
-8	OBSOLETE	2.584	2.500	25	26	2-103747-6
-9	OBSOLETE	2.484	2.400	24	25	2-103747-5
-10	OBSOLETE	2.384	2.300	23	24	2-103747-4
-11	OBSOLETE	2.284	2.200	22	23	2-103747-3
-12	OBSOLETE	2.184	2.100	21	22	2-103747-2
-13	OBSOLETE	2.084	2.000	20	21	2-103747-1
-14	OBSOLETE	1.984	1.900	19	20	2-103747-0
-15	OBSOLETE	1.884	1.800	18	19	1-103747-9
-16	OBSOLETE	1.784	1.700	17	18	1-103747-8
-17	OBSOLETE	1.684	1.600	16	17	1-103747-7
-18	OBSOLETE	1.584	1.500	15	16	1-103747-6
-19	OBSOLETE	1.484	1.400	14	15	1-103747-5
-20	SUPERCEDED BY 6-146285-3	1.384	1.300	13	14	1-103747-4
-21	SUPERCEDED BY 6-146285-3	1.284	1.200	12	13	1-103747-3
-22	OBSOLETE	1.184	1.100	11	12	1-103747-2
-23	OBSOLETE	1.084	1.000	10	11	1-103747-1
-24	OBSOLETE	.984	.900	9	10	1-103747-0
-25	OBSOLETE	.884	.800	8	9	0-103747-9
-26	OBSOLETE	.784	.700	7	8	0-103747-8
-27	OBSOLETE	.684	.600	6	7	0-103747-7
-28	OBSOLETE	.584	.500	5	6	0-103747-6
-29	OBSOLETE	.484	.400	4	5	0-103747-5
-30	OBSOLETE	.384	.300	3	4	0-103747-4
-31	OBSOLETE	.284	.200	2	3	0-103747-3
-32	OBSOLETE	.184	.100	1	2	0-103747-2
-33	OBSOLETE	.084	-	-	1	0-103747-1

THIS DRAWING IS A CONTROLLED DOCUMENT. **TE Connectivity**

INCHES DIMENSIONS: 0 PLC ±.005, 1 PLC ±.005, 2 PLC ±.005, 3 PLC ±.005, 4 PLC ±.005, ANGLES ±.005, FINISH: POSTS: H2

APPROVED: L.D. RINGLEY, R. ELICKER, R. ELICKER

DATE: 7-24-05, 7-24-05, 7-24-05

APPLICATION SPEC: CUSTOMER DRAWING

SIZE: A2, CASE CODE: 103747

SCALE: 4:1, SHEET: 1 of 1, REV: H2