

4



3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS		
P	LTR	DESCRIPTION	DATE	BY
J2		REVISED PER ECO-11-004917	11MAR11	RK HMR

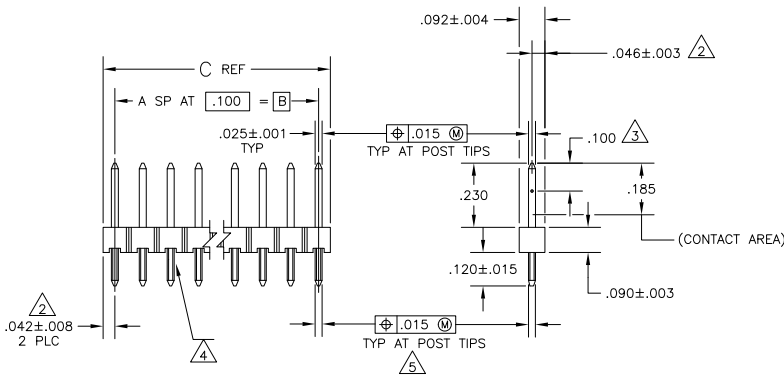

- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND THE HOUSING.
- POINT OF MEASUREMENT FOR PLATING THICKNESS.
- RETENTION FEATURES ON SOLDER TAILS, LOCATED AT MANUFACTURERS OPTION.
- Ø.020 (M) FOR KINKED TAILS.
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

	3.984	3.900	39	40	2-104344-7
OBSOLETE	3.484	3.400	34	35	2-104344-6
OBSOLETE	2.984	2.900	29	30	2-104344-5
OBSOLETE	2.584	2.500	25	26	2-104344-4
OBSOLETE	2.484	2.400	24	25	2-104344-3
OBSOLETE	2.384	2.300	23	24	2-104344-2
OBSOLETE	2.284	2.200	22	23	2-104344-1
OBSOLETE	2.184	2.100	21	22	2-104344-0
OBSOLETE	2.084	2.000	20	21	1-104344-9
SUPERCEDED	1.984	1.900	19	20	1-104344-8
OBSOLETE	1.884	1.800	18	19	1-104344-7
OBSOLETE	1.784	1.700	17	18	1-104344-6
OBSOLETE	1.684	1.600	16	17	1-104344-5
OBSOLETE	1.584	1.500	15	16	1-104344-4
OBSOLETE	1.484	1.400	14	15	1-104344-3
OBSOLETE	1.384	1.300	13	14	1-104344-2
OBSOLETE	1.284	1.200	12	13	1-104344-1
SUPERCEDED	1.184	1.100	11	12	1-104344-0
OBSOLETE	1.084	1.000	10	11	104344-9
	.984	.900	9	10	104344-8
	.884	.800	8	9	104344-7
	.784	.700	7	8	104344-6
	.684	.600	6	7	104344-5
	.584	.500	5	6	104344-4
	.484	.400	4	5	104344-3
	.384	.300	3	4	104344-2
	.284	.200	2	3	104344-1
	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DIM: H. MOLL. DATE: 08/28/08. CHK: R. FEJDT. DATE: 08/28/08. APPD: R. FEJDT. DATE: 08/28/08. PRODUCT SPEC: APPLICATION SPEC: SIZE: CASE CODE (FORMING NO): A2 00779 C=104344. RESTRICTED TO: CUSTOMER DRAWING. SCALE: 4:1. SHEET: 1 of 1. REV: J2.

TE Connectivity
 TE Connectivity
 HEADER ASSY, MOD II,BREAKAWAY, SINGLE ROW,.100 CL, VERT, .025 SQ POSTS, WITH RETENTION FEATURE