



REV	DATE	DESCRIPTION	BY	APP
AD	00			
M2		REVISED PER EDD-11-004917	11MMR11	RK HMR

- 1 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- △ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
- △ POINT OF MEASUREMENT FOR PLATING THICKNESS.
- △ RETENTION FEATURES ON SOLDER TAILS, LOCATED AT MANUFACTURERS OPTION.
- △ FOR 2 POSITION PART ONLY, THE NOTED DIM. IS .184
- △  $\phi .020(0)$  FOR KINKED TAILS
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

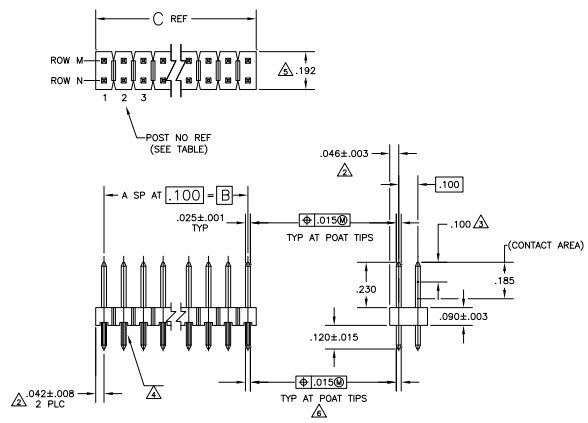

	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER
△ OBSOLETE	3.084	3.000	30	62	2-104350-1
	3.984	3.900	39	80	2-104350-0
△ OBSOLETE	2.984	2.900	29	60	1-104350-9
	2.484	2.400	24	50	1-104350-8
	1.984	1.900	19	40	1-104350-7
	1.684	1.600	16	34	1-104350-6
SUPERSEDED BY 6-146269-5	1.484	1.400	14	30	1-104350-5
	1.384	1.300	13	28	1-104350-4
△ OBSOLETE	1.284	1.200	12	26	1-104350-3
	1.184	1.100	11	24	1-104350-2
△ OBSOLETE	1.084	1.000	10	22	1-104350-1
	.984	.900	9	20	1-104350-0
	.884	.800	8	18	104350-9
	.784	.700	7	16	104350-8
	.684	.600	6	14	104350-7
	.584	.500	5	12	104350-6
	.484	.400	4	10	104350-5
	.384	.300	3	8	104350-4
	.284	.200	2	6	104350-3
	.184	.100	1	4	104350-2
	.084	---	---	2	104350-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

TE Connectivity

HEADER ASSY, MOD II, BREAKAWAY, DBL ROW, .100X100 CL, VERT, 225 SO POSTS, WITH RETENTION FEATURE.

SIZE: A1 | DATE: 10/10/00 | DRAWING NO: 104350

RESTRICTED CUSTOMER