



THIS DRAWING IS UNPUBLISHED  
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK
AD	00			
R2		REVISED PER EDD-11-004917	11MMR11	RK HMR

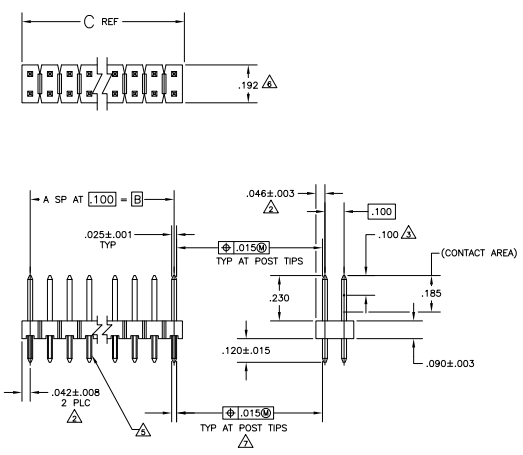

- 1 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- △ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
- △ POINT OF MEASUREMENT FOR PLATING THICKNESS.
- △ PART INDICATED IS PACKAGED IN SINGLE TUBES.
- △ RETENTION FEATURES ON SOLDER TAILS, LOCATED AT MANUFACTURERS OPTION.
- △ FOR 2 POSITION PART ONLY, THE NOTED DIMENSION IS .184
- △  $\phi 1.0200$  FOR KINKED TAILS
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI



△ OBSOLETE	1.784	1.700	17	36	2-104351-3
SUPERSEDED BY 104351-8	△ .784	.700	7	16	2-104351-2
SUPERSEDED BY 1-104351-3	△ 1.284	1.200	12	26	2-104351-1
	3.984	3.900	39	80	2-104351-0
△ OBSOLETE	2.984	2.900	29	60	1-104351-9
	2.484	2.400	24	50	1-104351-8
	1.984	1.900	19	40	1-104351-7
	1.684	1.600	16	34	1-104351-6
△ OBSOLETE	1.484	1.400	14	30	1-104351-5
SUPERSEDED BY 6-146268-4	△ 1.384	1.300	13	28	1-104351-4
	1.284	1.200	12	26	1-104351-3
	1.184	1.100	11	24	1-104351-2
SUPERSEDED BY 6-146268-1	△ 1.084	1.000	10	22	1-104351-1
	.984	.900	9	20	1-104351-0
△ OBSOLETE	.884	.800	8	18	1-104351-9
	.784	.700	7	16	1-104351-8
	.684	.600	6	14	1-104351-7
	.584	.500	5	12	1-104351-6
	.484	.400	4	10	1-104351-5
	.384	.300	3	8	1-104351-4
	.284	.200	2	6	1-104351-3
	.184	.100	1	4	1-104351-2
	.084	—	2	—	1-104351-1

REMARKS	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

TE Connectivity

HEADER ASSY, MOD II, BREAKAWAY, DBL ROW, .100K/100 CL VERT, .025 S0 POSTS, WITH RETENTION FEATURE.

SIZE: A1 | DATE: 11/01/11 | DRAWING NO: 104351

CUSTOMER DRAWING