
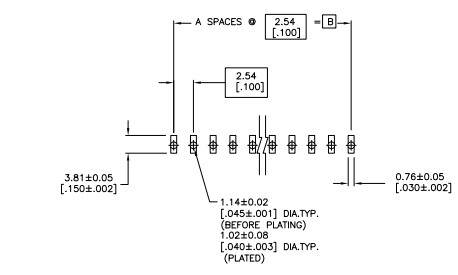


- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND THE HOUSING.
- RETENTION FEATURES ON SOLDER TAILS, LOCATED AT MANUFACTURERS OPTION.
- $\Phi 1.020(0)$ FOR KINKED TAILS
- 0.000762 [0.00030] GOLD IN CONTACT AREA, 0.00254-0.00504 [0.00100-0.00200] MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127 [0.00050] NICKEL.
- HOUSING: LCP, COLOR-BLACK.
- POSTS: PHOSPHOR BRONZE
- 0.000762 [0.00030] GOLD IN CONTACT AREA, 0.00254-0.00504 [0.00100-0.00200] MATTE TIN ON SOLDER TAIL, ALL OVER 0.00127 [0.00050] NICKEL.
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

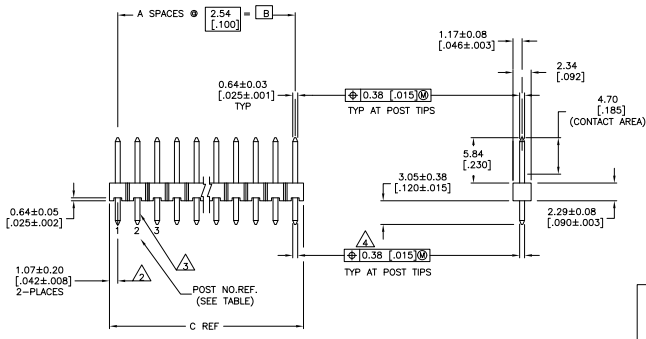

RECOMMENDED PC BOARD MOUNTING DIMENSIONS FOR .063 [1.60] THICK PC BOARD AND .012 [.305] STENCIL THICK.

NO.	DESCRIPTION	REV	DATE	BY	CHK
101.19	99.06	39	40	9-146293-0	
[3.984]	[3.900]				
98.65	96.52	38	39	8-146293-9	
[3.884]	[3.800]				
96.11	93.98	37	38	8-146293-8	
[3.784]	[3.700]				
93.57	91.44	36	37	8-146293-7	
[3.684]	[3.600]				
91.03	88.90	35	36	8-146293-6	
[3.584]	[3.500]				
88.49	86.36	34	35	8-146293-5	
[3.484]	[3.400]				
85.95	83.82	33	34	8-146293-4	
[3.384]	[3.300]				
83.41	81.28	32	33	8-146293-3	
[3.284]	[3.200]				
80.87	78.74	31	32	8-146293-2	
[3.184]	[3.100]				
78.33	76.20	30	31	8-146293-1	
[3.084]	[3.000]				
75.79	73.66	29	30	8-146293-0	
[2.984]	[2.900]				
73.25	71.12	28	29	7-146293-9	
[2.884]	[2.800]				
70.71	68.58	27	28	7-146293-8	
[2.784]	[2.700]				
68.17	66.04	26	27	7-146293-7	
[2.684]	[2.600]				
65.63	63.50	25	26	7-146293-6	
[2.584]	[2.500]				
63.09	60.96	24	25	7-146293-5	
[2.484]	[2.400]				
60.55	58.42	23	24	7-146293-4	
[2.384]	[2.300]				
58.01	55.88	22	23	7-146293-3	
[2.284]	[2.200]				
55.47	53.34	21	22	7-146293-2	
[2.184]	[2.100]				
52.93	50.80	20	21	7-146293-1	
[2.084]	[2.000]				
50.39	48.26	19	20	7-146293-0	
[1.984]	[1.900]				
47.85	45.72	18	19	6-146293-9	
[1.884]	[1.800]				
45.31	43.18	17	18	6-146293-8	
[1.784]	[1.700]				
42.77	40.64	16	17	6-146293-7	
[1.684]	[1.600]				
40.23	38.10	15	16	6-146293-6	
[1.584]	[1.500]				
37.69	35.56	14	15	6-146293-5	
[1.484]	[1.400]				
35.15	33.02	13	14	6-146293-4	
[1.384]	[1.300]				
32.61	30.48	12	13	6-146293-3	
[1.284]	[1.200]				
30.07	27.94	11	12	6-146293-2	
[1.184]	[1.100]				
27.53	25.40	10	11	6-146293-1	
[1.084]	[1.000]				
24.99	22.86	9	10	6-146293-0	
[.984]	[.900]				
22.45	20.32	8	9	5-146293-9	
[.884]	[.800]				
19.91	17.78	7	8	5-146293-8	
[.784]	[.700]				
17.37	15.24	6	7	5-146293-7	
[.684]	[.600]				
14.83	12.70	5	6	5-146293-6	
[.584]	[.500]				
12.29	10.16	4	5	5-146293-5	
[.484]	[.400]				
9.75	7.62	3	4	5-146293-4	
[.384]	[.300]				
7.21	5.08	2	3	5-146293-3	
[.284]	[.200]				
4.67	2.54	1	2	5-146293-2	
[.184]	[.100]				
2.13	0.00	0	1	146293-1	
[.084]	[.000]				

NO.	DESCRIPTION	REV	DATE	BY	CHK
101.19	99.06	39	40	4-146293-0	
[3.984]	[3.900]				
98.65	96.52	38	39	3-146293-9	
[3.884]	[3.800]				
96.11	93.98	37	38	3-146293-8	
[3.784]	[3.700]				
93.57	91.44	36	37	3-146293-7	
[3.684]	[3.600]				
91.03	88.90	35	36	3-146293-6	
[3.584]	[3.500]				
88.49	86.36	34	35	3-146293-5	
[3.484]	[3.400]				
85.95	83.82	33	34	3-146293-4	
[3.384]	[3.300]				
83.41	81.28	32	33	3-146293-3	
[3.284]	[3.200]				
80.87	78.74	31	32	3-146293-2	
[3.184]	[3.100]				
78.33	76.20	30	31	3-146293-1	
[3.084]	[3.000]				
75.79	73.66	29	30	3-146293-0	
[2.984]	[2.900]				
73.25	71.12	28	29	2-146293-9	
[2.884]	[2.800]				
70.71	68.58	27	28	2-146293-8	
[2.784]	[2.700]				
68.17	66.04	26	27	2-146293-7	
[2.684]	[2.600]				
65.63	63.50	25	26	2-146293-6	
[2.584]	[2.500]				
63.09	60.96	24	25	2-146293-5	
[2.484]	[2.400]				
60.55	58.42	23	24	2-146293-4	
[2.384]	[2.300]				
58.01	55.88	22	23	2-146293-3	
[2.284]	[2.200]				
55.47	53.34	21	22	2-146293-2	
[2.184]	[2.100]				
52.93	50.80	20	21	2-146293-1	
[2.084]	[2.000]				
50.39	48.26	19	20	2-146293-0	
[1.984]	[1.900]				
47.85	45.72	18	19	1-146293-9	
[1.884]	[1.800]				
45.31	43.18	17	18	1-146293-8	
[1.784]	[1.700]				
42.77	40.64	16	17	1-146293-7	
[1.684]	[1.600]				
40.23	38.10	15	16	1-146293-6	
[1.584]	[1.500]				
37.69	35.56	14	15	1-146293-5	
[1.484]	[1.400]				
35.15	33.02	13	14	1-146293-4	
[1.384]	[1.300]				
32.61	30.48	12	13	1-146293-3	
[1.284]	[1.200]				
30.07	27.94	11	12	1-146293-2	
[1.184]	[1.100]				
27.53	25.40	10	11	1-146293-1	
[1.084]	[1.000]				
24.99	22.86	9	10	1-146293-0	
[.984]	[.900]				
22.45	20.32	8	9	146293-9	
[.884]	[.800]				
19.91	17.78	7	8	146293-8	
[.784]	[.700]				
17.37	15.24	6	7	146293-7	
[.684]	[.600]				
14.83	12.70	5	6	146293-6	
[.584]	[.500]				
12.29	10.16	4	5	146293-5	
[.484]	[.400]				
9.75	7.62	3	4	146293-4	
[.384]	[.300]				
7.21	5.08	2	3	146293-3	
[.284]	[.200]				
4.67	2.54	1	2	146293-2	
[.184]	[.100]				
2.13	0.00	0	1	146293-1	
[.084]	[.000]				

THIS DRAWING IS A CONTROLLED DOCUMENT. IT IS THE PROPERTY OF TYS ELECTRONICS CORPORATION. IT IS TO BE KEPT IN CONFIDENTIALITY AND NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.

DATE: 01/07/79
 DRAWING NO: 146293
 CUSTOMER DRAWING