


REV	DATE	REVISIONS	BY	CHKD	APP'D
AD	00				
K		EC 023C 0209 05	ZHARRIS	BSV	JLG
K1		REVISED PER ECO-09-020932	OBSEFEN	KK	AEG

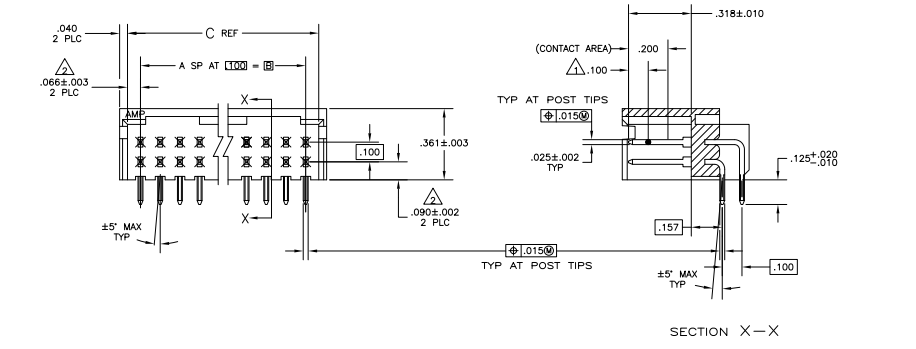

- Δ POINT OF MEASUREMENT FOR PLATING THICKNESS.
- Δ THE NOTED DIMENSION APPLIES AT THE INTERSECTION OF THE POST AND HOUSING
- Δ POSTS: .00015 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER .000050 NICKEL
- Δ POSTS: .00015 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN ON SOLDER TAIL, ALL OVER .000050 NICKEL.
- Δ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINIS

	Δ								
		3.032	2.900	29	60	7-102055-B			
		2.732	2.600	26	54	7-102055-5			
		2.532	2.400	24	50	7-102055-3			
		2.032	1.900	19	40	6-102055-B			
		1.732	1.600	16	34	6-102055-5			
		1.532	1.400	14	30	6-102055-3			
		1.232	1.100	11	24	6-102055-0			
		.932	.800	8	18	5-102055-B			
		.832	.700	7	16	5-102055-7			
		.732	.600	6	14	5-102055-6			
		.632	.500	5	12	5-102055-5			
		.532	.400	4	10	5-102055-4			
		.432	.300	3	8	5-102055-3			
		.332	.200	2	6	5-102055-2			
		1.032	.900	9	20	5-102055-1			
OBSOLETE	Δ	3.732	3.600	36	74	3-102055-5			
OBSOLETE	Δ	3.632	3.500	35	72	3-102055-4			
OBSOLETE	Δ	3.532	3.400	34	70	3-102055-3			
OBSOLETE	Δ	3.432	3.300	33	68	3-102055-2			
OBSOLETE	Δ	3.332	3.200	32	66	3-102055-1			
OBSOLETE	Δ	3.232	3.100	31	64	3-102055-0			
OBSOLETE	Δ	3.132	3.000	30	62	2-102055-9			
OBSOLETE	Δ	3.032	2.900	29	60	2-102055-8			
OBSOLETE	Δ	2.932	2.800	28	58	2-102055-7			
OBSOLETE	Δ	2.832	2.700	27	56	2-102055-6			
OBSOLETE	Δ	2.732	2.600	26	54	2-102055-5			
OBSOLETE	Δ	2.632	2.500	25	52	2-102055-4			
OBSOLETE	Δ	2.532	2.400	24	50	2-102055-3			
OBSOLETE	Δ	2.432	2.300	23	48	2-102055-2			
OBSOLETE	Δ	2.332	2.200	22	46	2-102055-1			
OBSOLETE	Δ	2.232	2.100	21	44	2-102055-0			
OBSOLETE	Δ	2.132	2.000	20	42	1-102055-9			
OBSOLETE	Δ	2.032	1.900	19	40	1-102055-8			
OBSOLETE	Δ	1.932	1.800	18	38	1-102055-7			
OBSOLETE	Δ	1.832	1.700	17	36	1-102055-6			
OBSOLETE	Δ	1.732	1.600	16	34	1-102055-5			
OBSOLETE	Δ	1.632	1.500	15	32	1-102055-4			
OBSOLETE	Δ	1.532	1.400	14	30	1-102055-3			
OBSOLETE	Δ	1.432	1.300	13	28	1-102055-2			
OBSOLETE	Δ	1.332	1.200	12	26	1-102055-1			
		1.232	1.100	11	24	1-102055-0			
		1.132	1.000	10	22	102055-9			
		.932	.800	8	18	102055-8			
		.832	.700	7	16	102055-7			
		.732	.600	6	14	102055-6			
		.632	.500	5	12	102055-5			
		.532	.400	4	10	102055-4			
		.432	.300	3	8	102055-3			
		.332	.200	2	6	102055-2			
		1.032	.900	9	20	102055-1			

THIS DRAWING IS A CONTROLLED DOCUMENT.

DATE	REVISED	BY	FOR
DRAWING		TITLE	
NO. 1	NO. 1	DATE	REVISED
1	1	102055	
CUSTOMER DRAWING		DATE	REVISED
4-1	1		

THIS DRAWING IS A CONTROLLED DOCUMENT.

NO. 1	NO. 1	DATE	REVISED
1	1	102055	
CUSTOMER DRAWING		DATE	REVISED
4-1	1		

THIS DRAWING IS A CONTROLLED DOCUMENT.

NO. 1	NO. 1	DATE	REVISED
1	1	102055	
CUSTOMER DRAWING		DATE	REVISED
4-1	1		