THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.-.-
© COPYRIGHT - By - ALL RIGHTS RESERVED

UOC	DIST
AD	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	K2	REVISED PER ECO-11-004587	11MAR11	RK	HMR

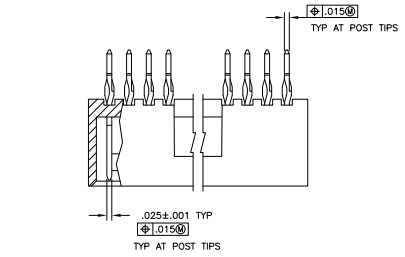

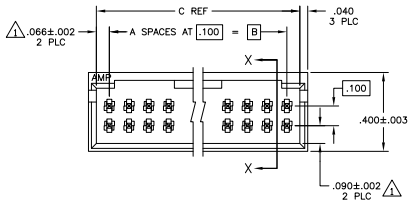





RECOMMENDED HOLE LAYOUT

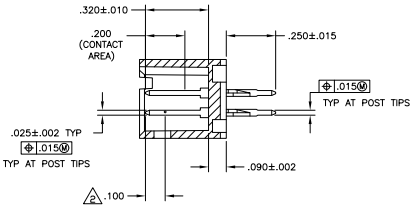

SECTION X–X

1. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
2. POINT OF MEASUREMENT FOR PLATING THICKNESS
3. MATERIAL: HOUSING– FLAME RETARDANT THERMOPLASTIC, COLOR–BLACK
   POSTS– COPPER ALLOY
4. FINISH: POSTS– .000030 GOLD ON CONTACT AREA,
   .000100–.000200 MATTE TIN–LEAD ON SOLDERTAIL,
   ALL OVER .000050 NICKEL
5. FINISH: POSTS– .000030 GOLD ON CONTACT AREA,
   .000100–.000200 MATTE TIN ON SOLDERTAIL,
   ALL OVER .000050 NICKEL
6. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

6 OBSOLETE	4	2.806	.106	3.032	2.900	29	60	~~7–102699–8~~
	4	2.306	.106	2.532	2.400	24	50	7–102699–3
	4	1.806	.106	2.032	1.900	19	40	6–102699–9
	4	1.506	.106	1.732	1.600	16	34	6–102699–6
6 OBSOLETE	4	1.306	.106	1.532	1.400	14	30	~~6–102699–4~~
	4	1.106	.106	1.332	1.200	12	26	6–102699–2
	4	.806	.106	1.032	.900	9	20	5–102699–9
6 OBSOLETE	4	—	.406	.932	.800	8	18	~~5–102699–8~~
	4	—	.306	.832	.700	7	16	5–102699–7
6 OBSOLETE	4	—	.306	.732	.600	6	14	~~5–102699–6~~
	4	—	.206	.632	.500	5	12	5–102699–5
	4	—	.206	.532	.400	4	10	5–102699–4
	4	—	.106	.432	.300	3	8	5–102699–3
	4	—	.106	.332	.200	2	6	5–102699–2
6 OBSOLETE	4	2.806	.106	3.032	2.900	29	60	~~2–102699–8~~
OBSOLETE	4	2.706	.106	2.932	2.800	28	58	2–102699–7
OBSOLETE	4	2.606	.106	2.832	2.700	27	56	2–102699–6
OBSOLETE	4	2.506	.106	2.732	2.600	26	54	2–102699–5
OBSOLETE	4	2.406	.106	2.632	2.500	25	52	2–102699–4
	4	2.306	.106	2.532	2.400	24	50	2–102699–3
OBSOLETE	4	2.206	.106	2.432	2.300	23	48	2–102699–2
OBSOLETE	4	2.106	.106	2.332	2.200	22	46	2–102699–1
OBSOLETE	4	1.906	.106	2.132	2.000	20	42	2–102699–0
	4	1.806	.106	2.032	1.900	19	40	1–102699–9
OBSOLETE	4	1.706	.106	1.932	1.800	18	38	1–102699–8
OBSOLETE	4	1.606	.106	1.832	1.700	17	36	1–102699–7
5 SUP BY 6–102699–6	4	1.506	.106	1.732	1.600	16	34	~~1–102699–6~~
OBSOLETE	4	1.406	.106	1.632	1.500	15	32	1–102699–5
	4	1.306	.106	1.532	1.400	14	30	1–102699–4
OBSOLETE	4	1.206	.106	1.432	1.300	13	28	1–102699–3
	4	1.106	.106	1.332	1.200	12	26	1–102699–2
OBSOLETE	4	1.006	.106	1.232	1.100	11	24	1–102699–1
OBSOLETE	4	.906	.106	1.132	1.000	10	22	1–102699–0
	4	.806	.106	1.032	.900	9	20	102699–9
	4	—	.406	.932	.800	8	18	102699–8
	4	—	.306	.832	.700	7	16	102699–7
	4	—	.306	.732	.600	6	14	102699–6
	4	—	.206	.632	.500	5	12	102699–5
	4	—	.206	.532	.400	4	10	102699–4
	4	—	.106	.432	.300	3	8	102699–3
	4	—	.106	.332	.200	2	6	102699–2
OBSOLETE	4	2.006	.106	2.232	2.100	21	44	102699–1
FINISH		E	D	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES
TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –.–
3 PLC ± .–
4 PLC ± .–
ANGLES ± –
MATERIAL
FINISH SEE TABLE

TDR	R BROWN	1APR05
CH	J GESFORD	1APR05
APD	J GESFORD	1APR05
PRODUCT SPEC	–	
APPLICATION SPEC	–	
WEIGHT	–	

TE Connectivity

NAME: HDR ASSY, MOD II, COMPLIANT PIN, DBL ROW, .100 X .100 CL, 4 SIDED SHROUD

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-102699	–

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV K2

4805 (3/11)

Downloaded from Elcodis.com electronic components distributor